


tb_lc2_loop: loop gain of the in-slot, load-compensated d2s_lc2 (case b), tt 27 C,

d2s_lc2 drives the pad through IOPadAnalog's 586.9 ohm (Rs); the loop is sensed at vout (padres, near side); T = -v(vout)/v(fb)

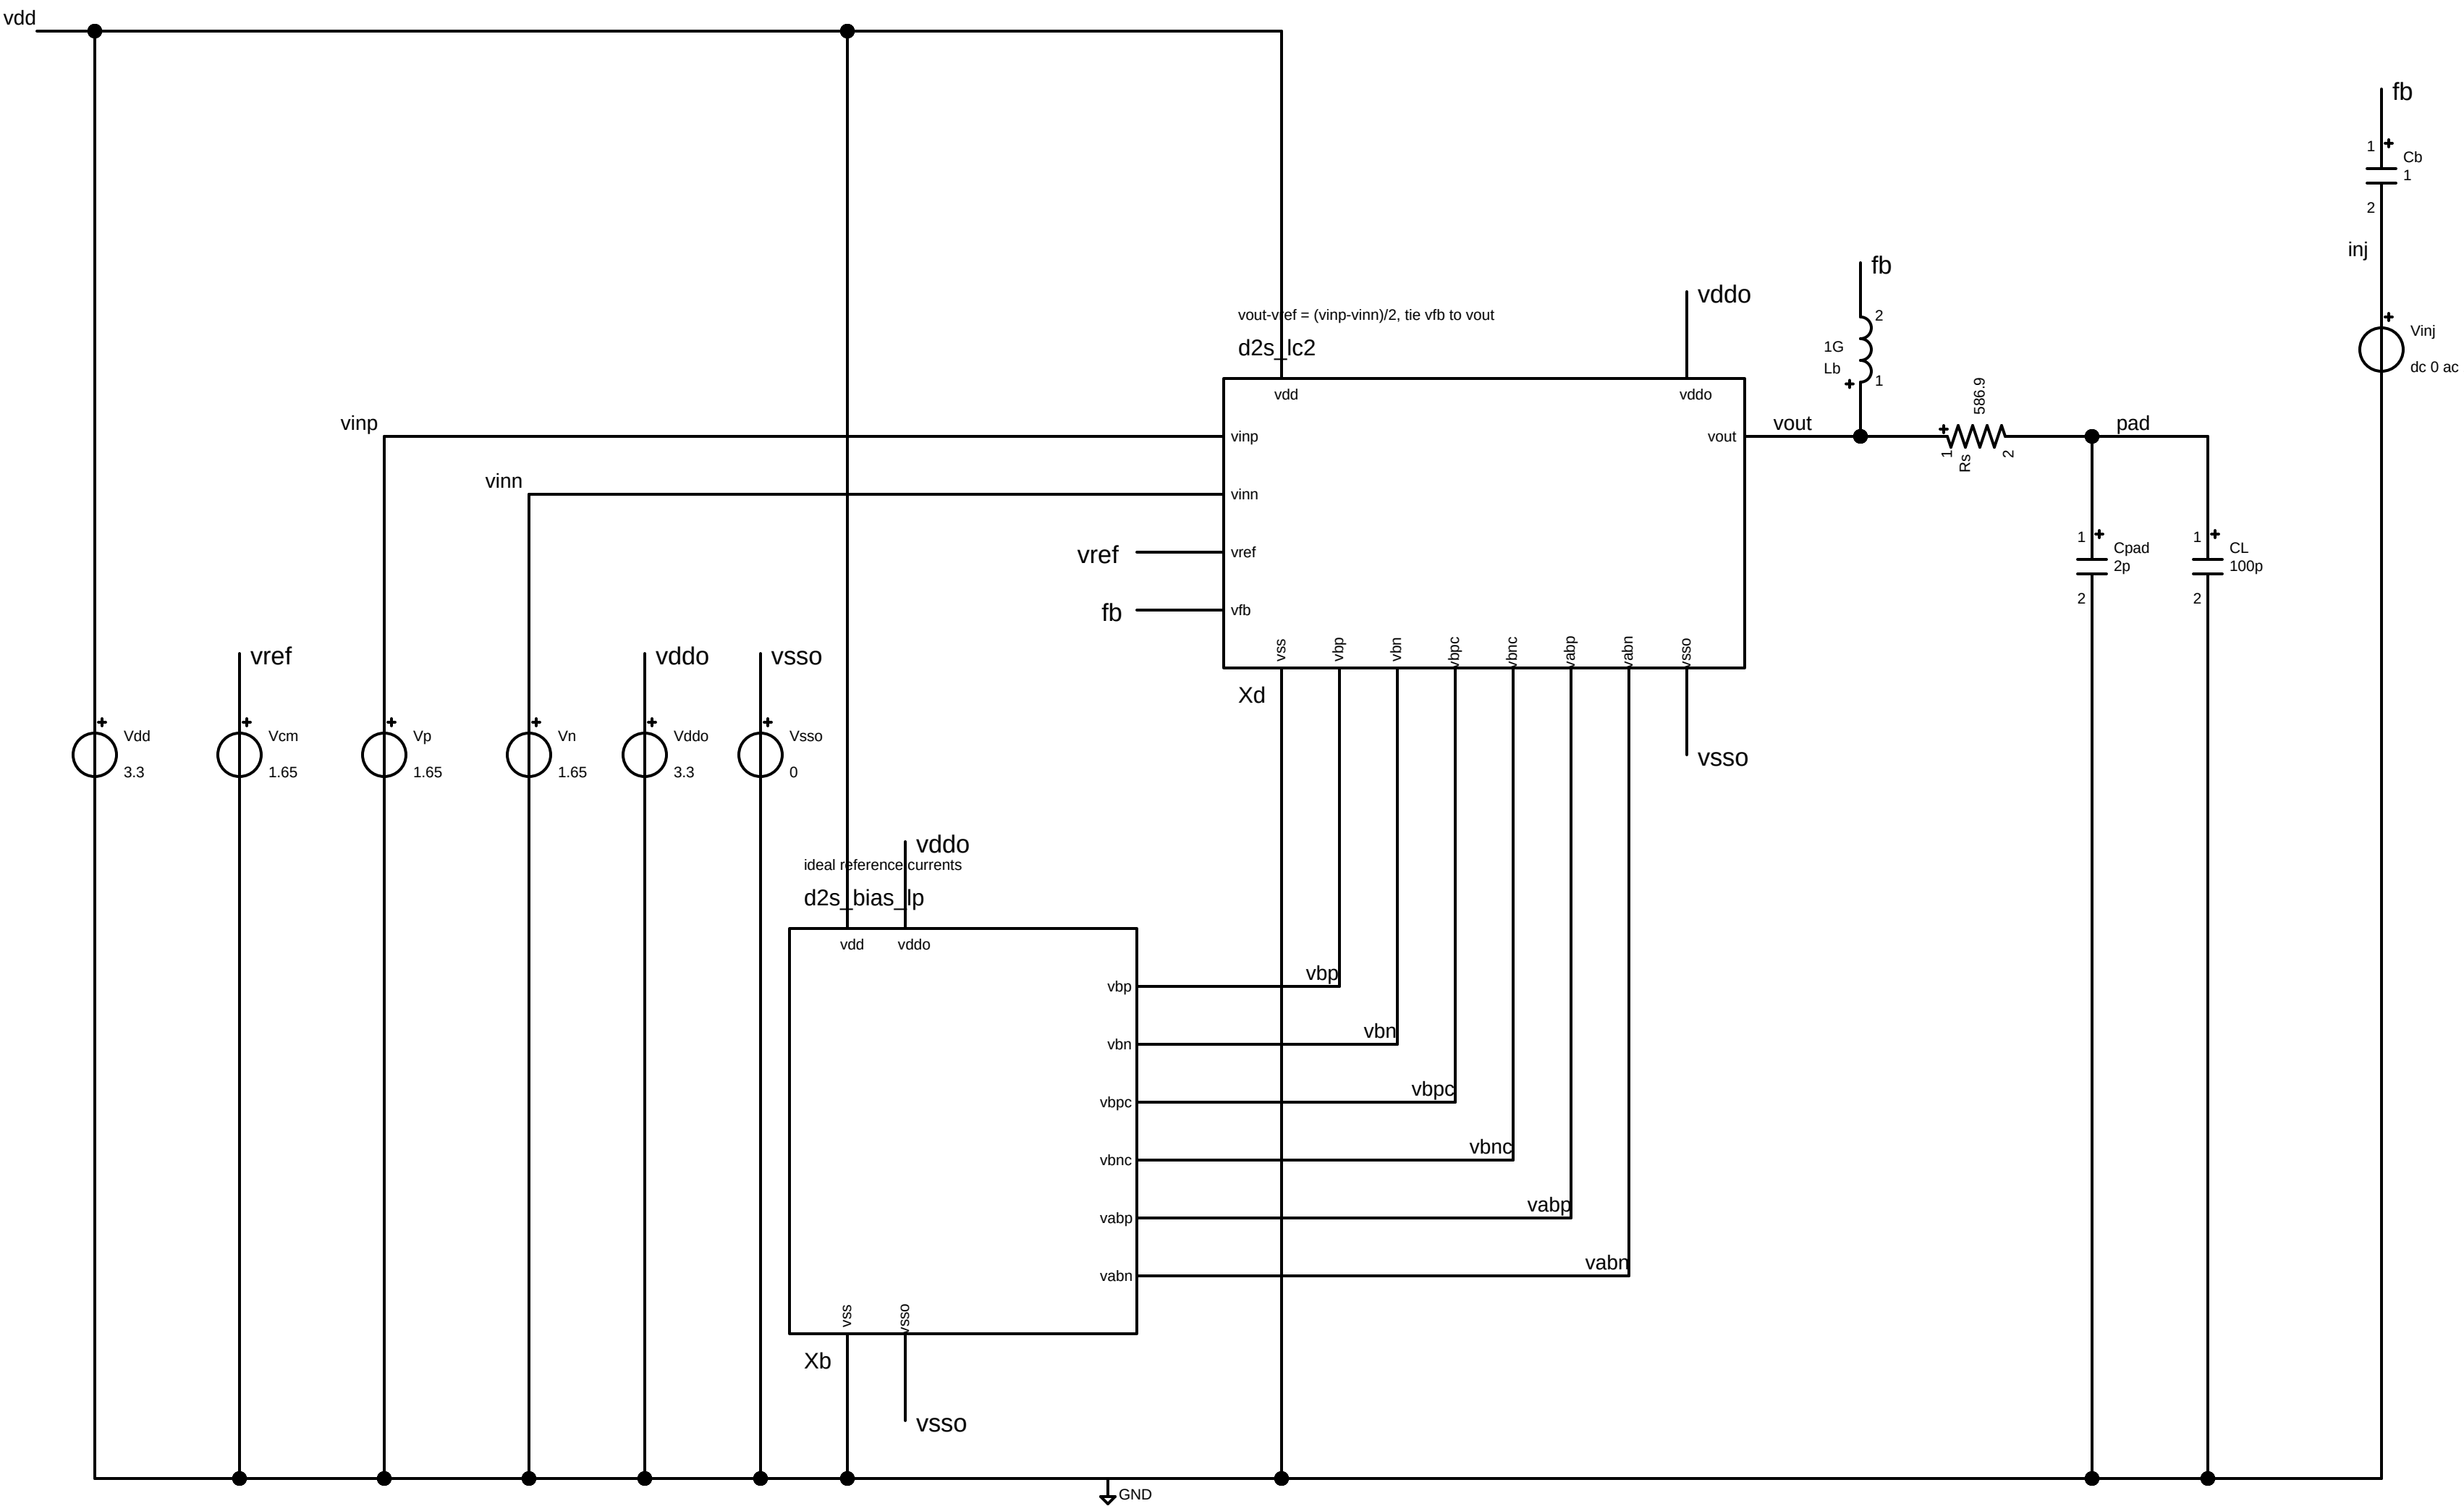

```
s1
.lib cornerMOShv.lib mos_tt
.lib cornerRES.lib res_typ
.lib cornerCAP.lib cap_typ
.control
ac dec 50 10 1G
let T=-v(vout)/v(fb)
meas ac T0 find vdb(T) at=10
meas ac fc when vdb(T)=0
meas ac pT find vp(T) when vdb(T)=0
let pm=180/pi*pT+180
print T0 fc pm
if $?batchmode = 0
    plot vdb(T) 180/pi*vp(T)
end
.endc
```