


tb_mpdda_thd: THD of d2s_mpdda, 1 V differential sine (0.5 V at the output), tt 27 C

DUT and bias from the schematics in this directory; code block = the deck's .lib/.param/.save lines and its .control section

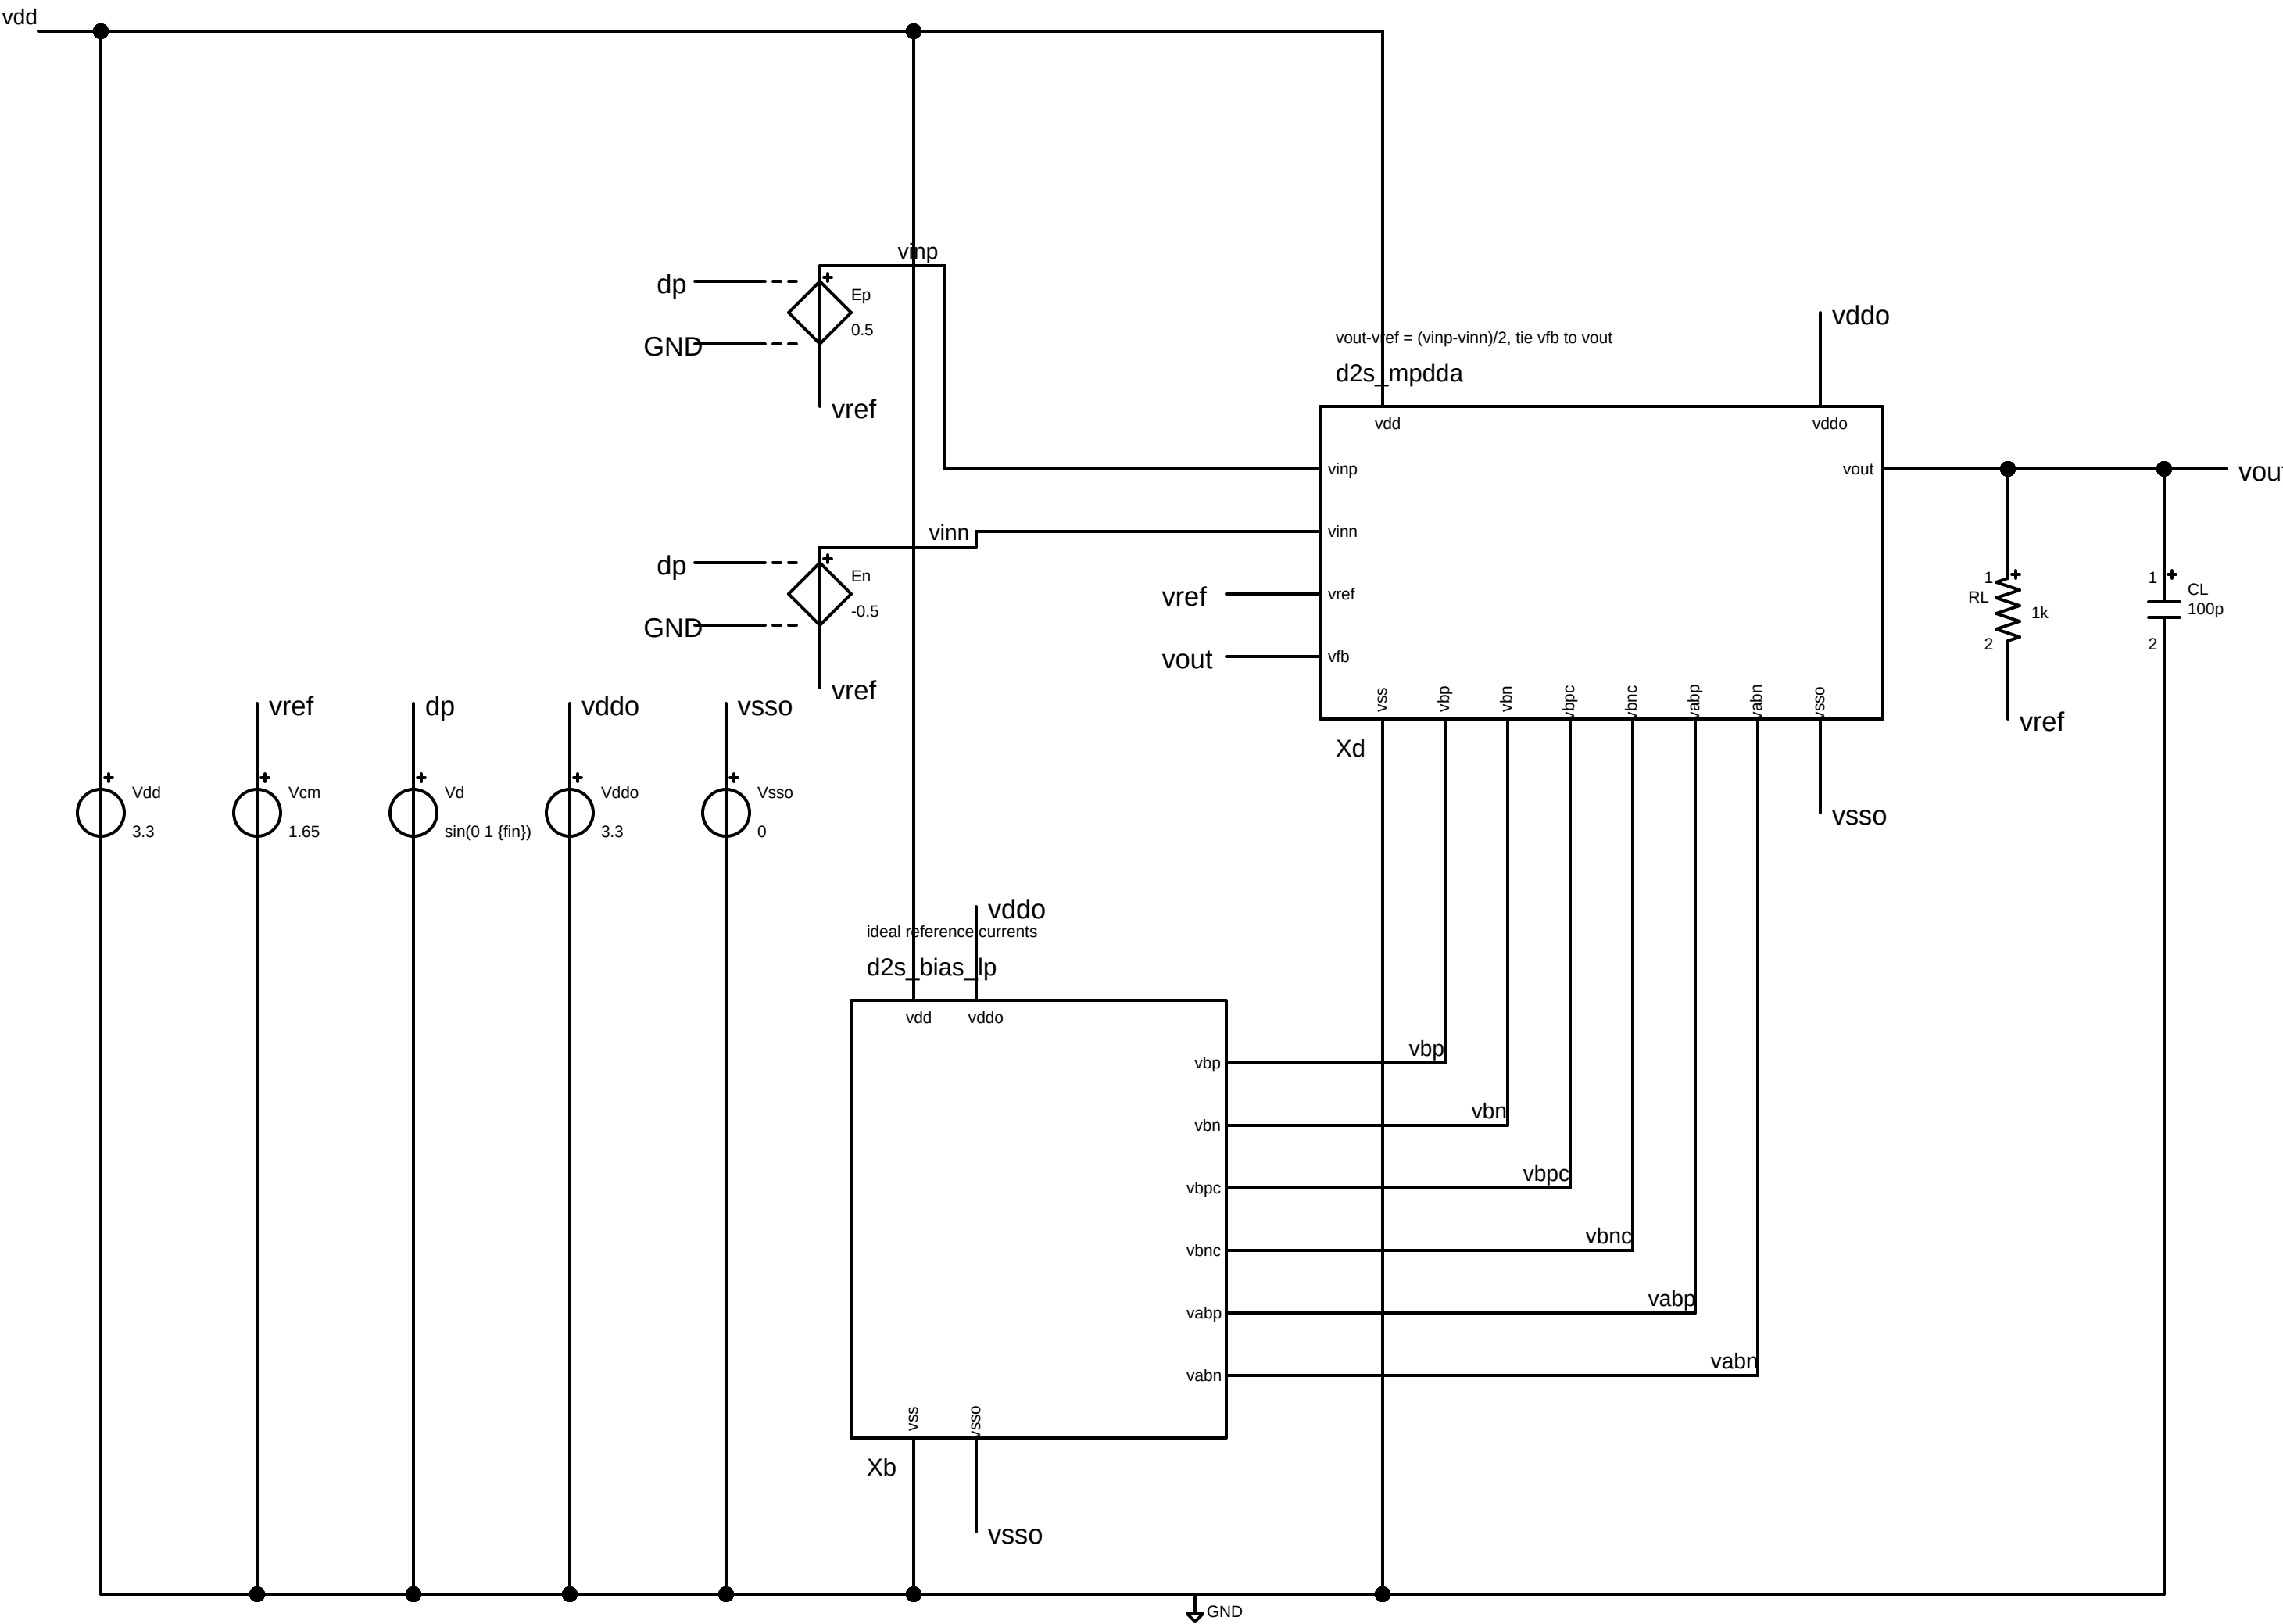

```
s1
.lib cornerM0Shv.lib mos_tt
.lib cornerRES.lib res_typ
.lib cornerCAP.lib cap_typ
.param fin=10k
.control
set nfreqs=8
tran 0.25u 600u 200u 0.25u
fourier 10k v(vout)
if $?batchmode = 0
    plot v(vout)
end
.endc
```