Vsebina in kazalo

Electronic Modules	Page

GTR Modules

MITSUBISHI 2
FUJI 4
TOSHIBA 7
SanRex 9
SanKen 10
Mosfet Module 11

IGBT Modules

MITSUBISHI 12
FUJI 15
TOSHIBA 18
SIEMENS 21
SEMIKRON 23
HITACHI 25
SanKen 27

IPM Modules

MITSUBISHI 28
FUJI 31
TOSHIBA 34
SanKen 36

PIM Modules

MOTOROLA 37
IXYS 38
SEMIKRON 39

Thyristor Modules

MITSUBISHI 41
SEMIKRON 43
EUPEC 46
SanRex 48
IR 50
IXYS 51
Nihon 53
TOSHIBA 54
CATELEC 55

Rectifier Bridge Modules

MITSUBISHI 56
FUJI 57
SEMIKRON 58
IXYS 59
POWERSEM 60
SanRex 61
TOSHIBA 62
IR 63
EUPEC 64

Diode Modules

MITSUBISHI 65
SanRex 66
FUJI 67
EUPEC 68
SEMIKRON 69
IXYS 70
MOTOROLA 71
IR 72

Vsebina in kazalo

SCR(GTO) and Diodes	Page
ABB	74
IR	76
TOSHIBA	78
FUJI	80
EUPEC	81
MITSUBISHI	84
SEMIKRON	86
WESTCODE	88
SIEMENS	116

BILCOM SI d.o.o.

Tel: +386/3 819 17 20

Fax: +386/3 819 17 21

E-mail: info@bilcom.si

BILCOM SI d.o.o
Prvomajska ulica 35

3250 Rogaška Slatina

SI - SLOVENIJA

Electronic module




























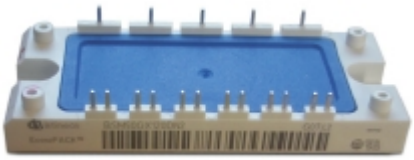









MITSUBISHI GTR



HIGH POWER SWITCHING USE INSULATED TYPE


Features

- IC Collector current ……200A
- VCEX Collector-emitter voltage ……1000V
- hFE DC current gain ……75
- Insulated Type
- UL Recognized
  Yellow Card
  No.E80276 (N)

Application


- AC motor controllers
- UPS
- Inverters
- DC motor controllers
- NC equipment
- Welders
- Servo drives
- Air conditioners
- Smallto medium size

Schematic

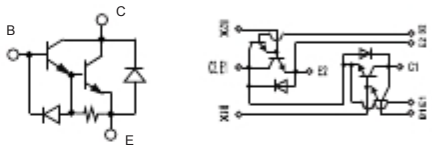

1U

2U



6U

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
QM10HA-HB	10	600	1	QM100HY-H	100	600	1
QM15HA-H	15	600	1	QM150HY-H	150	600	1
QM20HA-H(HB)	20	600	1	QM200HA-H(HK)	200	600	1
QM30HA-H(HB)	30	600	1	QM200HC-M	200	350	1
QM50HA-H(HB)	50	600	1	QM200HH-H	200	600	1
QM50HB-H	50	600	1	QM300HA-H(HB)	300	600	1
QM50HC-H(HE)	50	600	1	QM300HC-M	300	350	1
QM50HG-H	50	600	1	QM300HH-H	300	600	1
QM50HJ-H	50	600	1	QM400HA-H	400	600	1
QM75HA-H(HB)	75	600	1	QM500HA-H	500	600	1
QM100HC-M	100	350	1	QM600HD-M	600	350	1
QM5HG-24	5	1200	1	QM300HA-24(24B)	300	1200	1
QM10HB-2H(24A)	10	1000(1200)	1	QM300HA-2H(2HB)	300	1000	1
QM30HC-2H	30	1000	1	QM300HH-2H(24)	300	1000(1200)	1
QM30HQ-2H(24)	30	1000(1200)	1	QM400HA1-2H(24)	400	1000(1200)	1
QM30HY-2H	30	1000	1	QM400HA-24(24B)	400	1200	1
QM50HG-24	50	1200	1	QM400HA-2H(2HB)	400	1000	1
QM50HY-2H	50	1000	1	QM600HA-24(24K)	600	1200	1
QM100HY-2H	100	1000	1	QM600HA-24B(24BK)	600	1200	1
QM150HY-2H	150	1000	1	QM600HA-2H(2HB)	600	1000	1
QM200HA-24(24B)	200	1200	1	QM600HA-2HK(2HBK)	600	1000	1
QM200HA-2H(2HB)	200	1000(1200)	1	QM800HA-24(24B)	800	1200	1
QM200HY-24	200	1200	1	QM800HA-2H(2HB)	800	1000	1
QM15DX-H	15	600	2	QM50CY-H	50	600	2
QM20DX-H	20	600	2	QM50DX-H	50	600	2
QM30CY-H	30	600	2	QM50DY-H(HB)	50	600	2
QM30DX-H	30	600	2	QM75CY-H	75	600	2
QM30DY-H(HB)	30	600	2	QM75DX-H	75	600	2

MITSUBISHI GTR

Parameters


Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
QM75DY-H	75	600	2	QM30E3Y-H	30	600	2
QM75DY-HB(HD)	75	600	2	QM50E1Y-H	50	600	2
QM100CY-H	100	600	2	QM50E2Y-H	50	600	2
QM100DQ-H	100	600	2	QM50E3Y-H(HD)	50	600	2
QM100DX-H	100	600	2	QM75E1Y-H	75	600	2
QM100DY-H(HK)	100	600	2	QM75E2Y-H	75	600	2
QM100DY-HB(HBK)	100	600	2	QM75E3Y-H(HD)	75	600	2
QM120DX-H	120	600	2	QM100E2Y-H(HK)	100	600	2
QM150CY-H	150	600	2	QM100E3Y-H(HD/HE/HK)	100	600	2
QM150DH-H	150	600	2	QM150E2Y-H(HE/HK)	150	600	2
QM150DX-H	150	600	2	QM150E3Y-24	150	600	2
QM150DY-H(HK)	150	600	2	QM150E3Y-H(2H)	150	600	2
QM150DY-HB(HBK)	150	600	2	QM150E3Y-HD(HE/HK)	150	600	2
QM200DP-H	200	600	2	QM150E3Y-HE	150	600	2
QM200DY-H(HB)	200	600	2	QM150E3Y-HK	150	600	2
QM300DY-H(HB)	300	600	2	QM200E2Y-H(HB/HE)	200	600	2
QM25E3Y-HE	25	600	2	QM200E3Y-H	200	600	2
QM30E2Y-H	30	600	2				
QM15DX-2H(24)	15	1000(1200)	2	QM200DY-2H(2HB)	200	1000	2
QM25DY-2HA	25	1000	2	QM300DY-24(24B)	200	1200	2
QM30DX-24	30	1200	2	QM300DY-2H(2HB)	300	1000	2
QM30DY-2H(24)	30	1000(1200)	2	QM800HA-24	800	1200	2
QM50DY-24	50	1200	2	QM10E3Y-2HB	10	1000	2
QM50DY-2H(2HA/2HB/2HF)	50	1000	2	QM30E2Y-2H(24)	30	1000(1200)	2
QM75DY-24(24B)	75	1200	2	QM30E3Y-2H(24)	30	1000(1200)	2
QM75DY-2H(2HB)	75	1000	2	QM50E2Y-2H(24)	50	1000(1200)	2
QM80DY-3H(3HA)	80	1400	2	QM50E3Y-2H(24)	50	1000(1200)	2
QM100DY-24(24K/24BK)	100	1200	2	QM75E2Y-2H(24)	75	1000(1200)	2
QM100DY-2H(2HA/2HB)	100	1000	2	QM75E3Y-2H(24)	75	1000(1200)	2
QM100DY-2HK(2HBK)	100	1000	2	QM100E2Y-24	100	1200	2
QM150DY-24(24K)	150	1200	2	QM100E2Y-2H(2HK)	100	1000	2
QM150DY-24B(24BK)	150	1200	2	QM100E3Y-24	100	1200	2
QM150DY-2H(2HK)	150	1000	2	QM100E3Y-2H(2HK)	100	1000	2
QM150DY-2HB(2HBK)	150	1000	2	QM150E2Y-24	150	1200	2
QM150DY-3H	150	1400	2	QM150E2Y-2H(2HK)	150	1000	2
QM200DY1-2H	200	1000	2	QM150E3Y-2HK	150	1000	2
QM200DY-24(24B)	200	1200	2				
QM10TD-H	10	600	6	QM30TF-H(HB)	30	600	6
QM15T1B-9	15	500	6	QM30TX-H(HB)	30	600	6
QM15TB-H(9)	15	600(500)	6	QM50TB2-H	50	600	6
QM15TC-H	15	600	6	QM50TB-H	50	600	6
QM15TD-9(9B)	15	500	6	QM50TF-H(HB)	50	600	6
QM15TD-H(HB)	15	600	6	QM50TX-H(HB)	50	600	6
QM15TG-9B	15	500	6	QM75TF-H(HB)	75	600	6
QM20TB-H	20	600	6	QM75TX-H(HB)	75	600	6
QM20TC-H	20	600	6	QM100TA-H	100	600	6
QM20TD-9(9B)	20	500	6	QM100TF-H(HB)	100	600	6
QM20TD-H(HB)	20	600	6	QM100TR-HB	100	600	6
QM20TG-9B	20	500	6	QM100TX1-H(HB)	100	600	6
QM30TB1-H	30	600	6	QM100TX-H(HB)	100	600	6
QM30TB-H(9)	30	600(500)	6				
QM10TB-24	10	1200	6	QM30TB-24(24B)	30	1200	6
QM10TB-2H(2HB)	10	1000	6	QM30TB-2H(2HB)	30	1000	6
QM15TB-24(24B)	15	1200	6	QM50TB-24(24B)	30	1200	6
QM15TB-2H(2HB)	15	1000	6	QM50TB-2H(2HB)	50	1000	6
QM25TB-2H(2HB)	25	1000	6				







FUJI GTR

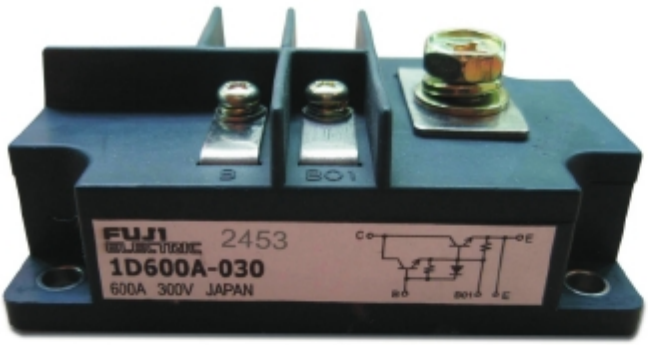

POWER TRANSISTOR MODULE
INSULATED TYPE


Features

- High Voltage
- Including Free Wheeling Diode
- Excellent Safe Operating Area
- Insulated Type
- High speed switching
- High DC Current Gain


Application

- High Power Switching
- A.C Motor Controls
- D.C Motor Controls
- Uninterruptible Power Supply
- Motor Brake in Inverter
- Air conditioners


Schematic



1U



2U



6U

Parameters


Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
1DI15A-050(060)	15	500(600)	1	1DI200H-055	200	550	1
1DI30A-050(060)	30	500(600)	1	1DI200K-055	200	550	1
1DI30D-050A	30	500	1	1DI200MA-050	200	500	1
1DI30F-050	30	500	1	1DI240A-055(060)	240	550(600)	1
1DI30MA-050	30	500	1	1DI300A-030	300	300	1
1DI50A-050(055/060)	50	500(550/600)	1	1DI300M-050	300	500	1
1DI50D-050A	50	500	1	1DI300ZN-050	300	500	1
1DI50E-055	50	550	1	1DI30A-050(060)	30	500(600)	1
1DI50H(K)-055	50	500	1	1DI30D-050A	30	500	1
1DI50MA-050	75	500	1	1DI30F-050	30	500	1
1DI75D-050A	75	500	1	1DI30MA-050	30	500	1
1DI75E(F)-055	75	550	1	1DI400A-050	400	500	1
1DI100D-050	100	500	1	1DI480A-055	480	550	1
1DI100E-050(055)	100	500(550)	1	1DI500A-030(030A)	500	300	1
1DI100F-050(055)	100	500(550)	1	ETG81-050(050A)	30	500	1
1DI100MA-050	100	500	1	ETK81-060(060B)	50	600	1
1DI150D-050	150	500	1	ETK85-050	75	500	1
1DI150E-055	150	550	1	ETL81-050(050A)	100	500	1
1DI150F-055	150	550	1	ETN31-055	200	550	1
1DI150H-055	150	550	1	ETN35-030	300	300	1
1DI200A-030	200	300	1	ETN36-030	300	300	1
1DI200A-055	200	550	1	ETN81-050(055)	200	500(550)	1
1DI200E-050(055)	200	500(550)	1	ETN85-050	300	500	1
1DI200F-055	200	550	1				
1DI30F-100	30	1000	1	1DI75E-100(120)	75	100(1200)	1
1DI50E-120	50	1200	1	1DI75F-100(120)	75	100(1200)	1
1DI50F-100(120)	50	1000(1200)	1	1DI75H-120	75	1200	1
1DI50H-120	50	1200	1	1DI100E-100(120)	100	100(1200)	1

FUJI GTR

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
1DI100F-100(120)	100	1000(1200)	1	1DI300B-120	300	1200	1
1DI100H-120	100	1000	1	1DI300D-100	300	1000	1
1DI150E-100(120)	150	1000(1200)	1	1DI300G-100	300	1000	1
1DI150F-100(120)	150	1000(1200)	1	1DI300M-120(140)	300	1200(1400)	1
1DI150GE-100	150	1000	1	1DI300MN-120(140)	300	1200(1400)	1
1DI150GF-100	150	1000	1	1DI300MP-120(140)	300	1200(1400)	1
1DI150H-120	150	1200	1	1DI300Z-100	300	1000	1
1DI200A-120(140)	200	1200(1400)	1	1DI300Z-120(140)	300	1200(1400)	1
1DI200A-120B	200	1200	1	1DI300ZN-120	300	1200	1
1DI200M-120	200	1200	1	1DI300ZP-120	300	1200	1
1DI200Z-100	200	1000	1	1DI400A-120	400	1200	1
1DI200Z-120(140)	200	1200(1400)	1	1DI400D-100(120)	400	1000(1200)	1
1DI200ZA-120	200	1200	1	1DI400MN-120	400	1200	1
1DI200ZN-120	200	1200	1	1DI400MP-120	400	1200	1
1DI200ZP-120	200	1200	1	1DI400X-120	400	1200	1
1DI300A-120(140)	300	1200(1400)	1	1DI800X-120	800	1200	1
2DI30D-050A	30	500	2	2DI200MB-050	\200	500	2
2DI30M-050	30	500	2	2DI200MC-050	200	500	2
2DI50D-050A(055A)	50	500(550)	2	2DI200ZA-050	200	500	2
2DI50M-050	50	500	2	2DI240A-055	240	550	2
2DI50MA-050	50	500	2	2DI300A-050	300	500	2
2DI60E-060	60	600	2	2DI300M-050	300	500	2
2DI75D-050A(050B)	75	500	2	2DI1100M(MA)-050	1100	500	2
2DI75D-055A	75	500	2	2DI1150M(MA)-050	1150	500	2
2DI75M-050	75	500	2	2DI1200MC-050	1200	500	2
2DI75S-050(050A)	75	500	2	EVG31-050(050A)	30	500	2
2DI100D-050(050C)	100	500	2	EVK31-050(050A)	50	500	2
2DI100D-060	100	600	2	EVK31-060	50	600	2
2DI100M-050	100	500	2	EVK71- 050(050D)	75	500	2
2DI100MA-050	100	500	2	EVK71-050B	75	500	2
2DI120A-030	120	300	2	EVK71-055	75	550	2
2DI150D-050(060)	150	500(600)	2	EVK71-060(060D)	75	600	2
2DI150M-050	150	500	2	EVK75-050(050B)	75	500	2
2DI150MA-050	150	500	2	EVL31-050(055)	100	500(550)	2
2DI150MB-050	150	500	2	EVL31-060	100	600	2
2DI200A-050(050P)	200	500	2	EVL32-050(055)	120	600	2
2DI200M-050	200	500	2	EVL32-060(060D)	120	600	2
2DI200MA-050	200	500	2				2
2DI30A-100	30	1000	2	2DI75Z-100	75	1000	2
2DI30A-120(140)	30	1200(14000	2	2DI75D-120	75	1200	2
2DI30A-120B	30	1200	2	2DI75M-120	75	1200	2
2DI30D-100	30	1000	2	2DI75MA-120	75	1200	2
2DI30Z-100	30	1000	2	2DI75Z-120(140)	75	1200(1400)	2
2DI30Z-120	30	1200	2	2DI75ZA-100	75	1000	2
2DI50A-120(140)	50	1200(1400)	2	2DI100A-120(140)	100	1200(1400)	2
2DI50A-120A	50	1200	2	2DI100A-120A	100	1200	2
2DI50D-100	50	1000	2	2DI100B-120B	100	1200	2
2DI50Z-100	50	1000	2	2DI100D-100	100	1000	2
2DI50M-120	50	1200	2	2DI100Z-100	100	1000	2
2DI50Z-120(140)	50	1200(1400)	2	2DI100M-120(120A)	100	1200	2
2DI50ZB-100	50	1000	2	2DI100MA-120	100	1200	2
2DI50ZP-100	50	1000	2	2DI100Z-120(140)	100	1200(1400)	2
2DI75A-120(140)	75	1200(1400)	2	2DI100ZA-100	100	1000	2
2DI75A-120A	75	1200	2	2DI150A-100A	150	1000	2
2DI75B-120(120B)	75	1200	2	2DI150A-120(140)	150	1200(1400)	2
2DI75D-100	75	1000	2	2DI150A-120A	150	1200	2



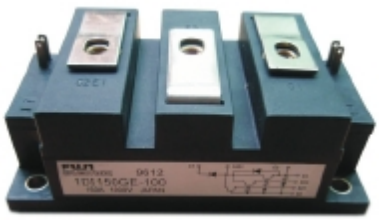

FUJI GTR

Parameters


Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
2DI150B-120(120B)	150	1200	2	2DI150MA-120	150	1200	2
2DI150D-100	150	1000	2	2DI150Z-120(140)	150	1200(1400)	2
2DI150Z-100	150	1000	2	2DI150ZA-100	150	1000	2
2DI150G-100	150	1000	2	2DI200A-100	200	1000	2
2DI150M-120	15	1200	2	2DI200D-100	200	1000	2
6DI10A-050	10	500	6	6DI50AH-050	150	500	6
6DI15A-050	15	500	6	6DI50B-050	150	500	6
6DI10MS-050(050A)	10	500	6	6DI50C-050(060)	150	500(600)	6
6DI15A-040	15	400	6	6DI50M-050	150	500	6
6DI15MS-050	15	500	6	6DI50MA-050	150	500	6
6DI15S-050(050C/050D)	15	500	6	6DI50MB-050	150	500	6
6DI15Z-050	15	500	6	6DI75A-050(060)	75	500(600)	6
6DI20A-040	20	400	6	6DI75AH-050	75	500	6
6DI20B-050	20	500	6	6DI75M-050	75	500	6
6DI20C-060	20	600	6	6DI75MA-050	75	500	6
6DI20MS-060	20	600	6	6DI75MB-050	75	500	6
6DI20C-050	20	500	6	6DI80A-050	80	500	6
6DI20D-040	20	400	6	6DI85A-050(060)	85	500(600)	6
6DI20MS-050	20	500	6	6DI100A-050	100	500	6
6DI20MS-050A	20	500	6	6DI100A-060	100	600	6
6DI20S-050D	20	500	6	6DI100E-080	100	800	6
6DI30A-050	30	500	6	6DI100M-050	100	500	6
6DI30AH-050	30	500	6	6DI100MA-050	100	500	6
6DI30B-050(060)	30	500(600)	6	6DI120A-060	120	600	6
6DI30M-050	30	500	6	6DI120C-060	120	600	6
6DI30MA-050	30	500	6	6DI120D-060	120	600	6
6DI30MS-050A	30	500	6	6DI150A-050(060)	150	500(600)	6
6DI50A-050	50	500	6	6DI150AH-050(060)	150	500(600)	6
6DI50A-055	50	550	6	6DI150D-060	150	600	6
6DI50A-060	50	600	6	6DI150M-060	150	600	6
6DI10A-120	10	1200	6	6DI30Z-120	30	1200	6
6DI15A-120	15	1200	6	6DI50A-120	50	1200	6
6DI15M-120	15	1200	6	6DI50M-120	50	1200	6
6DI30A-120	30	1200	6	6DI50Z-120	50	1200	6
6DI30M-120	30	1200	6	6D50A-120ELX	50	1200	6









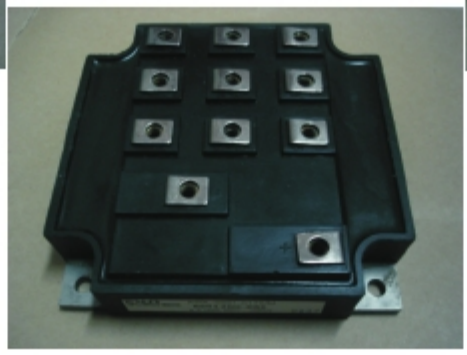



TOSHIBA GTR




DARLINGTON TRANSISTORS
INSULATED TYPE

Features

- Electrodes are isolated from the heat sink (2500VAC)
- High DC current Gain (h_{FE}) (80 or 100 MIN).
- Low saturation voltage (2 or 2.5V maximum).
- Wide safe operating area.

Application

- High Power Switching
- A.C Motor Controls
- D.C Motor Controls
- Uninterruptible Power Supply
- Motor Brake in Inverter
- Air conditioners

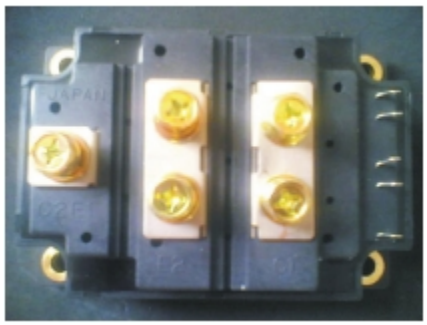


Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
MG15G1AL1(L2/L3)	15	450	1	MG300H1FK1	300	600	1
MG15G1AM1	15	450	1	MG300H1FL1	300	600	1
MG15H1AL1	15	600	1	MG300N1FK1	300	1100	1
MG30(50)G1BL3	30(50)	450	1	MG300N1FL1	300	1100	1
MG100G1AL1(L2/L3)	100	450	1	MG400G1UL1	400	450	1
MG150M(Q)2YK1	150	1000(1200)	1	MG400H1FK1	400	600	1
MG200H1AL1(L2)	200	600	1	MG400H1FL1	400	600	1
MG200H1F21A	200	600	1	MG400H1UL1	400	600	1
MG200H1FL1A	200	600	1	MG50G1BL1(L2/L3)	500	450	1
MG200H1JK1	200	600	1				
MG25M1BK1	25	1000	1	MG200Q1UK1	200	1200	1
MG50M1BK1	50	1000	1	MG300M1FK1	300	1000	1
MG60M1AL1	60	1000	1	MG300M1UK1	300	1000	1
MG75M1BK1	75	1000	1	MG300N1FK1(K2)	300	1100	1
MG75Q1BK1	75	1200	1	MG300N1FL1	300	1100	1
				MG300Q1UK1	300	1200	1
MG30D2YM1	30	600	2	MG50G2DM1	50	450	2
MG30G2CL1(L2/L3)	30	450	2	MG50G2YM1	50	450	2
MG30G2DL1	30	450	2	MG75G2CL1	75	450	2
MG30G2YD1	30	450	2	MG75G2YL1	75	450	2
MG30G2YL1	30	450	2	MG75H2CL1(L2)	75	600	2
MG30G2YM1	30	450	2	MG75H2YL1	75	600	2
MG50D2DM1	50	600	2	MG100G2CH2	100	450	2
MG50G2CL1(L2/L3/L4)	50	450	2	MG100G2DL1(L2)	100	450	2

TOSHIBA GTR

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
MG100G2YL1(L2)	100	450	2	MG150G2YL1	150	450	2
MG100H2CK1	100	600	2	MG150H2CL1	150	600	2
MG100H2CL1(L2)	100	600	2	MG150H2DL1	150	600	2
MG100H2DL1(L2)	100	600	2	MG150H2YL1	150	600	2
MG100HYL1(L2)	100	600	2	MG200H2CK1	200	600	2
MG150G2DL1	150	450	2	MG200H2CL1	200	600	2
MG25M2CK1(K2)	25	1000	2	MG75M2YK1	75	1000	2
MG25M2YK1(K9)	25	1000	2	MG75Q2YK1	75	1200	2
MG25N2CK1	25	1100	2	MG80S2YK1	80	1400	2
MG25N2YK1	25	1100	2	MG100M2CK1	100	1000	2
MG300Q2CMAOX	300	1200	2	MG100M2YK1	100	1100	2
MG40S2YK1	40	1400	2	MG100N2CK1	100	1100	2
MG50M2CK1(K2)	50	1000	2	MG100Q2YK1	100	1200	2
MG50M2YK1	50	1000	2	MG150M2CK1	150	1000	2
MG50N2CK1	50	1100	2	MG150M2YK1	150	1000	2
MG50N2YK1	50	1100	2	MG150N2CK1	150	1100	2
MG50Q2YK1	50	1200	2	MG150Q2YK1	150	1200	2
MG75M2CK1	75	1000	2				
MG10G6EL1(L2)	10	450	6	MG50J6EL1	50	600	6
MG10H6EM1	10	600	6	MG75G6EL1(L9)	75	450	6
MG15D6EM1	15	600	6	MG75H6EL1	75	600	6
MG15G6EL1(L2)	15	450	6	MG8G6EM1	8	450	6
MG15G6EM1	15	450	6	MG10Q6EK1	10	1200	6
MG20G6EL1(L2)	20	450	6	MG15N6EK1	15	1100	6
MG30D6EL1	30	600	6	MG20Q6EK1	20	1200	6
MG30G6EL1(L2)	30	450	6	MG25N6EK1	25	1100	6
MG50G6EL1(L9)	50	450	6				

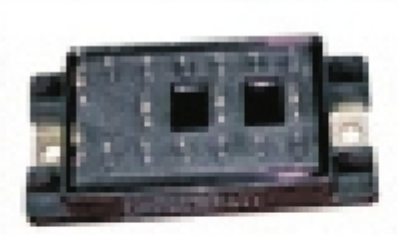











SanRex GTR



TRANSISTOR MODULE


Features

- high power Darlington transistors
- Each transistor has a reverse paralleled fast recovery diode.
- Low saturation voltage for higher efficiency.
- Isolated mounting base
- VEBO 10V for faster switching speed.


Application

- Motor Control(VVVF)
- AC/DC Servo
- UPS
- Switching Power Supply
- Ultrasonic Application

Schematic



Series

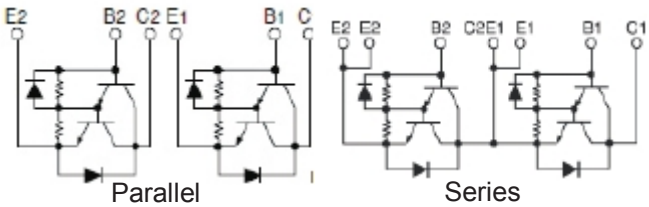

Parallel Series

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
SQD200A40(60)	200	400(600)	1	SQD200AA100(120)	200	1000(1200)	1
SQD400BA60	400	600	1	SQD300AA100(120)	300	1000(1200)	1
SQD300A(BA)60	300	600	1	SQD400AA100(120)	400	1000(1200)	1
QCA75A60	75	600	2	QCA100BA60	100	600	2
QCA100A60	100	600	2	QCA150BA60	150	600	2
QCA150A60	150	600	2	QCA200BA60	200	600	2
QCA200A60	200	600	2	QCA300BA60	300	600	2
QCA30B60	50	600	2	QCB30A60	30	600	2
QCA50B60	50	600	2	QCB50A60	50	600	2
QCA75BA60	75	600	2	QCB75A60	75	600	2
QCA30AA100(120)	30	1000(1200)	2	QCA100AA100(120)	100	1000(1200)	2
QCA50AA100(120)	50	1000(1200)	2	QCA150AA100(120)	150	1000(1200)	2
QCA75AA100(120)	75	1000(1200)	2	QCA200AA100(120)	200	1000(1200)	2
QF15AA60	15	600	6	QF30AA60	30	600	6
QF20AA60	20	600	6	QF50AA60	50	600	6

SanKen GTR



POWER TRANSISTOR MODULE
INSULATED TYPE

Features

- High Voltage
- Including Free Wheeling Diode
- Excellent Safe Operating Area
- Insulated Type
- High speed switching
- High DC Current Gain

Application

- High Power Switching
- A.C Motor Controls
- D.C Motor Controls
- Uninterruptible Power Supply
- Motor Brake in Inverter
- Air conditioners

Schematic

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
ST15X6	15	600	6	ST300Z1H	300	1200	2
ST20X6	20	600	6	ST400Z1H	400	1200	2
ST30X6	30	600	6	ST600Z1H	600	1200	2
ST30Y2	30	600	2	FST30Z2	30	1200	2
ST50Y2	50	1200	2	FST50Z2	50	1200	2
ST75Y2	75	1200	2	FST75Z2	75	1200	2
ST100Y2	100	1200	2	FST100Z2	100	1200	2
ST150Y2	150	1200	2	FST150Z2	150	1200	2
ST200Y2	200	1200	2	FST30Z6	30	1200	6
ST300Y2	300	1200	2				

Mosfet Module



POWER TRANSISTOR MODULE
INSULATED TYPE


Features

- High Voltage
- Including Free Wheeling Diode
- Excellent Safe Operating Area
- Insulated Type
- High speed switching
- High DC Current Gain


Application

- High Power Switching
- A.C Motor Controls
- D.C Motor Controls
- Uninterruptible Power Supply
- Motor Brake in Inverter
- Air conditioners

Schematic



SKM



FM 2U

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
FBA50BA(CA)50	50	500	2	SF100AA20	100	200V	1
FBA75BA(CA)50	75	500	2	SF100AA(BA)50	100	500V	1
FCA50CC50	50	500	2	SF150AA20(50)	150	200(500)V	1
FCA75BA50	75	500	2	SF200AA(BA)10	200	200V	1
FCA75CC50	75	500	2	SF200AA20	200	200V	1
				SF100CB100	100	1000V	1
FM75HA-10	75	600	1	UM75CDY-10	75	600V	2
FM100HY-10	100	600	1	UM100CDY-10	100	600V	2
FM50DY-9(10)	50	500(600)	2	UM150CDY-10	150	600V	2
BSM(SKM)101AR	200	50	1	PD4(7)M440H	30(50)	500	2
BSM(SKM)111AR	200	100	1	PD10M440H	85	500	2
BSM(SKM)121AR	130	100	1	2MI50F-050	50	500V	2
BSM(SKM)141AR	200	100	1	2MI100F-050	100	500V	2
BSM(SKM)151F	200	100	1				
BSM(SKM)181F	36	800	1				
BSM(SKM)191F	28	1000	1				







MITSUBISHI IGBT



POWER TRANSISTOR MODULE
INSULATED TYPE


Features

- Low Drive Power
- Low VCE(sat)
- Discrete Super-Fast Recovery
- ree-Wheel Diode
- High Frequency Operation
- Isolated Baseplate for Easy
- Heat Sinking

Application

- AC Motor Control
- Motion/Servo Control
- UPS
- Welding Power Supplies

Schematic

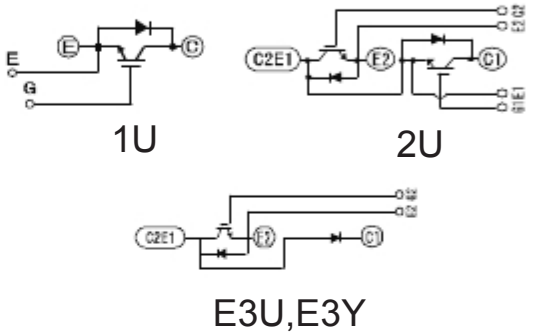

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
CM100HA-12H	100	600	1	CM450HA-5F	450	250	1
CM200HA-12H	200	600	1	CM600HA-12H(E)	600	600	1
CM300HA-12	300	600	1	CM600HA-5F	600	250	1
CM300HA-12H(E)	300	600	1	CM600HN-5F	600	250	1
CM400HA-12H(E)	400	600	1	CM600HU-12H(F)	600	600	1
CM400HA-24	400	1200	1	CM800HUS-12H	800	600	1
CM200HA-24H	200	1200	1	CM600HA-20F	600	600	1
CM200HA-28H	200	1400	1	CM600HA-24H(24E)	600	1000	1
CM200HU-24E	200	1200	1	CM600HA-28H	600	1200	1
CM300HA1-24H	300	1200	1	CM600HU-24H(24E/24F)	600	1400	1
CM300HA-24	300	1200	1	CM800HA(HD)-50H	800	1200	1
CM300HA-24H(24E)	300	1200	1	CM800HA(HD)-66H	800	2500	1
CM300HA-28H	300	1400	1	CM800HA-24H(24E)	800	3300	1
CM300HU-24E	300	1200	1	CM800HB-66H	800	1200	1
CM400HA1-24H	400	1200	1	CM1000HA-24H(24E)	1000	3300	1
CM400HA-24H(24E)	400	1200	1	CM1000HA-28H	1000	1400	1
CM400HA-28H	400	1400	1	CM1200HA-50H	1200	2500	1
CM400HA-34H	400	1700	1	CM1200HA-66H	1200	3300	1
CM400HU-24E	400	1200	1	CM1200HB-66H	1200	3300	1
CM400HU-24H(24F)	400	1200	1				
CM25DY-12	25	600	2	CM75DY-12H	75	600	2
CM50DM1-12H	50	600	2	CM100DU-12H(12F/12E)	100	600	2
CM50DY-12H(12E)	50	600	2	CM100DUS-12F	100	600	2
CM75DU-12H(12E/12F)	75	600	2	CM100DY-12H	100	600	2
				CM150CDY-10	150	500	2
				CM150DU-12H(12F)	150	600	2

MITSUBISHI IGBT

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
CM150DY-12	150	600	2	CM600DU-5F	600	250	2
CM150DY-12H(12E)	150	600	2	CM600DY-12NF	600	600	2
CM150DY-12NF	150	600	2	CM800DU-12H	800	600	2
CM200DU-12H(12F/12E)	200	600	2	CM1200DY-12H	1200	600	2
CM200DU-12NF	200	600	2	CM50E3U(E3Y)-12E	50	600	2
CM200DY-12	200	600	2	CM50E3Y-12(12H)	50	600	2
CM200DY-12H(12E)	200	600	2	CM50E3Y-12G	50	600	2
CM200DY-12NF	200	600	2	CM75E3U-12H	75	600	2
CM300DU-12H(12F)	300	600	2	CM75E3U(E3Y)-12E	75	600	2
CM300DY-12	300	600	2	CM75E3Y-12(12F)	75	600	2
CM300DY-12H(12E)	300	600	2	CM75E3Y-12G	75	600	2
CM300DY-12NF	300	600	2	CM100E3U-12H	100	600	2
CM350DU-5F	350	250	2	CM100E3U(E3Y)-12E	100	600	2
CM350DY-5F	350	250	2	CM150E3U(E3Y)-12E	150	600	2
CM400DU-12H(12F)	400	600	2	CM150E3U-12H	150	600	2
CM400DU-5F	400	250	2	CM200E3U(E3Y)-12E	200	600	2
CM400DY1-12E	400	600	2	CM200E3U(E3Y)-12H	200	600	2
CM400DY-12	400	600	2	CM300E3U(E3Y)-12E	300	600	2
CM400DY-12H(12E)	400	600	2	CM300YE2N-12F	300	600	2
CM400DY-12NF	400	600	2	CM300YE2P-12F	300	600	2
CM400DY-12NFA	400	600	2				
CM50DU-24H(24E/24F)	50	1200	2	CM300DY-24A	300	1200	2
CM50DY-24H(24E)	50	1200	2	CM300DY-24G	300	1200	2
CM50DY-28H	50	1400	2	CM300DY-24H(24E)	300	1200	2
CM75DU-20	75	1000	2	CM300DY-24J	300	1200	2
CM75DU-24H(24E/24F)	75	1200	2	CM300DY-24NF	300	1200	2
CM75DY-20	75	1000	2	CM300DY-28H	300	1400	2
CM75DY-24H(24E)	75	1200	2	CM300DY-34A	300	1700	2
CM75DY-28H	75	1400	2	CM300DY-34NF	300	1700	2
CM75DY-28K	75	1400	2	CM400DU-24NF	400	1200	2
CM100DK-24E	100	1200	2	CM400DY-24A	400	1200	2
CM100DU-24H(24E/24F)	100	1200	2	CM400DY-24NF	400	1200	2
CM100DU-24NFH	100	1200	2	CM400DY-50H	400	2500	2
CM100DU-34KA	100	1700	2	CM400DY-66H	400	3300	2
CM100DY-20	100	1000	2	CM600DU-24F	600	1200	2
CM100DY-24A	100	1200	2	CM600DU-24NF	600	1200	2
CM100DY-24H(24E)	100	1200	2	CM600DY-24A	600	1200	2
CM100DY-24NF	100	1200	2	CM600DY-24NF	600	1200	2
CM100DY-28K	100	1400	2	CM800DZ-34H	800	1700	2
CM100DY-34A	100	1700	2	CM900DU-24NF	900	1200	2
CM150DK-24E	150	1200	2	CM30E3Y-24	30	1200	2
CM150DU-24H(24E/24F)	150	1200	2	CM50E3U-24H(24E)	50	1200	2
CM150DU-34KA	150	1700	2	CM50E3Y-24	50	1200	2
CM150DY-20	150	1000	2	CM50E3Y-24G	50	1200	2
CM150DY-24A	150	1200	2	CM50E3Y-24H(24E)	50	1200	2
CM150DY-24H(24E)	150	1200	2	CM75E3U-24H(24E/24F)	75	1200	2
CM150DY-24NF	150	1200	2	CM75E3U-34K	75	1700	2
CM150DY-28H	150	1400	2	CM75E3U-34KA	75	1700	2
CM200DU-24H(24E/24F)	200	1200	2	CM75E3Y-24	75	1200	2
CM200DY-24A	200	1200	2	CM75E3Y-24E	75	1200	2
CM200DY-24H(24E)	200	1200	2	CM75E3Y-24G	75	1200	2
CM200DY-24NF	200	1200	2	CM100E3U-24H(24E/24F)	100	1200	2
CM200DY-28H	200	1400	2	CM100E3Y-24E	100	1200	2
CM300DU-24H(24E/24F)	300	1200	2	CM150E3U(E3Y)-24E	150	1200	2
CM300DU-34K	300	1700	2	CM150E3Y-24NF	150	1200	2







MITSUBISHI IGBT

Parameters


Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
CM200E3U-24H	200	1200	2	CM800E2Z-66H	800	3300	2
CM200E3U(E3Y)-24E	200	1200	2	CM800E3UA-24F	800	1200	2
CM300E3U(E3Y)-24E	300	1200	2	CM800E6C-66H	800	3300	2
CM15TF-12H(12E)	15	600	6	CM75TF-12	75	600	6
CM20TF-12H(12E)	20	600	6	CM75TF-12H(12E)	75	600	6
CM25TF-10	25	500	6	CM75TU-12H(12E/12F)	75	600	6
CM25TF-12H(12F)	25	600	6	CM100TF-12H(12E)	100	600	6
CM30TF-12H(12E)	30	600	6	CM100TU-12H(12E/12F)	100	600	6
CM50TF-12	50	600	6	CM150TF-12H(12E)	150	600	6
CM50TF-12H(12E)	50	600	6	CM150TU-12H(12E/12F)	150	600	6
CM50TH-12E	50	600	6	CM200TU-12H(12F)	200	600	6
CM15TF-24H(24E/24F)	15	1200	6	CM75TF-28H	75	1400	6
CM20TF-24H(24E)	20	1200	6	CM75TJA-24FA	75	1200	6
CM25TF-20	25	1000	6	CM75TU-24H(24E/24F)	75	1200	6
CM25TF-24H	25	1200	6	CM75TU-28H	75	1400	6
CM30TF-24H(24E)	30	1200	6	CM75TU-34KA	75	1700	6
CM50TF-20	50	1000	6	CM100TF-24H(24E)	100	1200	6
CM50TF-24H(24E)	50	1200	6	CM100TF-28H	100	1400	6
CM50TF-28H	50	1400	6	CM100TJ-24F	100	1200	6
CM50TU-24H(24F)	50	1200	6	CM100TL-24NF	100	1200	6
CM50TU-28H	50	1400	6	CM100TU-24H(24E/24F)	100	1200	6
CM50TU-34KA	50	1700	6	CM100TU-28H	100	1400	6
CM75TF-24H(24E)	75	1200	6	CM150TL-24NF	150	1200	6
CM10LD-12H	10	600	6	CM150RL-12NFB	150	600	6
CM15LD-12H	15	600	6	CM200RL-12NF	200	600	6
CM15LDL-12H	15	600	6	CM200RL-12NFB	200	600	6
CM20LD-12H	20	600	6	CM10LD-24H	50	1200	6
CM20LDL-12H	20	600	6	CM50RL-24NF	50	1200	6
CM30AD38-12H	30	600	6	CM75RL-24NF	75	1200	6
CM30AD46-12H	30	600	6	CM75RX-24A	75	1200	6
CM30AD48-12H	30	600	6				
CM50AD12-12H	50	600	6				
CT30SM-12							







FUJI IGBT

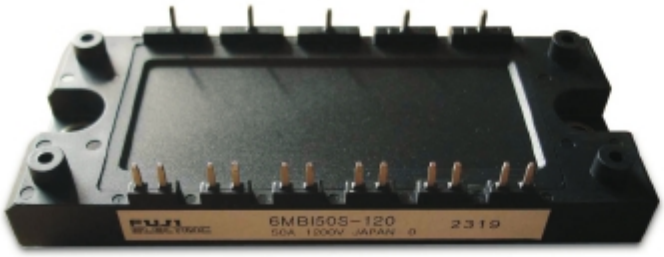

POWER TRANSISTOR MODULE
INSULATED TYPE


Features

- ●Compact package
- ●P.C.board mount
- ●Low VCE(sat)
- ●Low Saturation Voltage
- ●Voltage Drive
- ●Variety of Power Capacity Series


Application

- ●Inverter for motor drive
- ●AC and DC servo drive amplifier
- ●Uninterruptible power supply
- ●Industrial machines, such as welding machines

Schematic



1U



2U

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
1MBI30L-060	30	600	1	1MBI300N-060	300	600	1
1MBI50L-060	50	600	1	1MBI300JN-060	300	600	1
1MBI75FE-060	75	600	1	1MBI300JP-060	300	600	1
1MBI75L-060	75	600	1	1MBI400F-060	400	600	1
1MBI100L-060	100	600	1	1MBI400L-060	400	600	1
1MBI150NH-060	150	600	1	1MBI400N-060	400	600	1
1MBI150NK-060	150	600	1	1MBI600LN-060	600	600	1
1MBI200NH-060	200	600	1	1MBI600LP-060	600	600	1
1MBI200NK-060	200	600	1	1MBI600NN-060	600	600	1
1MBI300F-060	300	600	1	1MBI600NP-060	600	600	1
1MBI300L-060	300	600	1				
1MBI200-120	200	1200	1	1MBI400L-120	400	1200	1
1MBI200F-120	200	1200	1	1MBI400L-200	400	2000	1
1MBI200L-120	200	1200	1	1MBI400N-120	400	1200	1
1MBI200N-120	200	1200	1	1MBI400NN-120	400	1200	1
1MBI200S-120(120B)	200	1200	1	1MBI400NP-120	400	1200	1
1MBI200SA-120B	200	1200	1	1MBI400S-120(120B)	400	1200	1
1MBI300F-120	300	1200	1	1MBI400SN-120	400	1200	1
1MBI300JB-120	300	1200	1	1MBI400SP-120	400	1200	1
1MBI300JN-120(140)	300	1200(1400)	1	1MBI400SX-140	400	1400	1
1MBI300L-120	300	1200	1	1MBI600LN-120	600	1200	1
1MBI300NN-120	300	1200	1	1MBI600LP-120	600	1200	1
1MBI300NP-120	300	1200	1	1MBI600PX-120(140)	6006	1200(1400)	1
1MBI300S-120(120B)	300	1200	1	1MBI600S-120	00	1200	1
1MBI300SA-120(120B)	300	1200	1	1MBI800PN-180	800	1800	1
1MBI400JN-120(140)	400	1200(1400)	1	1MBI800U4B-120	800	1200	1

FUJI IGBT

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
2MBI30NR-060A	30	600	2	2MBI200N-060	200	600	2
2MBI50-060	50	600	2	2MBI200LB-060	200	600	2
2MBI50KB-060	50	600	2	2MBI200KB-060	200	600	2
2MBI50L-060	50	600	2	2MBI200NB-060	200	600	2
2MBI50F-060	50	600	2	2MBI200ND-060	200	600	2
2MBI50N-060	50	600	2	2MBI200NK-060	200	600	2
2MBI50LB-060	50	600	2	2MBI200SK-060	200	600	2
2MBI75-060	75	600	2	2MBI200TA-060	200	600	2
2MBI75J-060	75	600	2	2MBI200TC-060	200	600	2
2MBI75L-060	75	600	2	2MBI300J-060	300	600	2
2MBI75F-060	75	600	2	2MBI300K-060	300	600	2
2MBI75N-060	75	600	2	2MBI300L-060	300	600	2
2MBI75NB-060	75	600	2	2MBI300F-060	300	600	2
2MBI100-060	100	600	2	2MBI300N-060	300	600	2
2MBI100F-060	100	600	2	2MBI300LB-060	300	600	2
2MBI100J-060	100	600	2	2MBI300KB-060	300	600	2
2MBI100L-060	100	600	2	2MBI300NK-060	300	600	2
2MBI100N-060	100	600	2	2MBI300NB-060	300	600	2
2MBI100NB-060	100	600	2	2MBI300NR-060	300	600	2
2MBI120-060	120	600	2	2MBI300S-060	300	600	2
2MBI150-060	150	600	2	2MBI300SK-060	300	600	2
2MBI150F-060	150	600	2	2MBI300TA-060	300	600	2
2MBI150J-060	150	600	2	2MBI300TC-060	300	600	2
2MBI150KB-060	150	600	2	2MBI300U2B-060	300	600	2
2MBI150L-060	150	600	2	2MBI400K-060	400	600	2
2MBI150N-060	150	600	2	2MBI400KS-060	400	600	2
2MBI150LB-060	150	600	2	2MBI400L-060	400	600	2
2MBI150KB-060	150	600	2	2MBI400N-060	400	600	2
2MBI150NC-060	150	600	2	2MBI400NB-060	400	600	2
2MBI150ND-060	150	600	2	2MBI400NK-060	400	600	2
2MBI150NK-060	150	600	2	2MBI400NT-060	400	600	2
2MBI150NC-060	150	600	2	2MBI400SK-060	400	600	2
2MBI150SD-060	150	600	2	2MBI400TB-060	400	600	2
2MBI200F-060	200	600	2	2MBI400TC-060	400	600	2
2MBI200J-060	200	600	2	2MBI600NT-060	600	600	2
2MBI200K-060	200	600	2	2MBI600U2E-060	600	600	2
2MBI200L-060	200	600	2				
2MBI25-120	25	1200	2	2MBI100J-120(140)	100	1200(1400)	2
2MBI25F-120	25	1200	2	2MBI100L(F/N)-120	100	1200	2
2MBI25L-120	25	1200	2	2MBI100NB-120	100	1200	2
2MBI30NT-120	30	1200	2	2MBI100NC-120	100	1200	2
2MBI50-120	50	1200	2	2MBI100PC-140	100	1400	2
2MBI50F-120	50	1200	2	2MBI100SC-120	100	1200	2
2MBI50J-120(140)	50	1200(1400)	2	2MBI100U4A-120	100	1200	2
2MBI50L(N)-120	50	1200	2	2MBI100UA-120	100	1200	2
2MBI50N-120H	50	1200	2	2MBI150-120	150	1200	2
2MBI50P-140	50	1400	2	2MBI150F-120	150	1200	2
2MBI75F-120	75	1200	2	2MBI150J-120(140)	150	1200(1400)	2
2MBI75J-120(140)	75	1200(1400)	2	2MBI150L(N)-120	150	1200	2
2MBI75L(N)-120	75	1200	2	2MBI150NB-120	150	1200	2
2MBI75P-120(140)	75	1200(1400)	2	2MBI150NC-120	150	1200	2
2MBI75S-120	75	1200	2	2MBI150NT-120	150	1200	2
2MBI75SC-120	75	1200	2	2MBI150PC-140	150	1400	2
2MBI75UA-120	75	1200	2	2MBI150S-120	150	1200	2








FUJI IGBT

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
2MBI150SC-120	150	1200	2	2MBI200U4B-120	200	1200	2
2MBI150U4H-120	150	1200	2	2MBI200U4D-120	200	1200	2
2MBI150UA-120	150	1200	2	2MBI200U4H-120	200	1200	2
2MBI150UB-120	150	1200	2	2MBI200UB-120	200	1200	2
2MBI150UC-120	150	1200	2	2MBI200UC-120	200	1200	2
2MBI200BU-120	200	1200	2	2MBI200UD-120	200	1200	2
2MBI200J-120(140)	200	1200(1400)	2	2MBI200UR-120	200	1200	2
2MBI200L-120(120B)	200	1200	2	2MBI300L(N/S)-120	300	1200	2
2MBI200N-120	200	1200	2	2MBI300NT-120	300	1200	2
2MBI200NB-120	200	1200	2	2MBI300P-140	300	1400	2
2MBI200NE-120	200	1200	2	2MBI300UC-120	300	1200	2
2MBI200NT-120	200	1200	2	2MBI300UD-120	300	1200	2
2MBI200PB(TB)-140	200	1400	2	2MBI300UE-120	300	1200	2
2MBI200PB-120	200	1200	2	2MBI450U4E-120	450	1200	2
2MBI200S-120	200	1200	2	2MBI450UE-120	450	1200	2
2MBI200SB-120	200	1200	2	2MBI1200L-120	1200	1200	2
6MBI10GS-060	10	600	6	6MBI60FA-060	60	600	6
6MBI10L(F/N)-060	10	600	6	6MBI75-060	75	600	6
6MBI15-060	15	600	6	6MBI75FA-060	75	600	6
6MBI15GS-060	15	600	6	6MBI75L(F/N)-060	75	600	6
6MBI15L(F/N)-060	15	600	6	6MB100L-060ELX	100	600	6
6MBI15LS-060	15	600	6	6MBI100-060	100	600	6
6MBI20-060	20	600	6	6MBI100FA-060	100	600	6
6MBI20GS-060	20	600	6	6MBI100FB-060	100	600	6
6MBI20JB-060	20	600	6	6MBI100FC-060	100	600	6
6MBI20L(F/N)-060	20	600	6	6MBI100J-060(060B)	100	600	6
6MBI25GS-060	25	600	6	6MBI100L(F/N)-060	100	600	6
6MBI30FA-060	30	600	6	6MBI100NA-060(060A)	100	600	6
6MBI30L(F/N)-060	30	600	6	6MBI150FA-060	150	600	6
6MBI50-060	50	600	6	6MBI150FB-060	150	600	6
6MBI50FA-060(060S)	50	600	6	6MBI200FA-060	200	600	6
6MBI50JB-060	50	600	6	6MBI200FB-060	200	600	6
6MBI50L(F/N/J)-060	50	600	6	6MB50L-120ELX	50	600	6
6MBI8-120	8	1200	6	6MBI75L(F/N/J)-120	75	1200	6
6MBI8L(F/N)-120	8	1200	6	6MBI75S-120	75	1200	6
6MBI10L-120	10	1200	6	6MBI75U4B-120	75	1200	6
6MBI10S-120	10	1200	6	6MBI75UA-120	75	1200	6
6MBI15-120	15	1200	6	6MBI75UB-120	75	1200	6
6MBI15L(F/N)-120	15	1200	6	6MBI100S-120	100	1200	6
6MBI15S-120	15	1200	6	6MBI100UB-120	100	1200	6
6MBI25U-120(170)	25	1200(1700)	6	6MBI150U4S-120	150	1200	6
6MBI25J-120(120A)	25	1200	6	6MBI150UB-120	150	1200	6
6MBI25L(F/N)-120	25	1200	6	6MBI300U-120(170)	300	1200(1700)	6
6MBI25LB-120	25	1200	6	6MBI450U-120(170)	450	1200(1700)	6
6MBI25S-120	25	1200	6	6MBI450U4-120	450	1200	6
6MBI35S-120	35	1200	6	6R1MB100P-160-04	100	1600	6
6MBI50L(F/N/J)-120	50	1200	6	6R1MBI100LP-160-04	100	1600	6
6MBI50S120	50	1200	6	6R1MBI100P-160	100	1600	6
6MBI50S-120	50	1200	6	6R1MBI125LP-160	125	1600	6
6MBI50UA-120	50	1200	6	6R1MBI75P-160	75	1600	6





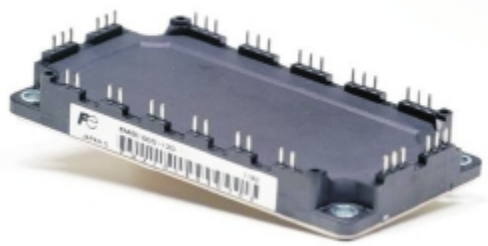

TOSHIBA IGBT



INSULATED GATE BIPOLAR TRANSISTOR

Features


- ●High input impedance
- ●Enhancement mode
- ●The electrodes are isolated from case
- ●Includes a complete half bridge card in one package

Application


- ●Chopper Applications.
- ●High power switching applications
- ●Motor control applications

Schematic

2U

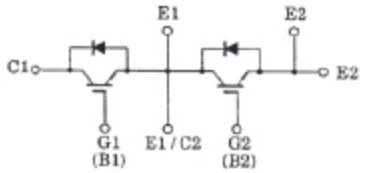

6U

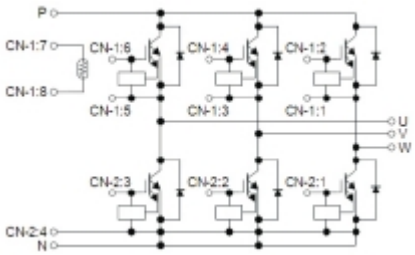

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
MG25H1BS1	25	600	1	MG200J1ZS50	200	600	1
MG25J1BS1(11)	25	600	1	MG300J1US1(51)	300	600	1
MG50H1BS1	50	600	1	MG300J1US11(21)	300	600	1
MG50J1BS1(11)	50	600	1	MG300J1US2(21)	300	600	1
MG50J1ZS40(50)	50	600	1	MG300J1US21(2C70)	300	600	1
MG75H1ZS1	75	600	1	MG300J1US51	300	600	1
MG75J1BS1(11)	75	600	1	MG400H1US1	400	600	1
MG75J1ZS40(50)	75	600	1	MG400J1US1(2)	400	600	1
MG100J1BS1(11)	100	600	1	MG400J1US11(21)	400	600	1
MG100H1BS1	100	600	1	MG400J1US41(42)	400	600	1
MG100J1ZS40(50)	100	600	1	MG400J1US45(46)	400	600	1
MG150J1BS1(11)	150	600	1	MG400J1US51	400	600	1
MG150J1JS50(51)	150	600	1	MG600J1US51	600	600	1
MG150J1ZS50(51)	150	600	1	MG800J1US51	800	600	1
				MG800J1US52(52A)	800	600	1
MG15N1BS1	15	1100	1	MG75Q1JS43	75	1200	1
MG15Q1BS11	15	1200	1	MG75Q1ZS50	75	1200	1
MG25Q1BS1(11)	20	1200	1	MG100Q1JS40(50)	100	1200	1
MG30V1BS41	30	1700	1	MG100Q1ZS40(43)	100	1200	1
MG50N1BS1	50	1100	1	MG100Q1ZS50	100	1200	1
MG50Q1BS1(11)	50	1200	1	MG200N1US41	200	1100	1
MG50Q1ZS50	50	1200	1	MG200Q1JS40	200	1200	1
MG50V1BS1	50	1700	1	MG200Q1US1	200	1200	1
MG75Q1BS1(11)	75	1200	1	MG200Q1US11(41)	200	1200	1
MG75Q1JS40(50)	75	1200	1	MG200Q1US51	200	1200	1

TOSHIBA IGBT

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
MG200N1US1	200	1100	1	MG400Q1US65H	400	1200	1
MG240V1US51	240	1700	1	MG400V1US51(51A)	400	1700	1
MG300N1US1	300	1100	1	MG400V1VS51	400	1700	1
MG300Q1US1(11)	300	1200	1	MG500Q1US1(2/11/21)	500	1200	1
MG300Q1US2(21)	300	1200	1	MG500Q1US51	500	1200	1
MG300Q1US41(42)	300	1200	1	MG600Q1US1(16)	600	1200	1
MG300Q1US51	300	1200	1	MG600Q1US41A	600	1200	1
MG360V1US42	360	1700	1	MG600Q1US50(51)	600	1200	1
MG400Q1US1(11)	400	1200	1	MG600Q1US59(59A)	600	1200	1
MG400Q1US2(21)	400	1200	1	MG600Q1US61	600	1200	1
MG400Q1US41(42)	400	1200	1	MG600Q1US65H	600	1200	1
MG400Q1US51	400	1200	1				
MG25H2CS1	25	600	2	MG150J2YS1(11)	150	600	2
MG25H2YS1	25	600	2	MG150J2YS2(21/45)	150	600	2
MG25J2YS9(91)	25	600	2	MG150J2YS40(41)	150	600	2
MG50H2YS1	50	600	2	MG150J2YS50	150	600	2
MG50J2YS1	50	600	2	MG200J2YS1(11)	200	600	2
MG50J2YS40(50)	50	600	2	MG200J2YS2(21/45)	200	600	2
MG50J2YS45	50	600	2	MG200J2YS40(42)	200	600	2
MG50J2YS9(91)	50	600	2	MG200J2YS50	200	600	2
MG75J2YS1	75	600	2	MG300J2YS1	300	600	2
MG75J2YS40(45)	75	600	2	MG300J2YS40(50)	300	600	2
MG75J2YS50	75	600	2	MG300J2YS9(91/45)	300	600	2
MG75J2YS9(91/45)	75	600	2	MG400J2YS40(50)	400	600	2
MG100G2YS1	100	450	2	MG400J2YS45	400	600	2
MG100H2YS1	100	600	2	MG400J2YS58	400	600	2
MG100H2ZS1	100	600	2	MG400J2YS60A	400	600	2
MG100J2DS45	100	600	2	MG400J2YS61A	400	600	2
MG100J2YS1	100	600	2	MG600J2YS59	600	600	2
MG100J2YS40(45/50)	100	600	2	MG600J2YS60A	600	600	2
MG100J2YS9(91/45)	100	600	2	MG600J2YS61A	600	600	2
MG150G2YS50	150	450	2				
MG15Q2YS9	15	1200	2	MG100Q2YS1(9/11/91)	100	1200	2
MG25N2YS1	25	1100	2	MG100Q2YS40(42)	100	1200	2
MG25N2YS40	25	1100	2	MG100Q2YS42EP	100	1200	2
MG25Q2YS40	25	1200	2	MG100Q2YS44	100	1200	2
MG25Q2YS40(EP)	25	1200	2	MG100Q2YS50(50A)	100	1200	2
MG25Q2YS9(91)	25	1200	2	MG100Q2YS51(51A)	100	1200	2
MG30V2YS40	30	1700	2	MG100Q2YS65H	100	1200	2
MG30V2YS40	30	1700	2	MG120V2YS40	120	1700	2
MG50N2YS1	50	1100	2	MG150N2YS40	150	1100	2
MG50Q2YS40(43)	50	1200	2	MG150Q1JS43(44)	150	1200	2
MG50Q2YS45	50	1200	2	MG150Q2S50	150	1200	2
MG50Q2YS50(50A)	50	1200	2	MG150Q2YS1(9/11/91)	150	1200	2
MG50Q2YS9(91)	50	1200	2	MG150Q2YS40(50)	150	1200	2
MG75N2YS40	75	1100	2	MG150Q2YS51	150	1200	2
MG75Q2YS1(11)	75	1200	2	MG180V2YS40	180	1700	2
MG75Q2YS2	75	1200	2	MG200N2YS40	200	1100	2
MG75Q2YS40(42)	75	1200	2	MG200Q2YS1(9/11/91)	200	1200	2
MG75Q2YS43(50)	75	1200	2	MG200Q2YS40(50)	200	1200	2
MG75Q2YS44	75	1200	2	MG200Q2YS40EP	200	1200	2
MG75Q2YS50HU	75	1200	2	MG200Q2YS45	200	1200	2
MG75Q2YS51(52)	75	1200	2	MG200Q2YS65H	200	1200	2
MG75Q2YSK1	75	1200	2	MG300Q2YS40(50)	300	1200	2
MG90V2YS40	90	1700	2	MG300Q2YS43	300	1200	2
MG100N2YS1	100	1100	2	MG300Q2YS60A	300	1200	2








TOSHIBA IGBT

Parameters


Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
MG300Q2YS61(61H)	300	1200	2	MG400V2YS40	400	1700	2
MG300Q2YS65H	300	1200	2	MG400V2YS60(60A)	400	1700	2
MG400Q2YS60(60A)	400	1200	2	MG600Q2YS60(60A)	600	11200	2
MG8J6ES1	8	600	6	MG50J6ES9(91)(45)	50	600	6
MG15J6ES1	15	600	6	MG75J6ES1(11/45)	75	600	6
MG15J6ES40	15	600	6	MG75J6ES40	75	600	6
MG25J6ES1	25	600	6	MG75J6ES50	75	600	6
MG25J6ES40	25	600	6	MG75J6ES51	75	600	6
MG25J6ES42	25	600	6	MG75J6ES53	75	600	6
MG30J6ES1(11)	30	600	6	MG100J6ES1(11)	100	600	6
MG30J6ES40(50)	30	600	6	MG100J6ES40(50)	100	600	6
MG50J6ES1(11)	50	600	6	MG100J6ES52	100	600	6
MG50J6ES40(50)	50	600	6	MG100J6ES53	100	600	6
MG50J6ES51	50	600	6	MG100J6ES91(45)	100	600	6
MG50J6ES53	50	600	6	MG200J6ES60	200	600	6
MG8N6ES45	8	1100	6	MG25N6ES42	25	1100	6
MG8Q6ES1	8	1200	6	MG25N6ES45	25	1100	6
MG8Q6ES40(42)	8	1200	6	MG25Q6ES1	25	1200	6
MG10Q6ES50(50A)	10	1200	6	MG25Q6ES40(42)	25	1200	6
MG10Q6ES51(51A)	10	1200	6	MG25Q6ES43	25	1200	6
MG15N6ES1	15	1100	6	MG25Q6ES50(50A)	25	1200	6
MG15N6ES40	15	1100	6	MG25Q6ES51(51A)	25	1200	6
MG15N6ES42	15	1100	6	MG50Q6ES1(11)	50	1200	6
MG15N6ES45	15	1100	6	MG50Q6ES40(41)	50	1200	6
MG15Q6ES1	15	1200	6	MG50Q6ES50(50A)	50	1200	6
MG15Q6ES40(42)	15	1200	6	MG50Q6ES51(51A)	50	1200	6
MG15Q6ES50(50A)	15	1200	6	MG75Q6ES11	75	1200	6
MG15Q6ES51(51A)	15	1200	6	MG75Q6ES40	75	1200	6
MP6750	15	600	6	MG50J7CSAOA	50	600	6
MP6751	15	600	6	MG150J7KS50(60)	100	600	6
MP6752	20	600	6	MG100J7KS50	150	600	6
MP6753	20	600	6	MG75Q7CSAOX	75	1200	7
MP6754	10	600	6	MG75Q7KS50	75	200	7
Mp6757	25	600	6				
MP6759	10	600	6				





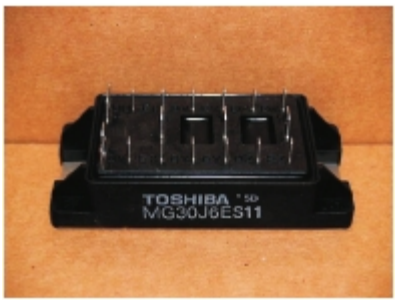

Infineon(EUPEC/ SIEMENS) IGBT

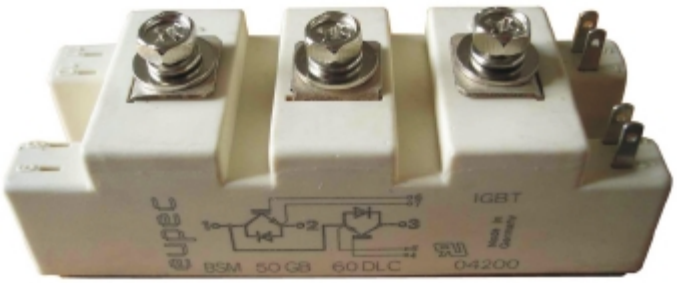

IGBT Power Module

Features


- ●Power module
- ●3-phase full-bridge
- ●Including fast free-wheel diodes
- ●Package with insulated metal base plate
- ●E3226: long terminals, limited current per terminal

Application


- ●Inverter for motor drive
- ●AC and DC servo drive amplifier
- ●Uninterruptible power supply
- ●Industrial machines, such as welding machines

Schematic

1U



6U

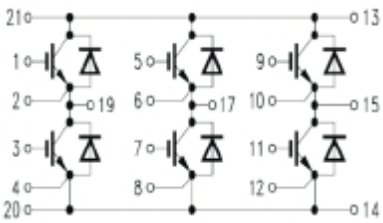

Parameters


Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
BSM200GA120DN11	200	1200	1	BSM300GA120DN2SE3256	300	1200	1
BSM200GA120DN2(DLC)	200	1200	1	BSM300GA170DLS	300	1700	1
BSM200GA170DN2(DLC)	200	1700	1	BSM300GA170DN2(DLC)	300	1700	1
BSM300GA100D	300	100	1	BSM400GA120DL	400	1200	1
BSM300GA120D	300	1200	1	BSM400GA120DN2(DLC)	400	1200	1
BSM300GA120DN11	300	1200	1	BSM400GA120DN2FS	400	1200	1
BSM300GA120DN11S	300	1200	1	BSM400GA120DN2FSE3256	400	1200	1
BSM300GA120DN2(DLC)	300	1200	1	BSM400GA120DN2SE3256	400	1200	1
BSM300GA120DN2FS	300	1200	1	BSM400GA170DN2(DLC)	400	1700	1
BSM300GA120DN2S	300	1200	1	BSM500GA120DN2	500	1200	1
BSM50GB60DLC	50	600	2	BSM200GB60DLC	200	600	2
BSM75GB60DLC	75	600	2	BSM300GB60DLC	300	600	2
BSM100GB60DLC	100	600	2	BSM400GB60DN2	400	600	2
BSM150GB60DLC	150	600	2				
BSM25GAL120D	25	1200	2	BSM50GB170DN2	50	1700	2
BSM25GAL120DN2	25	1200	2	BSM75GAL120D	75	1200	2
BSM25GB100D	25	1000	2	BSM75GAL120DN2	75	1200	2
BSM25GB100DN1	25	1000	2	BSM75GAR120DN2	75	1200	2
BSM25GB120D	25	1200	2	BSM75GB120DN1	75	1200	2
BSM25GB120DN2	25	1200	2	BSM75GB120DN2(DLC)	75	1200	2
BSM35GB120DN2(DLC)	35	1200	2	BSM75GB120DN2E3223	75	1200	2
BSM50GAL120DN2	50	1200	2	BSM75GB170DN2	75	1700	2
BSM50GB100D	50	1000	2	BSM100GAL120D	100	1200	2
BSM50GB120D	50	1200	2	BSM100GAL120DN2	100	1200	2
BSM50GB120DN1	50	1200	2	BSM100GAL120DN2K(DLCK)	100	1200	2
BSM50GB120DN2(DLC)	50	1200	2	BSM100GAR120D	100	1200	2


SIEMENS IGBT

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
BSM100GAR120DN2	100	1200	2	BSM150GB100D	150	1000	2
BSM100GB100D	100	1000	2	BSM150GB100D11	150	1000	2
BSM100GB120DN1	100	1200	2	BSM150GB100DN2	150	1000	2
BSM100GB120DN11	100	1200	2	BSM150GB120DN2(DLC)	150	1200	2
BSM100GB120DN2(DLC)	100	1200	2	BSM150GB170DN2(DLC)	150	1700	2
BSM100GB120DN2E	100	1200	2	BSM200GAL120D	200	1200	2
BSM100GB120DN2FE3256	100	1200	2	BSM200GAL120DN2(DLC)	200	1200	2
BSM100GB120DN2K(DLCK)	100	1200	2	BSM200GAR120DN2	200	1200	2
BSM100GB120DN2KG	100	1200	2	BSM200GB120DN2(DLC)	200	1200	2
BSM100GB170DN2(DLC)	100	1700	2	BSM200GB170DN2(DLC)	200	1700	2
BSM150GAL120D	150	1200	2	BSM300GAL120DN2(DLC)	300	1200	2
BSM150GAL120DN2(DLC)	150	1200	2	BSM300GAR120DLC	300	1200	2
BSM150GAR120D	150	1200	2	BSM300GB120DN2(DLC)	300	1200	2
BSM150GAR120DN2	150	1200	2	BSM300GB170DN2	300	1700	2
BSM100GT120DN2	100	1200	3	BSM30GD60DN2(DLC)	30	600	6
BSM100GT170DL	100	1700	3	BSM50GD60DN2(DLC)	50	600	6
BSM150GT120DN2	150	1200	3	BSM75GD60DLC	75	600	6
BSM150GT170DL	150	1700	3	BSM100GD60DLC	100	600	6
BSM200GT120DN2	200	1200	3	BSM150GD60DLC	150	600	6
BSM10GD60DN2(DLC)	10	600	6	BSM200GD60DLC	200	600	6
BSM15GD60DN2(DLC)	15	600	6				
BSM20GD60DN1(DN2)	20	600	6				
BSM25GD60DLC	25	600	6				
BSM10GD100D	10	1000	6	BSM35GD120DN2(DLC)	35	1200	6
BSM10GD100DN1(DN2)	10	1000	6	BSM35GD120DN2E3223	35	1200	6
BSM10GD120DN2E3224	10	1200	6	BSM35GD120DN2E3224	35	1200	6
BSM15GD100D	15	1000	6	BSM50GD120DLC	50	1200	6
BSM15GD120D	15	1200	6	BSM50GD120DN1	50	1200	6
BSM15GD120DN1(DN2)	15	1200	6	BSM50GD120DN2(DLC)	50	1200	6
BSM15GD120DN2E3224	15	1200	6	BSM50GD120DN2-B10	50	1200	6
BSM15GD120DN2E3226	15	1200	6	BSM50GD120DN2E3226	50	1200	6
BSM25GD100DN2	25	1000	6	BSM50GD120DN2G	50	1200	6
BSM25GD120DN2	25	1200	6	BSM50GD170DLC	50	1700	6
BSM25GD120DLCE3224	25	1200	6	BSM75GD120DN2(DLC)	75	1200	6
BSM25GD120DN1(DN2)	25	1200	6	BSM75GD120DN2E	75	1200	6
BSM25GD120DN2E3224	25	1200	6	BSM100GD120DN2(DLC)	100	1200	6
BSM25GD123D	25	1200	6				
BSM35GD120	35	1200	6				
BSM10GP60	10	600	7				
BSM15GP60	15	600	7				
BSM20GP60	20	600	7	BSM35GP60	35	600	7
BSM20GP60-B2	20	600	7	BSM50GP60	50	600	7
BSM30GP60	30	600	7	BSM50GP60-B2	50	600	7
BSM30GP60-B2	30	600	7	BSM50GP60G	50	600	7
BSM10GP120	10	1200	7	BSM75GP60	75	600	7
BSM15GP120	15	1200	7	BSM100GP60	100	600	7
BSM15GP120-B2	15	1200	7	BSM35GP120	35	1200	7
BSM20GP100	20	1000	7	BSM35GP120G	35	1200	7
BSM25GP120	25	1200	7	BSM50GP120	50	1200	7
BSM25GP120-B2	25	1200	7				



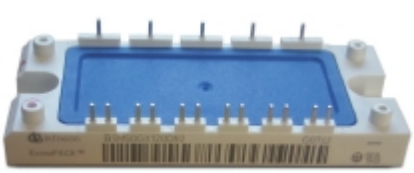

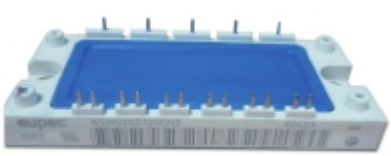

SEMIKRON IGBT



SEMIKRON® M IGBT Modules

Features


- MOS input (voltage controlled)
- N channel, Homogeneous Si
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability
- Latch-up free
- Fast&soft inverse CAL diodes
- Isolated copper baseplate using DCB Direct Copper Bonding Technology

Application


- Three phase inverter drives
- Switching(not for linear use)
- Switched mode power supplies
- Three phase inverters for AC moto speed control
- UPS

Schematic

6U

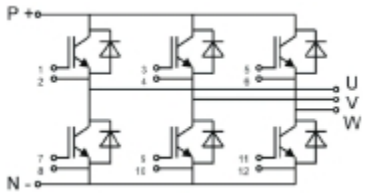

7U

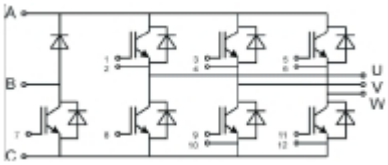

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
SKM50GA121D	50	1200	1	SKM400GA122D	400	1200	2
SKM52GA123D	52	1200	1	SKM400GA123(124)D	400	1200	2
SKM75GA123D	75	1200	1	SKM400GA128D	400	1200	2
SKM100GA121D	100	1200	1	SKM400GA170D	400	1700	2
SKM150GA123D	150	1200	1	SKM400GA173D	400	1700	2
SKM200GA121D	200	1200	1	SKM500GA123(124)D	500	1200	2
SKM200GA123D	200	1200	1	SKM500GA124DE	500	1200	2
SKM300GA102D	300	1000	1	SKM500GA124DH6	500	1200	2
SKM300GA121D	300	1200	1	SKM500GA128D	500	1200	2
SKM300GA123D	300	1200	1	SKM500GA173(174)D	500	1700	2
SKM300GA173D	300	1700	1	SKM600GA124D	600	1200	2
SKM400GA123D	400	1000	1				
SKM200GB063D	200	600	2	SKM75GB123(124)D	75	1200	2
SKM25GB100D	25	1000	2	SKM75GB124DE	75	1200	2
SKM40GB101D	40	1000	2	SKM75GB128D	75	1200	2
SKM40GB123D	40	1200	2	SKM75GB128DE	75	1200	2
SKM50GAL100D	50	1000	2	SKM75GB173D	75	1700	2
SKM50GAL123D	50	1200	2	SKM75GB173DH6	75	1700	2
SKM50GAR123D	50	1200	2	SKM100GAL121D	100	1200	2
SKM50GB123D	50	1200	2	SKM100GAL123D	100	1200	2
SKM75GAL123D	75	1200	2	SKM100GAL173D	100	1200	2
SKM75GAR101D	75	1000	2	SKM100GAR121D	100	1200	2
SKM75GAR123D	75	1200	2	SKM100GAR123D	100	1200	2
SKM75GB100D	75	1000	2	SKM100GB101D	100	1000	2
SKM75GB101D	75	1000	2				
SKM75GB121D	75	1200	2				

SEMIKRON IGBT

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
SKM100GB121D	100	1200	2	SKM195GB063DN	195	600	2
SKM100GB123(124)D	100	1200	2	SKM195GB123D	195	1200	2
SKM100GB128D	100	1200	2	SKM195GB124DN	195	1200	2
SKM100GB128DN	100	1200	2	SKM195GB126D	195	1200	2
SKM100GB173D	100	1700	2	SKM195GB126DN	195	1200	2
SKM145GAL123D	145	1200	2	SKM200GAL122D	200	1200	2
SKM145GAL124DN	145	1200	2	SKM200GAL123(125)D	200	1200	2
SKM145GAL128DN	145	1200	2	SKM200GAL123DKL100	200	1200	2
SKM145GAL174DN	145	1700	2	SKM200GAL173D	200	1700	2
SKM145GAR123D	145	1200	2	SKM200GAR122D	200	1200	2
SKM145GAR124DN	145	1200	2	SKM200GAR123(125)D	200	1200	2
SKM145GAR128D	145	1200	2	SKM200GAR173D	200	1700	2
SKM145GB123(124)D	145	1200	2	SKM200GB123(124)D	200	1200	2
SKM145GB124DN	145	1200	2	SKM200GB128D	200	1200	2
SKM145GB128D	145	1200	2	SKM200GB128DE	200	1200	2
SKM145GB128DE	145	1200	2	SKM200GB173(174)D	200	1700	2
SKM145GB128DM1	145	1200	2	SKM300GAL063D	300	600	2
SKM145GB128DN	145	1200	2	SKM300GAL123D	300	1200	2
SKM145GB174DN	145	1700	2	SKM300GAL128D	300	1200	2
SKM150GAL123D	150	1200	2	SKM300GAR123D	300	1200	2
SKM150GAR123D	150	1200	2	SKM300GB123(124)D	300	1200	2
SKM150GB122D	150	1200	2	SKM300GB124DH4E	300	1200	2
SKM150GB123(124)D	150	1200	2	SKM300GB128D	300	1200	2
SKM150GB123DM5	150	1200	2	SKM300GB174D	300	1700	2
SKM150GB124D	150	1200	2	SKM400GAL124(125)D	400	1200	2
SKM150GB128D	150	1200	2	SKM400GAR124(125)D	400	1200	2
SKM150GB128DE	150	1200	2	SKM400GB123(124)D	400	1200	2
SKM150GB173D	150	1700	2	SKM400GB123DL7	400	1200	2
SKM195GAL123D	195	1200	2	SKM400GB126D	400	1200	2
SKM195GAL124DN	195	1200	2	SKM400GB128D	400	1200	2
SKM195GAR123D	195	1200	2	SKM400GB128DH6	400	1200	2
SKM195GAR124DN	195	1200	2	SKM400GB176D	400	1700	2
SKM15GD100D	15	1000	6	SKM40GD123(124)D	40	1200	6
SKM22GD100D	22	1000	6	SKM40GD124DH8	40	1200	6
SKM22GD101D	22	1000	6	SKM75GD123(124)D	75	1200	6
SKM22GD121D	22	1200	6	SKM75GD123DL	75	1200	6
SKM22GD123D	22	1200	6	SKM100GD123D	100	1200	6
SKM25GD100D	25	1000	6	SKM40GDL123D	40	1200	6
SKM40GD101D	40	1000	6	SKM50GDL062D	50	600	6
SKM40GD121D	40	1200	6	SKM50GDL063DL	50	600	6
SKM40GD121L1	40	1200	6	SKM75GDL123D	70	1200	6
SKiM406GD066HD	400	600	6	SKiM306GD12E4	300	1200	6
SKiM606GD066HD	600	600	6	SKiM459GD12E4	450	1200	6
SKiM909GD066HD	900	600	6				
SKiM300GD126D	300	1200	6	SKiM429GD17E4HD	420	1700	6
SKiM400GD126DM	300	1200	6	SKiM120GD176D	125	1700	6
SKiM450GD126D	450	1200	6	SKiM220GD176DH4	250	1700	6
SKiM601GD126DM	450	1200	6	SKiM270GD176D	300	1700	6







HITACHI IGBT



Silicon N-channel IGBT


Features

- ●High speed and low saturation voltage.
- ●High reliability, high durability module.
- ●Low noise due to built-in free-wheeling diode-ultra soft fast recovery diode(USFD).
- ●Isolated head sink (terminal to base).
- ●High thermal fatigue durability (delta Tc=70°C,N>20,000cycles)

Application

- ●Inverter for motor drive
- ●AC and DC servo drive amplifier
- ●Uninterruptible power supply
- ●Industrial machines, such as welding machines

Schematic



MBN

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
MBN100GP6HW	100	600	1	MBN400GS12AW(BW)	400	1200	1
MBN200GS6AW	200	600	1	MBN400NS12AW(BW)	400	1200	1
MBN300GS6AW	300	600	1	MBN500C20	500	2000	1
MBN400GS6AW	400	600	1	MBN600C20	600	2000	1
MBN600HS6NAW	600	600	1	MBN600D33	600	3300	1
MBN600HS6PAW	600	600	1	MBN600GS12AW	600	1200	1
MBN200GS12AW	200	1200	1	MBN600NS12AW	600	1200	1
MBN300F12	300	1200	1	MBN800GS12AW(BW)	800	1200	1
MBN300GS12A	300	1200	1	MBN1000QS12AW(BW)	1000	1200	1
MBN300GS12AW(BW)	300	1200	1	MBN1200D25AW(B)	1200	2500	1
MBN325A20	325	2000	1	MBN1200D33AW	1200	3300	1
MBN325C20	325	2000	1	MBN1200GS12AW	1200	1200	1
MBN400C20	400	2000	1	MBN1200NS12AW	1200	1200	1
MBN400D33	400	3300	1	MBN1800D17	1800	1700	1
MBN400GS12A(B)	400	1200	1				
MBM50A6	50	600	2	MBM200GS6AW	200	600	2
MBM50AS6	50	600	2	MBM200HR6G	200	600	2
MBM75A6	75	600	2	MBM200HR6HY	200	600	2
MBM75AS6	75	600	2	MBM200HS6A(G)	200	600	2
MBM100A6	100	600	2	MBM200HS6H	200	600	2
MBM100AS6	100	600	2	MBM300A6	300	600	2
MBM150A6	150	600	2	MBM300BS6	300	600	2
MBM150BS6	150	600	2	MBM300GR6	300	600	2
MBM150GS6AW	150	600	2	MBM300GS6A	300	600	2
MBM200A6	200	600	2	MBM300GS6AW	300	600	2
MBM200GS6A	200	600	2	MBM300HR6G	300	600	2

HITACHI IGBT

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
MBM300HR6HY	300	600	2	MBM400H6	400	600	2
MBM300HS6A	300	600	2	MBM400HR6G	400	600	2
MBM300HS6B(H)	300	600	2	MBM400HS6	400	600	2
MBM300HS6G	300	600	2	MBM400HS6A(G)	400	600	2
MBM400CS6AW	400	600	2	MBM400JS6AW	400	600	2
MBM400GS6A	400	600	2	MBM400KS6AW	400	600	2
MBM400GS6AW	400	600	2	MBM600GS6AW(CW)	600	600	2
MBM50F12	50	1200	2	MBM200GS12AW(EBW)	200	1200	2
MBM75F12	75	1200	2	MBM200HS12A	200	1200	2
MBM75GS12A	75	1200	2	MBM200HT12	200	1200	2
MBM75GS12AW	75	1200	2	MBM200HT12H	200	1200	2
MBM100GS12A	100	1200	2	MBM200JS12A	200	1200	2
MBM100GS12AW	100	1200	2	MBM200JS12AW(EW)	200	1200	2
MBM100HS12A	100	1200	2	MBM300GR12	300	1200	2
MBM150GR12	150	1200	2	MBM300GR12B2	300	1200	2
MBM150GS12	150	1200	2	MBM300GS(NS)12AW	300	1200	2
MBM150GS12A	150	1200	2	MBM300GS12	300	1200	2
MBM150GS12AW(EBW)	150	1200	2	MBM300GS12A	300	1200	2
MBM150HS12A	150	1200	2	MBM300HT12	300	1200	2
MBM150HT12	150	1200	2	MBM400QR12AW	400	1200	2
MBM150HT12H	150	1200	2	MBM400QS12AW	400	1200	2
MBM200GR12	200	1200	2	MBM600QS12AW	600	1200	2
MBM200GS12A	200	1200	2				









SanKen IGBT



POWER TRANSISTOR MODULE
INSULATED TYPE


Features

- ●Compact package
- ●P.C.board mount
- ●Low VCE(sat)
- ●Low Saturation Voltage
- ●Voltage Drive
- ●Variety of Power Capacity Series

Application

- ●Inverter for motor drive
- ●AC and DC servo drive amplifier
- ●Uninterruptible power supply
- ●Industrial machines, such as welding machines

Schematic



Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
SG16AA20(40/60)	16	200(400600)	1	SG200Z2	200	1200	2
				SG300Z2	300	1200	2
SG50Z2	50	1200	2	SG200Z1H	200	1200	2
SG75Z2	75	1200	2	SG300Z1H	300	1200	2
SG100Z2	100	1200	2	SG400Z1H	400	1200	2
SG150Z2	150	1200	2	SG600Z1H	600	1200	2

MITSUBISHI IPM&PIM



FLAT-BASE TYPE
INSULATED PACKAGE

Features


- ●Complete Output Power Circuit
- ●Gate Drive Circuit
- ●Protection Logic
- —Short Circuit
- —Over Current
- —Over Temperature
- —Under Voltage

Application


- ●Inverters
- ●UPS
- ●Motion/Servo Control
- ●Power Supplies

Schematic

2U



6U

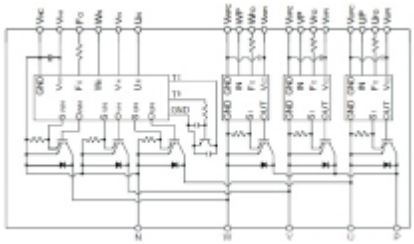

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
PM300HHA060(120)	300	600(1200)	1	PM300HSA120	300	1200	1
PM600HHA060	600	600	1	PM600HVA120	600	1200	1
PM800HSA060	800	600	1	PM800HSA120	800	1200	1
PM200DSA120	200	1200	2	PM900HSA120	900	1200	1
PM300DSA120	300	1200	2	PM400HSA120	400	1200	1
				PM600HSA120	600	1200	1
PM100DHA060	100	600	2	PM400DVA060	400	600	2
PM100DKA060	100	600	2	PM600DSA060	600	600	2
PM100DSA060	100	600	2	PM600DVA060	600	600	2
PM150DHA060	150	600	2	PM75DHA120	75	1200	2
PM150DKA060	150	600	2	PM100DHA120	100	1200	2
PM200DHA060	200	600	2	PM150DHA120	150	1200	2
PM200DKA060	200	600	2	PM150DSA120	150	1200	2
PM200DSA060	200	600	2	PM200DHA120	200	1200	2
PM300DHA060	300	600	2	PM200DVA120	200	1200	2
PM300DSA060	300	600	2	PM300DSA120	300	1200	2
PM400DHA060	400	600	2	PM300DVA120	300	1200	2
PM400DSA060	400	600	2				
PM5CTM060	5	600	6	PM15CMA060	15	600	6
PM10CMA060	10	600	6	PM15CNA060	15	600	6
PM10CNA060	10	600	6	PM15CTM060	15	600	6
PM10CNJ060	10	600	6	PM20CEA060	20	600	6
PM15CEA060	15	600	6	PM20CEE060	20	600	6
PM15CEB060	15	600	6	PM20CEF060	20	600	6
PM15CEE060	15	600	6	PM20CFE060	20	600	6
PM15CEE060	15	600	6	PM20CHA060	20	600	6
PM15CEG060	15	600	6	PM20CNA060	20	600	6

MITSUBISHI IPM&PIM Modules

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
PM20CNJ060	20	600	6	PM100CES060	100	600	6
PM20CTM060	20	600	6	PM100CFE060	100	600	6
PM20CVA060	20	600	6	PM100CHS060	100	600	6
PM20CVL060	20	600	6	PM100CLA060	100	600	6
PM30CEF060	30	600	6	PM100CSD060	100	600	6
PM30CFE060	30	600	6	PM100CSE060	100	600	6
PM30CHA060	30	600	6	PM100CVA060	100	600	6
PM30CMA060	30	600	6	PM150CBS060	150	600	6
PM30CNA060	30	600	6	PM150CSD060	150	600	6
PM30CNJ060	30	600	6	PM150CSE060	150	600	6
PM30CTJ060	30	600	6	PM150CVA060	150	600	6
PM50CHA060	50	600	6	PM175CFE060	175	600	6
PM50CLA060	50	600	6	PM200CBS060	200	600	6
PM50CRB060	50	600	6	PM200CGA060	200	600	6
PM50CSD060	50	600	6	PM200CSA060	200	600	6
PM50CSE060	50	600	6	PM200CSD060	200	600	6
PM50CTJ060	50	600	6	PM200CSE060	200	600	6
PM75CBS060	75	600	6	PM200CVA060	200	600	6
PM75CEA060	75	600	6	PM200CVB060	300	600	6
PM75CEF060	75	600	6	PM300CSA060	300	600	6
PM75CFE060	75	600	6	PM300CSD060	300	600	6
PM75CHA060	75	600	6	PM300CSE060	300	600	6
PM75CLA060	75	600	6	PM300CVA060	300	600	6
PM75CSD060	75	600	6	PM600CGA060	600	600	6
PM75CSE060	75	600	6	PM600CNB060	600	600	6
PM75CVA060	75	600	6	PM600CVB060	600	600	6
PM100CBS060	100	600	6				
PM10CZF120	10	1200	6	PM75CSE120	75	1200	6
PM15CKF120	15	1200	6	PM75CVA120	75	1200	6
PM15CKT120	15	1200	6	PM100CBS120	100	1200	6
PM15CZF120	15	1200	6	PM100CSA120	100	1200	6
PM25CLA120	25	1200	6	PM100CSD120	100	1200	6
PM25CLB120	25	1200	6	PM100CSE120	100	1200	6
PM50CLA120	50	1200	6	PM100CVA120	100	1200	6
PM50CSA120	50	1200	6	PM150CSD120	150	1200	6
PM50CSD120	50	1200	6	PM150CSE120	150	1200	6
PM50CSE120	50	1200	6	PM150CVA120	150	1200	6
PM50CVA120	50	1200	6	PM200CLA120	200	1200	6
PM75CLA120	75	1200	6	PM300CLA120	300	1200	6
PM75CSA120	75	1200	6				
PM75CSD120	75	1200	6				
PM15RSF060	15	600	7	PM75RHA060	75	600	7
PM30RHC060	30	600	7	PM75RLA060	75	600	7
PM30RMC060	30	600	7	PM75RRA060	75	600	7
PM30RNC060	30	600	7	PM75RSA060	75	600	7
PM30RSF060	30	600	7	PM75RSD060	75	600	7
PM30RSF060S	30	600	7	PM75RSE060	75	600	7
PM50RBS060	50	600	7	PM75RSK060	75	600	7
PM50RHA060	50	600	7	PM75RVA060	75	600	7
PM50RHB060	50	600	7	PM100RLA060	100	600	7
PM50RLA060	50	600	7	PM100RLB060	100	600	7
PM50RRA060	50	600	7	PM100RRS060	100	600	7
PM50RSA060	50	600	7	PM100RSA060	100	600	7
PM50RSD060	50	600	7	PM100RSD060	100	600	7
PM50RSK060	50	600	7	PM100RSE060	100	600	7
PM75RFE060	75	600	7				







MITSUBISHI IPM&PIM Modules

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
PM150RL1A060	150	600	7	PM200RSA060	200	600	7
PM150RLA060	150	600	7	PM200RSD060	200	600	7
PM150RRA060	150	600	7	PM200RSE060	200	600	7
PM150RSA060	150	600	7	PM300RSD060	300	600	7
PM150RSD060	150	600	7	PM300RSE060	300	600	7
PM150RSE060	150	600	7	PM600RRA060	600	600	7
PM200RLA060	200	600	7				
PM10RHB120	10	1200	7	PM50RSD120	50	1200	7
PM10RSH120	10	1200	7	PM50RSE120	50	1200	7
PM10RSH120	10	1200	7	PM50RVA120	50	1200	7
PM15RHB120	15	1200	7	PM75RHA120	75	1200	7
PM15RSH120	15	1200	7	PM75RLA120	75	1200	7
PM25RHB120	25	1200	7	PM75RSD120	75	1200	7
PM25RKK120	25	1200	7	PM75RSE120	75	1200	7
PM25RLA120	25	1200	7	PM75RVA120	75	1200	7
PM25RSB120	25	1200	7	PM100RLA120	100	1200	7
PM25RSH120	25	1200	7	PM100RSD120	100	1200	7
PM25RSK120	25	1200	7	PM100RSE120	100	1200	7
PM50RHA120	50	1200	7	PM150RLA120	150	1200	7
PM50RLA120	50	1200	7	PM150RSD120	150	1200	7
PM50RNE120	50	1200	7	PM150RSE120	150	1200	7
PM50RSA120	50	1200	7	PM200RLA120	200	1200	7
MITSUBISHI PIM MODULES							
CM10MD1-12H	10	1200	6	CM30MD3-12H	30	600	6
CM10MD3-12H	10	600	6	CM50MD1-12H	50	600	6
CM15MD1-12H	15	600	6	CM10MD1-24H	10	1200	6
CM15MD3-12H	15	600	6	CM10MD1L-24H	10	1200	6
CM20MD1-12H	20	600	6	CM15MD1-24H	15	1200	6
CM20MD3-12H	20	600	6	CM25MD1-24H	20	1200	6
CM30MD1-12H	30	600	6				
CM10MC-12H	10	600	6	CM50MD-12H(12KH)	50	600	6
CM10MD(MDL)-12H	10	600	6	CM10MD(MDL)-24H	10	1200	6
CM15MD(MDL)-12H	15	600	6	CM10MD-24	10	1200	6
CM20MD(MDL)-12H	20	600	6	CM15MD(MDL)-24H	15	1200	6
CM30MD-12H	30	600	6	CM25MD(MDL)-24H	20	1200	6





FUJI IPM&PIM Modules



IGBT-IPM R series


Features

- ●Low power loss and soft switching
- ●Converter Diode Bridge Dynamic Brake Circuit
- ●Compatible with existing IPM-N series packages
- ●High performance and high reliability IGBT with overheating Protection
- ●Higher reliability because of a big decrease in number of parts in built-in control circuit
- ●Temperature protection provided by directly detecting the junction temperature of the IGBTs

Applications

- ●Inverter for motor drive
- ●AC and DC servo drive amplifier
- ●UPS (Uninterruptible power supply)

Schematic

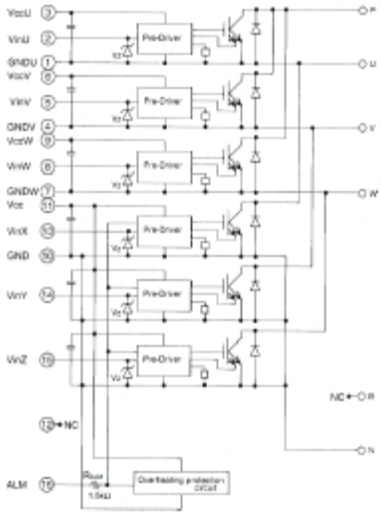

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
6MBP10-060	10	600	6	6MBP75JA(JB)-060	75	600	6
6MBP15JB-060	15	600	6	6MBP75NA-060	75	600	6
6MBP15RH-060	15	600	6	6MBP75RA-060	75	600	6
6MBP15RY-060	15	600	6	6MBP75RH-060	75	600	6
6MBP15RZ-060	15	600	6	6MBP75RS-060	75	600	6
6MPB20RZ-060	20	600	6	6MBP80RTA-060	80	600	6
6MBP20JB-060	20	600	6	6MBP100JA(JB)-060	100	600	6
6MBP20RH-060	20	600	6	6MBP100KB-060	100	600	6
6MBP20RTA-060	20	600	6	6MBP100KC-060	100	600	6
6MBP20RY-060	20	600	6	6MBP100NA-060	100	600	6
6MBR30SA-060	30	600	6	6MBP100RA-060	100	600	6
6MBP30RH-060	30	600	6	6MBP100RD-060	100	600	6
6MBP30RTB-060	30	600	6	6MBP100RH-060	100	600	6
6MBP30RY-060	30	600	6	6MBP100RS-060	100	600	6
6MBR40SA-060	40	600	6	6MBP100RTA-060	100	600	6
6MBP40RUB-060	40	600	6	6MBP100RTC-060	100	600	6
6MBP40SA-060	40	600	6	6MBP100RTD-060	100	600	6
6MBP50JA(JB)060	50	600	6	6MBP100RTS-060	100	600	6
6MBP50NA-060	50	600	6	6MBP100RUA-060	100	600	6
6MBP50RA-060	50	600	6	6MBP100TEA-060	100	600	6
6MBP50RC-060	50	600	6	6MBP150JA(JB)-060	150	600	6
6MBP50RH-060	50	600	6	6MBP150NA-060	150	600	6
6MBP50RTA-060	50	600	6	6MBP150RA-060	150	600	6
6MBP50RTC-060	50	600	6	6MBP150RE-060	150	600	6
6MBP50RTF-060	50	600	6	6MBP150RF-060	150	600	6
6MBP50TEA-060	50	600	6	6MBP150RS-060	150	600	6

FUJI IPM&PIM Modules

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
6MBP150RTC-060	150	600	6	6MBP300RTS-060	300	600	6
6MBP160RD-060	160	600	6	6R6D10A-050AHX	10	500	6
6MBP160RTA-060	160	600	6	6R6D10A-050BHX	10	500	6
6MBP160RUA-060	200	600	6	6R6D10A-120BHX	10	1200	6
6MPB200RTA-060	200	600	6	6R6D15A-050AHX	15	500	6
6MBP200JA(JB)060	200	600	6	6R6D15A-050BHX	15	500	6
6MBP200KA-060	200	600	6	6R6D15A-050EHR	15	500	6
6MBP200RA-060	200	600	6	6R6D15A-120BHX	15	1200	6
6MBP200RL-060	200	600	6	6R6D20A-050BHX	20	500	6
6MBP200RS-060	200	600	6	6R6D25A-120BHX	25	1200	6
6MBP200RTS-060	200	600	6	6R6D30A-050BHX	30	500	6
6MBP300KA-060	300	600	6	6R6D50A-050BHX	50	500	6
6MBP300RA-060	300	600	6				
6MBP15RA-120	15	1200	6	6MBP75RF-120	75	1200	6
6MBP25RA-120	25	1200	6	6MBP75RS-120	75	1200	6
6MBP25RC-120	25	1200	6	6MBP75RSA-120	75	1200	6
6MBP25RS-120	25	1200	6	6MBP100JA-120	100	1200	6
6MBR35SB-120	35	1200	6	6MBP100RA120	100	1200	6
6MBP50JA-120	50	1200	6	6MBP100RS-120	100	1200	6
6MBP50RA120	50	1200	6	6MBP100RSA-120	100	1200	6
6MBP50RS-120	50	1200	6	6MBP150RA-120	150	1200	6
6MBP75J-120	75	1200	6	6MBP150RS-120	150	1200	6
6MBP75JA-120	75	1200	6	6MBP150RSA-120	150	1200	6
6MBP75RA-120	75	1200	6	6MBP300RSM-120	300	1200	6
6MBP75RC-120	75	1200	6				
7MBR20SC-060	20	600	7	7MBP75JB-060	75	600	7
7MBI30SA-060	30	600	7	7MBP75KB-060	75	600	7
7MBR30LC-060	30	600	7	7MBP75NA-060	75	600	7
7MBR30NE-060	30	600	7	7MBP75RA-060	75	600	7
7MBR30NF-060	30	600	7	7MBP75RHA-060	75	600	7
7MBR30NH-060	30	600	7	7MBR75GE-060	75	600	7
7MBR30SA-060	30	600	7	7MBR75N-060	75	600	7
7MBR30SA-060E	30	600	7	7MBR75SB-060	75	600	7
7MBR30SC-060	30	600	7	7MBR75SD-060	75	600	7
7MBR30U2A-060	30	600	7	7MBP80RTA-060	80	600	7
7MBI50SA-060	50	600	7	7MBP80RTF-060	80	600	7
7MBP50JB-060	50	600	7	7MBI100N-060	100	600	7
7MBP50KB-060	50	600	7	7MBI100RSA-060	100	600	7
7MBP50L-060	50	600	7	7MBI100SA-060B	100	600	7
7MBP50NA-060	50	600	7	7MBP100JA-060	100	600	7
7MBP50RA-060	50	600	7	7MBP100JB-060	100	600	7
7MBP50RTA-060	50	600	7	7MBP100KB-060	100	600	7
7MBP50RTB-060	50	600	7	7MBP100NA-060	100	600	7
7MBR50JC-060	50	600	7	7MBP100RA-060	100	600	7
7MBR50LB-060	50	600	7	7MBP100TEA-060	100	600	7
7MBR50LC-060	50	600	7	7MBR100SA-060	100	600	7
7MBR50LE-060	50	600	7	7MBR100SB-060	100	600	7
7MBR50NE-060	50	600	7	7MBR100SD-060	100	600	7
7MBR50NF-060	50	600	7	7MBI150RSA-060	150	600	7
7MBR50NH-060	50	600	7	7MBI150SA-060	150	600	7
7MBR50SA-060(060B)	50	600	7	7MBI150SA-060B	150	600	7
7MBR50SB-060	50	600	7	7MBI150U2E-060	150	600	7
7MBR50SC-060	50	600	7	7MBP150JB-060	150	600	7
7MBR50SD-060	50	600	7	7MBP150KA-060	150	600	7
7MBI75N-060	75	600	7	7MBP150KB-060	150	600	7
7MBP75JA-060	75	600	7	7MBP150NA-060	150	600	7






FUJI IPM&PIM Module

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
7MBP150RA-060	150	600	7	7D50A-050EJR	50	500	7
7MBP150RF-060	150	600	7	7D50D-050	50	500	7
7MBP160RTA-060	160	600	7	7D50D-050EHR	50	500	7
7MBR160RTA-060	160	600	7	7D75A-050EHR	75	500	7
7MBP200JB-060	200	600	7	7D75A-050EJR	75	500	7
7MBP200RA-060	200	600	7	7D75D050EHR	75	500	7
7MBP300RA-060	30	600	7	7D75D-050EHR	75	500	7
7D30A-050EHR	30	500	7	7D100A-050EHR	100	500	7
7D30A-050EJR	30	500	7	7D100D-050EHR	100	500	7
7D30D-050EHR	30	500	7	7D150A-050EHR	150	500	7
7D50A-050EHR	50	500	7	7D150D-050EHR	150	500	7
7MBR8LA-120	8	1200	7	7MBR35HU-120	35	1200	7
7MBR8LC-120	8	1200	7	7MBR35SA-120	35	1200	7
7MBR10NE-120	10	1200	7	7MBR35SB-120	35	1200	7
7MBR10NF-120	10	1200	7	7MBR35SB-120B	35	1200	7
7MBR10SA-120	10	1200	7	7MBR35SB-140	35	1200	7
7MBR10SA-120D	10	1200	7	7MBR35SD-120	35	1200	7
7MBR10SA-120E	10	1200	7	7MBR35UE-120	35	1200	7
7MBR10SA-140	10	1400	7	7MBR35UH-120	35	1200	7
7MBR10SB-120	10	1200	7	7MBI40N-120	40	1200	7
7MBR10SC-120	10	1200	7	7MBP40N-120	40	1200	7
7MBR10UG-120	10	1200	7	7MBI50N-120	50	1200	7
7MBI15NF-120	15	1200	7	7MBP50JA-120	50	1200	7
7MBR15LA-120	15	1200	7	7MBP50N-120	50	1200	7
7MBR15LC-120	15	1200	7	7MBP50RA-120	50	1200	7
7MBR15LD-120	15	1200	7	7MBR50HU-120	50	1200	7
7MBR15LE-120	15	1200	7	7MBR50SA-120	50	1200	7
7MBR15NE-120	15	1200	7	7MBR50SB-120	50	1200	7
7MBR15NF-120	15	1200	7	7MBR50SD-120	50	1200	7
7MBR15SA-120	15	1200	7	7MBR50UH-120	50	1200	7
7MBR15SA-120D	15	1200	7	7MBI75SA-120B	75	1200	7
7MBR15SC-120	15	1200	7	7MBP75JB-120	75	1200	7
7MBR15UG-120	15	1200	7	7MBP75RA-120	75	1200	7
7MBI25NF120	25	1200	7	7MBP75RE-120	75	1200	7
7MBP25RA-120	25	1200	7	7MBR75S-120	75	1200	7
7MBP25RTA-120	25	1200	7	7MBR75SA-120	75	1200	7
7MBR25LC-120	25	1200	7	7MBR75U4R-120	75	1200	7
7MBR25LD-120	25	1200	7	7MBR75UB-120	75	1200	7
7MBR25NE-120	25	1200	7	7MBP80RA-120	80	1200	7
7MBR25NF-120	25	1200	7	7MBI100U4E-120	100	1200	7
7MBR25RA-120	25	1200	7	7MBI100UE-120	100	1200	7
7MBR25SA-120	25	1200	7	7MBP100JB-120	100	1200	7
7MBR25SA-120B	25	1200	7	7MBP100RA-120	100	1200	7
7MBR25SA-120D	25	1200	7	7MBR100U4B-120	100	1200	7
7MBR25SC-120	25	1200	7	7MBP150JA-120	150	1200	7
7MBR25SC-120RFE	25	1200	7	7MBP150PA-120	150	1200	7
7MBR25UG-120	25	1200	7	7MBP150RA-120	150	1200	7
7MBR30NF-120	30	1200	7				



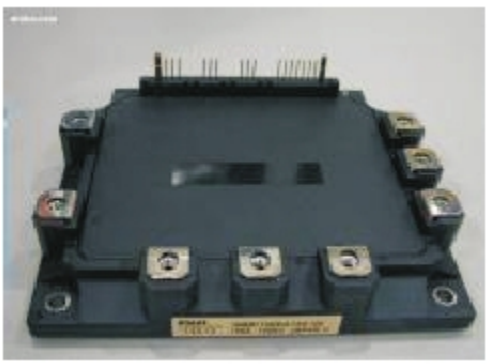

TOSHIBA IPM&PIM



Silicon N Channel IGBT

Features


- Integrates inverter & control circuits (IGBT drive units, protection units for over-current, under-voltage &over-temperature) in one package.
- The electrodes are isolated from case.
- High speed type IGBT
- Low thermal resistance

Application


- High Power Switching Applications
- Motor Control Applications

Schematic

6U

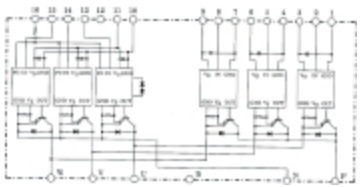

7U

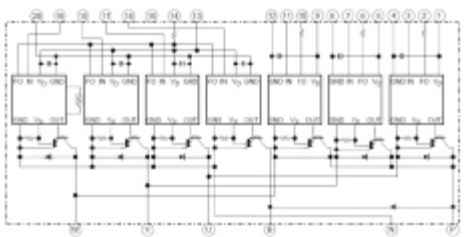

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
MIG20J103H	20	600	6	MIG100J101HD(HE)	100	600	6
MIG20J105L(LA)	20	600	6	MIG100J201H(HC)	100	600	7
MIG20J106L	20	600	6	MIG100Q201H	100	1200	7
MIG30J101H	30	600	6	MIG150J101H	150	600	6
MIG30J102LA	30	600	6	MIG150J102HC(HF)	150	600	7
MIG30J102LB	30	600	6	MIG150J202H	150	600	6
MIG30J103H	30	600	6	MIG150J202HA(HC)	150	600	6
MIG30J103HA(HA/HD)	30	600	6	MIG150Q101H	150	1200	2
MIG30J105L	30	600	6	MIG150Q201H	150	1200	2
MIG30J106L	30	600	6	MIG200J101H	200	600	2
MIG50J101H	50	600	6	MIG200J201H	200	600	2
MIG50J201H(HC)	50	600	7	MIG200Q101H	200	1200	2
MIG50Q201H	50	1200	7	MIG200Q201H	200	1200	2
MIG50Q202H	50	1200	7	MIG300J101H	300	600	2
MIG75J101H(HD)	75	600	6	MIG300Q101H	300	1200	2
MIG75J201H(HD)	75	600	7	MIG300Q201H	300	1200	2
MIG75Q201H	75	1200	7	MIG400J101H	400	600	2
MIG75Q202H	75	1200	7	MIG500J101	500	600	2
MIG100J101H	100	600	2	MIG500J101H	500	600	2
MIG50J4CSB1W	50	600	4	MIG75J6CSB1W	75	600	6
MIG50J7CSA0A	50	600	7	MIG75J7CSA0A	75	600	7
MIG50J7CSB1W	50	600	7	MIG75J7CSBIW	75	600	7
MIG50Q6CMB1X	50	1200	6	MIG75J7KS50	75	600	7
MIG50Q6CSB1X	50	1200	6	MIG75Q6CMB1X	75	1200	6
MIG50Q7CSA0X	50	1200	7	MIG75Q7C1X	75	1200	7
MIG50Q7CSA0X	50	1200	7	MIG75Q7CSA0X	75	1200	7
MIG50Q7CSB1X	50	1200	7	MIG75Q7CSB1X	75	1200	7
MIG75J6CS81W	75	600	6	MIG100J7CDAX	100	600	7

TOSHIBA IPM&PIM Modules

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
MIG100J7CSA0A	100	600	7	MIG300Q2CM1BX	300	1200	2
MIG100J7KS50	100	600	7	MIG300Q2CMB1X	300	1200	2
MIG100Q6CMB1X	100	1200	6	MIG300Q2YS60A	300	1200	2
MIG100Q7CSA0X	100	1200	7	MIG400J2CSB1W	400	600	2
MIG150J7CSA0A	150	600	7	MIG400Q2CMB1X	400	1200	2
MIG150J7CSB1W	150	600	7	MIG400Q2YS60A	400	1200	2
MIG150J7CSB2W	150	600	7	MIG600J2CMA0A	600	600	2
MIG150J7KS50	150	600	7	MIG600J2CMB1W	600	600	2
MIG150Q6CMA0X	150	1200	6	MIG600J2CSB1W	600	600	2
MIG150Q6CMB1X	150	1200	6	MIG600J2YS60A	600	600	2
MIG150Q6COMAM	150	1200	6	MIG10J503H	10	600	6
MIG150Q6CSB1X	150	1200	6	MIG15J503H	15	600	6
MIG150Q7CSA0X	150	1200	7	MIG20J501L	20	600	6
MIG200J6CMB1W	200	600	6	MIG30J502H	30	600	6
MIG200Q2CSB1X	200	1200	2	MIG30J502L	30	600	6
MIG300J2CSB1W	300	600	2				
TOSHIBA PIM Modules							
MIG10Q805H	10	1200	6	MIG25Q901H	25	1200	7
MIG10Q806H	10	1200	6	MIG25Q804H	25	1200	6
MIG10Q906H	10	1200	6	MIG25Q806H	25	1200	6
MIG10Q906HA	10	1200	6	MIG25Q901H	25	1200	6
MIG15J805H	15	600	6	MIG25Q904H	25	1200	6
MIG15J904H	15	600	6	MIG25Q906H	25	1200	6
MIG15Q804H	15	1200	6	MIG25Q906HA	25	1200	6
MIG15Q806H	15	1200	6	MIG30J804H	30	600	6
MIG15Q901H	15	1200	7	MIG30J806H	30	600	6
MIG15Q904H	15	1200	6	MIG30J901H	30	600	7
MIG15Q906H	15	1200	6	MIG30J902H	30	600	6
MIG15Q906HA	15	1200	6	MIG30J904H	30	600	6
MIG20J805H	20	600	6	MIG30J906H	30	600	6
MIG20J806H	20	600	6	MIG30J906HA	30	600	6
MIG20J901H	20	600	7	MIG30J951H	30	600	7
MIG20J902H	20	600	6	MIG50J804H	50	600	6
MIG20J906H	20	600	6	MIG50J806H	50	600	6
MIG20J906HA	20	600	6	MIG50J901H	50	600	7
MIG20J951H	20	600	7	MIG50J904H	50	600	6
MIG20J952H	20	600	6	MIG50J906H	50	600	6













SanKen IPM&PIM



FLAT-BASE TYPE
INSULATED PACKAGE

Features

- ●Complete Output Power Circuit
- ●Gate Drive Circuit
- ●Protection Logic
- —Short Circuit
- —Over Current
- —Over Temperature
- —Under Voltage

Application


- ●Inverters
- ●UPS
- ●Motion/Servo Control
- ●Power Supplies

Schematic

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
SP15Z6C	15	1200	7	SP200Z2C	200	1200	2
SP25Z6C	25	1200	7	SP300Z2C	300	1200	2
SP50Z6C	50	1200	7	TSP100Z2	100	1200	2
SP75Z6C	75	1200	7	TSP100Z6	100	1200	7
SP100Z6	100	1200	7	TSP150Z2	150	1200	2
SP150Z2C	150	1200	2	TSP200Z2	200	1200	2
SanKen PIM Modules							
SM10X6E	10	600	6	SM30X6E	30	600	6
SM15X6A	15	600	6	SM50X6E	50	600	6
SM15X6E	15	600	6	FSM30X6S	30	600	6
SM20X6A	20	600	6	FSM50X6S	50	600	6
SM20X6E	20	600	6				

MOTOROLA PIM Modules

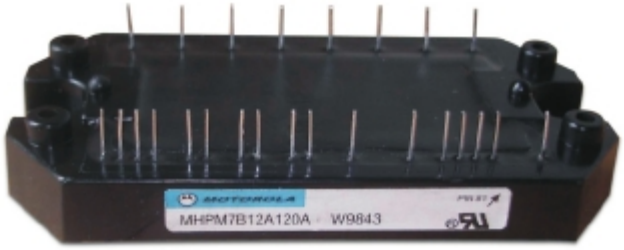

Hybrid Power Module


Features

- Short Circuit Rated 10 us @ 25°C
- Access to Positive and Negative DC Bus
- Convenient Package Outline
- Pin-to-Baseplate Isolation Exceeds 2500 Vac (rms)
- DC Bus Current Sense Resistor Included
- Temperature Sensor Included

Application

- Inverters
- UPS
- Motion/Servo Control
- Power Supplies

Schematic

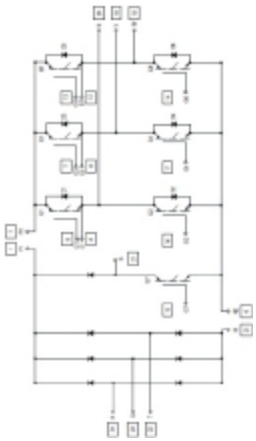


Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
MHPM7A15A60A	15	600	7	MHPM7A25A120B	25	1200	7
MHPM7A20A60A	20	600	7	MHPM7B8A120A	8	1200	7
MHPM7A30A60B	30	600	7	MHPM7B12A120A	12	1200	7
MHPM7B15A60A	15	600	7	MHPM7B15A120A	15	1200	7
MHPM7A8A120A	8	1200	7	MHPM7B16A120B	16	1200	7
MHPM7A15A120A	15	1200	7	MHPM7B25A120B	25	1200	7
MHPM7A16A120B	16	1200	7				





IXYS PIM Modules

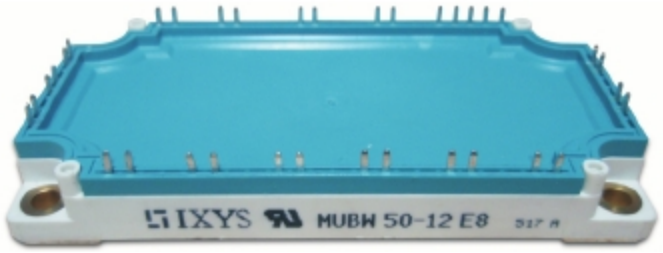

Converter - Brake - Inverter Module

Features


- ●High level of integration - only one power semiconductor module required for the whole drive
- ●Fast rectifier diodes for enhanced EMC behaviour
- ●NPT IGBT technology with low saturation voltage, low switching losses, high RBSOA and short circuit ruggedness
- ●Epitaxial free wheeling diodes with Hiperfast and soft reverse recovery
- ●Industry standard package with insulated copper base plate and soldering pins for PCB mounting
- ●Temperature sense included

Applications

AC motor drives with

- ●Input from single or three phase grid
- ●Three phase synchronous or asynchronous motor
- ●electric braking operation

Schematic

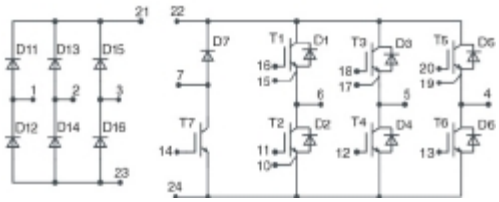

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
MUBW6-06A6	4.5	90℃/ 600	7	MUBW15-12A6K	11	90℃/ 1200	7
MUBW10-06A6	8	90℃/ 600	7	MUBW15-12A7	25	80℃/ 1200	7
MUBW15-06A6	15	90℃/ 600	7	MUBW25-12A7	25	80℃/ 1200	7
MUBW20-06A6	20	90℃/ 600	7	MUBW30-12A6	17	90℃/ 1200	7
MUBW25-06A6	25	90℃/ 600	7	MUBW30-12A6K	17	90℃/ 1200	7
MUBW35-06A6	22	90℃/ 600	7	MUBW35-12A7	35	80℃/ 1200	7
MUBW50-06A8	50	80℃/ 600	7	MUBW35-12A8	35	80℃/ 1200	7
MUBW10-12A6	8	90℃/ 1200	7	MUBW50-12E8	62	80℃/ 1200	7
MUBW10-12A7	10	80℃/ 1200	7	MUBW75-17T8	65	80℃/ 1700	7
MUBW15-12A6	15	90℃/ 1200	7				



SEMIKRON PIM Modules



3-phase bridge rectifier + braking chopper + 3-phase bridge inverter


Features

- Trench IGBTs
- Robust and soft freewheeling diodes in CAL technology
- Highly reliable spring contacts for electrical connections

Applications

- Inverter
- Motor Control Applications

Schematic

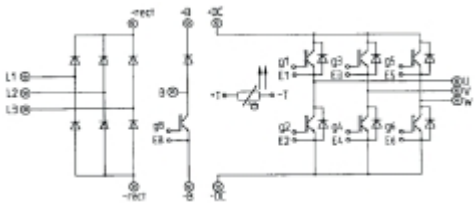

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
SKiiP10NEB063T10	10	600	7	SKiiP21NAB063T30	20	600	7
SKiiP11HEB063T1	12	600	7	SKiiP21NAB06IT5	20	600	7
SKiiP11NAB063T42	12	600	7	SKiiP21NAB12I	20	1200	7
SKiiP11NAB126V1	12	1200	7	SKiiP21NAB12IT10	20	1200	7
SKiiP11NAC0631T	12	600	7	SKiiP21NAB12T31	20	1200	7
SKiiP11NEB063T15	12	600	7	SKiiP21NEB063T29	20	600	7
SKiiP11NEB063T22	12	600	7	SKiiP21NEB063T39	20	600	7
SKiiP11NEC063IT0	12	600	7	SKiiP22NAB063T1	28	600	7
SKiiP11NEC063IT1	12	600	7	SKiiP22NAB063T33	28	600	7
SKiiP1242GB120-4K0093	1200	1200	7	SKiiP22NAB126V10	28	1200	7
SKiiP12NAB066V1	22	600	7	SKiiP22NAB12I	28	1200	7
SKiiP12NAB126V1	22	1200	7	SKiiP22NAB12IT10	28	1200	7
SKiiP13NAB065V1	24	600	7	SKiiP22NAB12IT45	28	1200	7
SKiiP14NAB066V1	16	600	7	SKiiP22NAB12T10	28	1200	7
SKiiP20NAB12	16	1200	7	SKiiP22NAB12T19	28	1200	7
SKiiP20NAB12I	16	1200	7	SKiiP22NAB12T35	28	1200	7
SKiiP20NAB12IT10	16	1200	7	SKiiP22NAB12T46	28	1200	7
SKiiP20NAB12IT45	16	1200	7	SKiiP22NAC12IT10	28	1200	7
SKiiP20NAB12IT45	16	1200	7	SKiiP22NAC12IT42	28	1200	7
SKiiP20NAB12IT6	16	1200	7	SKiiP22NAC12IT5	28	1200	7
SKiiP20NAB12T17	16	1200	7	SKiiP22NEB063T39	28	600	7
SKiiP20NAB12T34	16	1200	7	SKiiP23NAB126V1	40	1200	7
SKiiP20NAB12T45	16	1200	7	SKiiP23NAB126V10	40	1200	7
SKiiP20NAC12IT2	16	1200	7	SKiiP24NAB063T12	52	600	7
SKiiP20NAC12IT42	16	1200	7	SKiiP24NAB126V1	52	1200	7
SKiiP21NAB063IT10	20	600	7	SKiiP25AC128T1	73	1200	7

SEMIKRON PIM Modules

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
SKiiP25AC128T2	73	1200	7	SKiiP32NAB12T16	75	1200	7
SKiiP25AC12T2	73	1200	7	SKiiP32NAB12T49	75	1200	7
SKiiP25AC126V1	73	1200	7	SKiiP32NAC12IT42	75	1200	7
SKiiP25NAB065V1	73	600	7	SKiiP32NAC12T3	75	1200	7
SKiiP26NAB066V1	94	600	7	SKiiP32NAC12T42	75	1200	7
SKiiP28ANB16V1	118	1600	7	SKiiP32UPS06	75	600	7
SKiiP28ANB16V2	118	1600	7	SKiiP33UPS06	80	600	7
SKiiP29PSS065T11	120	600	7	SKiiP38AC126V2	118	1200	7
SKiiP30NAB12	45	1200	7	SKiiP39AC12T	157	1200	7
SKiiP30NAB12T10	45	1200	7	SKiiP39AC12T4V10	157	1200	7
SKiiP30NAB12T11	45	1200	7	SKiiP642GB120-208/08	600	1200	7
SKiiP30NAB12T15	45	1200	7	SKiiP642GB120-208CTV	600	1200	7
SKiiP30NAB12T49	45	1200	7	SKiiP81AN15T1	65	1200	7
SKiiP30NAC12IT1	45	1200	7	SKiiP81AN15T10	65	150	7
SKiiP30NAC12IT42	45	1200	7	SKiiP82AC121T1	75	1500	7
SKiiP30NAC12T42	45	1200	7	SKiiP82AC128IST1	75	1200	7
SKiiP31NAB063T21	45	600	7	SKiiP82AC12IT1	75	1200	7
SKiiP31AC12	45	1200	7	SKiiP82AHB15T1	75	1200	7
SKiiP31NAB063T12	45	600	7	SKiiP82ANB15T1	75	1500	7
SKiiP31NAB065T12	45	600	7	SKiiP82ANB15T10	75	1500	7
SKiiP31NAB12	45	1200	7	SKiiP83AC128IT1	125	1200	7
SKiiP31NAB125T12	45	1200	7	SKiiP83AC12I	125	1200	7
SKiiP31NAB12T10	45	1200	7	SKiiP83AC12IT10	125	1200	7
SKiiP31NAB12T11	45	1200	7	SKiiP83AC12IT1	125	1200	7
SKiiP31NAB12T16	45	1200	7	SKiiP83AC12IT46	125	1200	7
SKiiP31NAB12T18	45	1200	7	SKiiP83AC12T2	125	1200	7
SKiiP31NAB12T49	45	1200	7	SKiiP83AHB15	125	1500	7
SKiiP31NAC12IT42	45	1200	7	SKiiP83AHB15T1	125	1500	7
SKiiP31NAC12T2	45	1200	7	SKiiP83ANB15	125	1500	7
SKiiP31NAC12T42	45	1200	7	SKiiP83ANB15IT1	125	1500	7
SKiiP32AC12T3	75	1200	7	SKiiP83ANB15T1	125	1500	7
SKiiP32AC12T43	75	1200	7	SKiiP83ANB15T4	125	1500	7
SKiiP32NAB12	75	1200	7	SKiiP83ANB15T5	125	1500	7
SKiiP32NAB125T12	75	1200	7	SKiiP942GB120-317CTV	900	1200	7
SKiiP32NAB12T1	75	1200	7	SKiiP942GB120-3DK0097	900	1200	7
SKiiP32NAB12T10	75	1200	7	SKiiP942GB120-407/06	900	1200	7
SKiiP32NAB12T11	75	1200	7	SKiiP942GB123D	900	1200	7
SKiiP32NAB12T12	75	1200	7				














MITSUBISHI Thyristor Modules

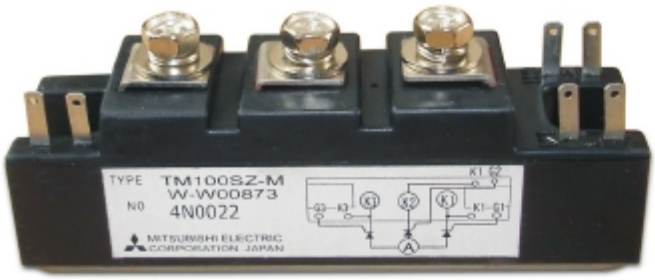

HIGH VOLTAGE HIGH POWER GENERAL USE
HIGH POWER GENERAL USE
INSULATED TYPE


Features

- DOUBLE ARMS
- Insulated Type


Application

- DC motor control
- NC equipment
- AC motor control
- Contactless switches
- Electric furnace temperature control
- Light dimmers

Schematic



2U



3U

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
TM20DA-M(H)	20	400(800)	2	TM130DZ-M(H)	130	400(800)	2
TM20RA-M(H)	20	400(800)	2	TM130EZ-M(H)	130	400(800)	2
TM25CZ-M(H)	25	400(800)	2	TM130GZ-M(H)	130	400(800)	2
TM25DZ-M(H)	25	400(800)	2	TM130PZ-M(H)	130	400(800)	2
TM25EZ-M(H)	25	400(800)	2	TM130RZ-M(H)	130	400(800)	2
TM25RZ-M(H)	25	400(800)	2	TM200CZ-M(H)	200	400(800)	2
TM55CZ-M(H)	55	400(800)	2	TM200DZ-M(H)	200	400(800)	2
TM55DZ-M(H)	55	400(800)	2	TM200EZ-M(H)	200	400(800)	2
TM55EZ-M(H)	55	400(800)	2	TM200GZ-M(H)	200	400(800)	2
TM55RZ-M(H)	55	400(800)	2	TM200PZ-M(H)	200	400(800)	2
TM90CZ-M(H)	90	400(800)	2	TM200RZ-M(H)	200	400(800)	2
TM90DZ-M(H)	90	400(800)	2	TM400CZ-M(H)	400	400(800)	2
TM90EZ-M(H)	90	400(8000	2	TM400DZ-M(H)	400	400(800)	2
TM90RZ-M(H)	90	400(800)	2	TM400PZ-M(H)	400	400(800)	2
TM130CZ-M(H)	130	400(800)	2	TM400UZ-M(H)	400	400(800)	2
TM25CZ-24(2H)	25	1200(1600)	2	TM130CZ-24(2H)	130	1200(1600)	2
TM25DZ-24(2H)	25	1200(1600)	2	TM130DZ-24(2H)	130	1200(1600)	2
TM25EZ-24(2H)	25	1200(1600)	2	TM130EZ-24(2H)	130	1200(1600)	2
TM25RZ-24(2H)	25	1200(1600)	2	TM130GZ-24(2H)	130	1200(1600)	2
TM55CZ-24(2H)	55	1200(1600)	2	TM130PZ-24(2H)	130	1200(1600)	2
TM55DZ-24(2H)	55	1200(1600)	2	TM130RZ-24(2H)	130	1200(1600)	2
TM55EZ-24(2H	55	1200(1600)	2	TM200CZ-24(2H)	200	1200(1600)	2
TM55RZ-24(2H)	55	1200(1600)	2	TM200DZ-24(2H)	200	1200(1600)	2
TM90CZ-24(2H)	90	1200(1600)	2	TM200EZ-24(2H)	200	1200(1600)	2
TM90DZ-24(2H)	90	1200(1600)	2	TM200GZ-24(2H)	200	1200(1600)	2
TM90EZ-24(2H)	90	1200(1600)	2	TM200PZ-24(2H)	200	1200(1600)	2
TM90RZ-24(2H)	90	1200(1600)	2	TM200RZ-24(2H)	200	1200(1600)	2

MITSUBISHI Thyristor Modules

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
TM400CZ-24(H)	400	1200(1600)	2	TM400HA-M	400	600	1
TM400DZ-24(H)	400	1200(1600)	2	TM400HA-H	400	800	1
TM400PZ-24(H)	400	1200(1600)	2	TM400HA-24	400	1200	1
TM400UZ-24(H)	400	1200(1600)	2	TM400HA-2H	400	1600	1
TM60SA-6	60	300		TM250SA-10	250	500	
TM60SZ-M	60	400		TM90DA-H	90	800	
TM90SA-6	90	300		TM10T3B-M(H)	10	400(800)	
TM100SZ-M	100	400		TM15T3A-M(H)	15	400(800)	
TM150SA-6	150	300		TM25T3A-M(H)	25	400(800)	
TM150SA-9	150	450					





SEMIKRON Thyristor Modules



Thyristor / Diode Modules


Features

- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability


Application

- DC motor control (e.g. for machine tools)
- Temperature control (e.g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)

Schematic



SKKT



SKKH

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
SKKT15	15	600-1600	2	SKKT118/12G6	119	1200	2
SKKT27/12G6	28	1200	2	SKKT118/16G6	119	1600	2
SKKT27/16G6	28	1600	2	SKKT118/18G6	119	1800	2
SKKT42/12G6	28	1200	2	SKKT122	122	800-1800	2
SKKT42/16G6	28	1600	2	SKKT132	130	800-1800	2
SKKT57/12G6	55	1200	2	SKKT132H4	132	2000-2200	2
SKKT57/16G6	55	1600	2	SKKT162	160	800-1800	2
SKKT57H4	55	2000-2200	2	SKKT162H4	162	2000-2200	2
SKKT72H4	70	2000-2200	2	SKKT172	172	1400-1800	2
SKKT92/08G6	98	800	2	SKKT250	250	800-1800	2
SKKT92/12G6	98	1200	2	SKKT273	273	1200-1800	2
SKKT92/16G6	98	1600	2	SKKT280	280	2000-2200	2
SKKT106/12G6	107	1200	2	SKKT323	323	1200-1600	2
SKKT106/16G6	107	1600	2	SKKT330	330	800-1800	2
SKKT106/18G6	107	1800	2	SKKT570	570	1200-1800	2

SEMIKRON Thyristor Modules

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
SKKH15	15	600-1600	2	SKKL15	15	600-1600	2
SKKH57/08G6	55	800	2	SKKL57/08G6	55	800	2
SKKH57/12G6	55	1200	2	SKKL57/12G6	55	1200	2
SKKH57/16G6	55	1600	2	SKKL57/16G6	55	1600	2
SKKH57/18G6	55	1800	2	SKKL57/18G6	55	1800	2
SKKH57H4	55	2000-2200	2	SKKL57H4	55	2000-2200	2
SKKH72/12G6	80	1200	2	SKKL72/12G6	80	1200	2
SKKH72/16G6	80	1600	2	SKKL72/16G6	80	1600	2
SKKH72/18G6	80	1800	2	SKKL72/18G6	80	1800	2
SKKH72H4	70	2000-2200	2	SKKL72H4	70	2000-2200	2
SKKH92/12G6	98	1200	2	SKKL92/12G6	98	1200	2
SKKH92/16G6	98	1600	2	SKKL92/16G6	98	1600	2
SKKH92/18G6	98	1800	2	SKKL92/18G6	98	1800	2
SKKH106/12G6	107	1200	2	SKKL106/12G6	107	1200	2
SKKH106/16G6	107	1600	2	SKKL106/16G6	107	1600	2
SKKH106/18G6	107	1800	2	SKKL106/18G6	107	1800	2
SKKH132	130	800-1800	2	SKKL132	130	800-1800	2
SKKH132H4	132	2000-2200	2	SKKHL132H4	132	2000-2200	2
SKKH162	160	800-1800	2	SKKL162	160	800-1800	2
SKKH162H4	162	2000-2200	2	SKKL162H4	162	2000-2200	2
SKKH172	172	1400-1800	2	SKKL172	172	1400-1800	2
SKKH250	250	800-1800	2	SKKL250	250	800-1800	2
SKKH273	273	1200-1800	2	SKKL273	273	1200-1800	2
SKKH280	280	2000-2200	2	SKKL280	280	2000-2200	2
SKKH323	323	1200-1600	2	SKKL323	323	1200-1600	2
SKKH330	330	800-1800	2	SKKL330	330	800-1800	2
SKKH570	570	1200-1800	2	SKKL570	570	1200-1800	2
			2				
SKKT27B08G6	28	800	2	SKKT106B12G6	107	1200	2
SKKT27B12G6	28	1200	2	SKKT106B16G6	107	1600	2
SKKT27B16G6	28	1600	2	SKKT106B18G6	107	1800	2
SKKT57B08G6	55	800	2	SKKT118B12G6	119	1200	2
SKKT57B16G6	55	1600	2	SKKT118B16G6	119	1600	2
SKKT57B18G6	55	1800	2	SKKT118B18G6	119	1800	2
SKKT92B08G6	98	800	2				
SKKT92B16G6	98	1600	2				
SKKT92B18G6	98	1800	2				












SEMIKRON Thyristor Modules

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
SKDH100	100	800-1400		SKBT28	28	600-1400	
SKDH115	110	1200-1600		SKBT40	40	800-1400	
SKDH145	140	1200-1600					
SKDH116/..-L75	110	1200-1600		SKBZ28	28	800-1400	
SKDH146/..-L75	140	1200-1600					
SKDH116/..-L100	110	1200-1600		SKCH28	28	1200-1600	
SKDH146/..-L100	140	1200-1600		SKCH40	40	1200-1600	
SKDH146/..-L200	140	800					
SKDT60	60	400-1400		SKMD40F	40	400-1000	
SKDT115	110	1200-1600		SKMD42F	42	1000-1500	
SKDT145	140	1200-1600		SKMD105F	105	800-1600	
				SKMD150F	150	1200	
SKET330	330	400-1400		SKMD202E	200	200-300	
SKET400	400	400-1400					
SKET740	740	400-1400		SKND42F	42	1000-1500	
SKET800	800	400-1400		SKND105F	105	800-1600	
				SKND150F	150	1200	
SKMT92	95	1200-1600		SKND202E	202	200-300	
				SKND205F	205	600	
SKNH56	55	1200-1600					
SKNH91	90	1200-1600					
SKBH28	28	1200-1600					



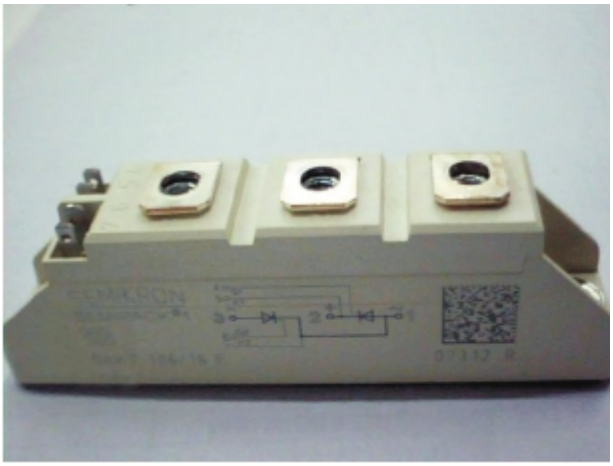



EUPEC Thyristor Modules



Netz-Thyristor-Modul
Phase Control Thyristor Module


Features

- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability


Application

- DC motor control (e.g. for machine tools)
- Temperature control (e.g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)


Schematic



TD



DT



TT

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
TT18N	18		2	TT121N	121		2
TT25N	25		2	TT131N	131		2
TT36N	36		2	TT142N	142		2
TT46N	46		2	TT162N	162		2
TT56N	56		2	TT170N	170		2
TT60N	60		2	TT180N	180		2
TT61N	61		2	TT210N	210		2
TT66N	66		2	TT215N	215		2
TT71F	71		2	TT250N	250		2
TT75N	75		2	TT251N	251		2
TT85N	85		2	TT285N	285		2
TT92N	92		2	TT330N	330		2
TT93N	93		2	TT425N	425		2
TT95N	95		2	TT500N	500		2
TT104N	104		2	TT570N	570		2
TT105N	105		2				
TT106N	106		2				


EUPEC Thyristor Modules

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
TZ240N	240		1	TZ400N	400		1
TZ310N	310		1	TZ425N	425		1
TZ425N	425		1	TZ430N	430		1
TZ500N	500		1	TZ500N	500		1
				TZ800N	800		1
TD18N	18		2	TD105N	105		2
TD25N	25		2	TD111N	111		2
TD36N	35		2	TD121N	121		2
TD45N	45		2	TD131N	131		2
TD46N	46		2	TD142N	142		2
TD56N	56		2	TD162N	162		2
TD60N	60		2	TD170N	170		2
TD61N	61		2	TD180N	180		2
TD62N	62		2	TD210N	210		2
TD66N	66		2	TD250N	250		2
TD75N	75		2	TD330N	330		2
TD85N	85		2	TD425N	425		2
TD95N	95		2	TD500N	500		2
TD104N	104		2				
DT18N	18		2	DT105N	105		2
DT25N	25		2	DT121N	121		2
DT36N	36		2	DT131N	131		2
DT46N	46		2	DT142N	142		2
DT56N	56		2	DT162N	162		2
DT61N	61		2	DT170N	170		2
DT75N	75		2	DT210N	210		2
DT93N	93		2	DT250N	250		2
DT95N	95		2				
TTB6C95N	95		6	TTW3C85N	85		6
TTB6C110N	110		6	TTW3C115N	112		6
TTB6C135N	135		6	TTW3C145N	145		6
TTB6C165N	165		6				





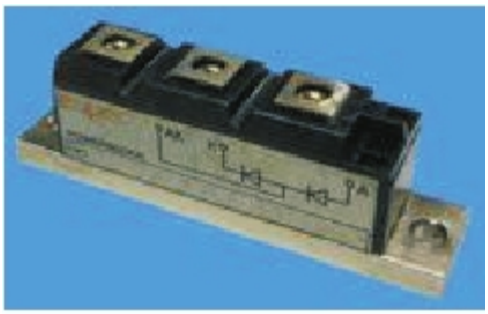







SanRex Thyristor Modules



Thyristor / Diode Modules


Features

- Power Thyristor/Diode Module
- electrically isolated mounting base
- Industrial Standard Package
- Simple Mounting


Application

- Various rectifiers
- AC/DC motor drives
- Heater controls
- Light dimmers
- Static switches

Schematic



PK



PD

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
PK25F80	25	800	2	PK90FG80	90	800	2
PK25FG80	25	800	2	PK90GB80	90	800	2
PK25GB40(80)	25	400(8000	2	PK90HB80	90	800	2
PK25HB80	25	600	2	PK110F80	110	800	2
PK40F60(80)	40	800(800)	2	PK110FG80	110	800	2
PK40FG80	40	800	2	PK130F80	130	800	2
PK55F80	55	800	2	PK130FG80	130	800	2
PK55FG80	55	800	2	PK160F60(80)	160	600(800)	2
PK55GB40(80)	55	400(800)	2	PK200GB80	200	800	2
PK55HB80	55	800	2	PK200HB80	200	800	2
PK70F80	70	800	2	PK250GB80	250	800	2
PK70FG80	70	800	2	PK250HB80	250	800	2
PK90F80	90	800	2				
PK25F120(160)	25	1200(16000	2	PK90F120(160)	90	1200(16000	2
PK25FG160	25	1600	2	PK90F140	90	1400	2
PK25GB160	25	1600	2	PK90FB120	90	1200	2
PK25HB160	25	1600	2	PK90FG160	90	1600	2
PK40F100	40	1000	2	PK90GB160	90	1600	2
PK40F120(160)	40	1200(1600)	2	PK90HB160	90	1600	2
PK40FG160	40	1600	2	PK100F160	100	1600	2
PK55F120(160)	55	1200(1600)	2	PK110F120(160)	110	1200(16000	2
PK55FG160	55	1600	2	PK110FG160	110	1600	2
PK55FQ160	55	1600	2	PK110J160	110	1600	2
PK55GB160	55	1600	2	PK130F120(160)	130	1200(16000	2
PK55HB120(160)	55	1200(1600)	2	PK130FB120	130	1200	2
PK55J160	55	1600	2	PK130FG160	130	1600	2
PK70F120(160)	70	1200(1600)	2	PK130FQ160	130	1600	2
PK70FG160	70	1600	2	PK160F100	160	1000	2

SanRex Thyristor Modules


Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
PK160F120(160)	160	1200(1600)	2	PK250GB160	250	1600	2
PK200GB160	200	1600	2	PK250HB120(160)	250	1200(1600)	2
PK200HB120(160)	200	1200(1600)	2				
PWB60A30	60	300	3	PWB100A60	100	600	3
PWB60A40	60	400	3	PWB130A40	130	400	3
PWB80A30	80	300	3	PWB200A40	200	400	3
PWB80A40	80	400	3	PWB200AA40	200	400	3
PWB100A30	100	300	3	FSD20A60	20	600	
PWB100A40	100	400	3				
PD250HB80	250	800	3	PD90F80	90	800	2
PD25F80	25	800	2	PD90FG80	90	800	2
PD25FG80	25	800	2	PD90GB80	90	800	2
PD25GB80	25	800	2	PD90HB80	90	800	2
PD40F60(80)	40	600(800)	2	PD110F80	110	800	2
PD40FG80	40	800	2	PD110FG80	110	800	2
PD55F80	55	800	2	PD130F80	130	800	2
PD55FG80	55	800	2	PD130FG80	130	800	2
PD55GB80	55	800	2	PD160F80	160	800	2
PD55HB80	55	800	2	PD200GB80	200	800	2
PD70F80	70	800	2	PD200HB80	200	800	2
PD70FG80	70	800	2				
PD25F120(160)	25	1200(1600)	2	PD90FG160	90	1600	2
PD25FG160	25	1600	2	PD90GB160	90	1600	2
PD25GB160	25	1600	2	PD90HB120(160)	90	1200(1600)	2
PD40F120(160)	40	1200(1600)	2	PD110F120(160)	110	1200(1600)	2
PD40FG160	40	1600	2	PD110FG160	110	1600	2
PD55F120(160)	55	1200(1600)	2	PD130F120(160)	130	1200(1600)	2
PD55FG160	55	1600	2	PD130FG160	130	1600	2
PD55GB160	55	1600	2	PD160F120(160)	160	1200(1600)	2
PD55HB160	55	1600	2	PD200F120(160)	200	1200(1600)	2
PD70F120(160)	70	1200(1600)	2	PD200GB160	200	1600	2
PD70FG160	70	1600	2	PD200HB160	200	1600	2
PD90F120(160)	90	1200(1600)	2	PD250HB120(160)	250	1200(1600)	2
PD90F160	90	1600	2				
PE25F120(160)	25	1200(1600)	2	PE110F120(160)	110	1200(1600)	2
PE40F120(160)	40	1200(1600)	2	PE130F120(160)	130	1200(16000	2
PE55F120(160)	55	1200(1600)	2	PE160F120(160)	160	1200(1600)	2
PE70F120(160)	70	1200(1600)	2	PE200HB120(160)	200	1200(1600)	2
PE90F120(160)	90	1200(1600)	2	PE250HB120(160)	250	1200(1600)	2





IR Thyristor Modules

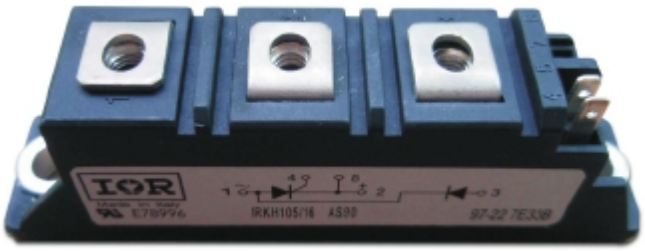

THYRISTOR/DIODE and THYRISTOR/THYRISTOR

Features


- High Voltage
- Electrically Isolated by DBC Ceramic (Al2O3)
- 3500 VRMS Isolating Voltage
- Industrial Standard Package
- High Surge Capability
- Glass Passivated Chips
- Modules uses High Voltage Power thyristor/diodes
- in three Basic Configurations
- Simple Mounting

Application

- DC Motor Control and Drives
- Battery Charges
- Welders
- Power Converters
- Lighting Control
- Heat and Temperature Control

Schematic

IRKT IRKH IRKL

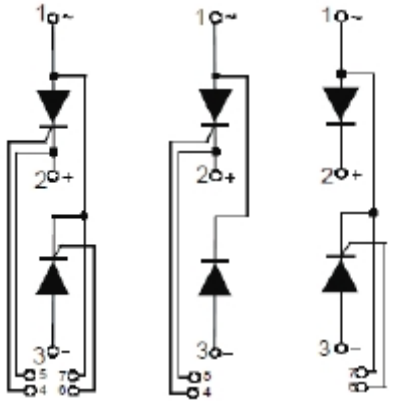

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
IRKT26-12(16)	26	1200(1600)	2	IRKT132-12(14)	132	1200(1400)	2
IRKT41-12(16)	41	1200(1600)	2	IRKT135-12	135	1200	2
IRKT56-12(16)	56	1200(1600)	2	IRKT136-12(16)	136	1200(1600)	2
IRKT56-16A	56	1600	2	IRKT142-12(16)	142	1200(1600)	2
IRKT57-10	57	1000	2	IRKT161-12(16)	161	1200(1600)	2
IRKT71-12(16)	71	1200(1600)	2	IRKT162-12(16)	162	1200(1600)	2
IRKT91-12(16)	91	1200(1600)	2	IRKT162-14	162	1400	2
IRKT91-12S90	91	1200	2	IRKT230-12(16)	230	1200(1600)	2
IRKT91-14	91	1400	2	IRKT250-12(16)	250	1200(1600)	2
IRKT105-12(16)	105	1200(1600)	2	IRKT250-14	250	1400	2
IRKT131-08	131	800	2	IRKT330-12(16)	330	1200(1600)	2
IRKT132-08	132	800	2	IRKT500-12(16)	500	1200(1600)	2
IRKH26-12(16)	26	1200(1600)	2	IRKH105-12(16)	105	1200(1600)	2
IRKH40-12	40	1200	2	IRKH132-12	132	1200	2
IRKH41-12(16)	41	1200(1600)	2	IRKH136-12(16)	136	1200(1600)	2
IRKH56-08	556	800	2	IRKH142-12(16)	142	1200(1600)	2
IRKH56-12(16)	56	1200(1600)	2	IRKH161-12(16)	161	1200(1600)	2
IRKH71-08	71	800	2	IRKH230-12(16)	230	1200(1600)	2
IRKH71-12(16)	71	1200(16000	2	IRKH250-12(16)	250	1200(1600)	2
IRKH91-06	91	600	2	IRKH500-12(16)	500	1200(1600)	2
IRKH91-12(16)	91	1200(1600)	2				
IRKL26-12(16)	26	1200(1600)	2	IRKL142-12(16)	142	1200(1600)	2
IRKL41-12(16)	41	1200(1600)	2	IRKL161-12(16)	161	1200(1600)	2
IRKL56-12(16)	56	1200(1600)	2	IRKL162-12(16)	162	1200(1600)	2
IRKL71-12(16)	71	1200(1600)	2	IRKL230-12(16)	230	1200(1600)	2
IRKL91-12(16)	91	1200(1600)	2	IRKL250-12(16)	250	1200(1600)	2
IRKL105-12(16)	105	1200(1600)	2	IRKL500-12(16)	500	1200(1600)	2
IRKL136-12(16)	136	1200(1600)	2				

IXYS Thyristor Modules



Thyristor Modules
Thyristor/Diode Modules


Features

- International standard package
- Direct copper bonded Al2O3 –ceramic base plate
- Planar passivated chips
- Isolation voltage 3600 V~
- Keyed gate/cathode twin pins


Application

- Motor control
- Power converter
- Heat and temperature control for industrial furnaces and chemical processes
- Lighting control
- Contactless switches
- Solid state switches

Schematic



MCD



MCC

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
MCC18-06(12)io8B	18	600(1200)	2	MCC72-12(16)io1B	72	1200(1600)	2
MCC19-16io1B	19	1600	2	MCC90-06(12)i08B	90	600(1200)	2
MCC21-14io8B	21	1400	2	MCC90-08(12)i01B	90	800(1200)	2
MCC25-06(10)io8B	25	600(1000)	2	MCC95-12(16)io1B	95	1200(1600)	2
MCC25-08io1B	25	800	2	MCC95-12(16)io8B	95	1200(1600)	2
MCC25-12(14)io8B	25	1200(1400)	2	MCC95-14(18)io1B	95	1400(1800)	2
MCC26-08(14)io1B	26	800(1400)	2	MCC132-08(14)io1B	132	800(1400)	2
MCC26-08io8B	26	800	2	MCC132-12(16)io1B	132	1200(1600)	2
MCC26-12(16)io1B	26	1200(1600)	2	MCC161-20(22)io1B	161	2000(2200)	2
MCC26-12(16)io8B	26	1200(1600)	2	MCC162-08(18)io1B	162	800(1800)	2
MCC40-08i08B	40	800	2	MCC162-12(16)io1B	162	1200(1600)	2
MCC40-12(16)i08B	40	1200(1600)	2	MCC162-14io1(io8)B	162	1400	2
MCC44-08(14)io1B	44	800(1400)	2	MCC170-12(16)io1B	170	1200(1600)	2
MCC44-12(16)io1B	44	1200(1600)	2	MCC220-12(16)io1B	220	1200(1600)	2
MCC44-12(16)io8B	44	1200(1600)	2	MCC250-12(16)io1B	250	1200(1600)	2
MCC55-06(12)io8B	55	600(1200)	2	MCC255-12(16)io1B	255	1200(1600)	2
MCC55-08io1B	55	800	2	MCC255-14(18)io1B	255	1400(1800)	2
MCC56-08io1(io8)B	56	800	2	MCC310-12(16)io1B	310	1200(1600)	2
MCC56-12io1(io8)B	56	1200	2	MCC312-12(16)io1B	312	1200(1600)	2
MCC56-14io1(io8)B	56	1400	2	MCC501-16io1B	501	1600	2
MCC56-16io1(io8)B	56	1600	2	MCO450-16(20)io1B	450	1600(2000)	1
MCC56-18io1(io8)B	56	1800	2	MCO500-12(16)io1B	500	1200(1600)	1
MCC60-16io1B	60	1600	2	MCO600-12(16)io1B	600	1200(1600)	1
MCD26-12(16)io1B	26	1200(1600)	2	MCD56-16io1(io8)B	56	1600	2
MCD44-12(16)io1B	44	1200(1600)	2	MCD56-18io1(io8)B	56	1800	2
MCD56-08io1(io8)B	56	800	2	MCD72-08io8B	72	800	2
MCD56-12io1(io8)B	56	1200	2	MCD72-12(16)io1B	72	1200(1600)	2
MCD56-14io1(io8)B	56	1400	2	MCD90-08io8B	90	800	2

IXYS Thyristor Modules

Parameters

Model	Current (A)	Voltage (V)	Unit (U)		Model	Current (A)	Voltage (V)	Unit (U)	
MCD95-08io8B	95	800		2	MCD220-12(16)io1B	220	1200(1600)		2
MCD95-12(16)io1B	95	1200(1600)		2	MCD224-20(22)io1B	224	2000(2200)		2
MCD95-12(16)io8B	95	1200(1600)		2	MCD225-12(16)io1B	224	1200(1600)		2
MCD95-14(18)io1B	132	1400(1800)		2	MCD225-14(18)io1B	224	1400(1800)		2
MCD132-08(14)io1B	132	800(1400)		2	MCD250-12(16)io1B	250	1200(1600)		2
MCD132-12(16)io1B	161	1200(1600)		2	MCD255-12(16)io1B	255	1200(1600)		2
MCD161-20(22)io1B	162	2000(2200)		2	MCD255-14(18)io1B	255	1400(1800)		2
MCD162-08io1B	162	800		2	MCD310-16io1B	310	1600		2
MCD162-12(16)io1B	162	1200(1600)		2	MCD312-12(16)io1B	312	1200(1600)		2
MCD162-14(18)io1B	162	1400(1800)		2	MCD500-14io1B	500	1400		2
MCD220-08(14)io1B	220	800(1400)		2					
MCC26-12(16)io1B	26	1200(1600)		2	MCC162-12(16)io1B	162	1200(1600)		2
MCC44-12(16)io1B	44	1200(1600)		2	MCC170-12(16)io1B	170	1200(1600)		2
MCC56-12(16)io1B	56	1200(1600)		2	MCC220-12(16)io1B	220	1200(1600)		2
MCC72-12(16)io1B	72	1200(1600)		2	MCC250-12(16)io1B	250	1200(1600)		2
MCC95-12(16)io1B	95	1200(1600)		2	MCC312-12(16)io1B	312	1200(1600)		2
MCC132-12(16)io1B	132	1200(1600)		2					







NIEC Thyristor Modules



Thyristor / Diode Modules

Features


- Isolated Base
- Dual Thyristors or Thyristor and Diode Cascaded Circuit
- High Surge Capability

Application


- Rectified For General Use
- VVVF and ServoMotor Drive Amplifier

Schematic

PDT



PDH



PCH



Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
PDT308	30	800	2	PDT10012	100	1200	2
PDT3012	30	1200	2	PDT10016	100	1600	2
PDT3016	30	1600	2	PDT1508	150	800	2
PDT608	60	800	2	PDT15012	150	1200	2
PDT6012	60	1200	2	PDT15016	150	1600	2
PDT6016	60	1600	2	PDT2008	200	800	2
PDT1008	100	800	2	PHT2508CH	250	800	2
PDH308	30	800	2	PCH308	30	800	2
PDH3012(16)	30	1200(1600)	2	PCH3012(16)	30	1200(1600)	2
PDH608	60	800	2	PCH608	60	800	2
PDH6012(16)	60	1200(1600)	2	PCH6012(16)	60	1200(1600)	2
PDH1008	100	800	2	PCH1008	100	800	2
PDH10012(16)	100	1200(1600)	2	PCH10012(16)	100	1200(1600)	2
PDH1508	150	800	2	PCH1508	150	800	2
PDH15012(16)	150	1200(1600)	2	PCH15012(16)	150	1200(1600)	2
PDH2008(12)	200	800	2	PCH2008(12)	200	800	2
PGH5F308A	30	800		PGH10016AM	100	1600	
PGH3016AM	30	1600		PGH2008AM	200	800	
PGH758M	75	800		PGH20016AM	200	1600	
PGH5016AM	50	1600		PGH1008CF	100	800	
PGH7516AM	75	1600		PGH1008CM	100	800	
PVC75-08	75	800		PVC76-08(16)	76	800(1600)	
PVC75-16	75	1600		PVC116-16	116	1600	

TOSHIBA Thyristor Modules



Thyristor / Diode Modules

Features

- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability

Application

- DC motor control (e.g. for machine tools)
- Temperature control (e.g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)

Schematic

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
MSG60L41	60	800	2	MSG100L41A	100	800	2
MSG60L41A	60	800	2	MSG100L43	100	800	2
MSG60L43	60	800	2	MSG160L2G41	160	800	2
MSG100L2G41	100	800	2	MSG180L41	180	800	2
MSG100L41	100	800	2	MSG180L41A	180	800	2
MSG60Q41	60	1200	2	MSG160Q41	160	1200	2
MSG60U41A	60	1600	2	MSG160U41A	160	1600	2
MSG60U43	60	1600	2	MSG160U43	160	1600	2
MSG100Q41	100	1200	2	MSG180G41	180	500	2
MSG100Q43	100	1200	2	MSG180J41	180	600	2
MSG100U41A	100	1600	2	MSG180J43	180	600	2
MSG100U43	100	1600	2	MSG180U43	180	1600	2



CATELEC Thyristor Modules



Thyristor / Diode Modules

Features

- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability

Application

- DC motor control (e.g. for machine tools)
- Temperature control (e.g. for ovens, chemical processes)
- Professional light dimming (studios, theaters)

Schematic

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
CTT27-12(16)	27	1200(1600)	2	CTT130-12(16)	130	1200(1600)	2
CTT49-12(16)	49	1200(1600)	2	CTT181-12(16)	181	1200(1600)	2
CTT60-12(16)	60	1200(1600)	2	CTT250-12(16)	250	1200(1600)	2
CTT90-12(16)	90	1200(1600)	2	CTT320-12(16)	320	1200(1600)	2
CTT116-12(16)	116	1200(1600)	2	CTT500-16(18)	500	1600(1800)	2
CTD27-12(16)	27	1200(1600)	2	CTD130-12(16)	130	1200(1600)	2
CTD49-12(16)	49	1200(1600)	2	CTD181-12(16)	181	1200(1600)	2
CTD60-12(16)	60	1200(1600)	2	CTD250-12(16)	250	1200(1600)	2
CTD90-12(16)	90	1200(1600)	2	CTD320-12(16)	320	1200(1600)	2
CTD116-12(16)	116	1200(1600)	2	CTD500-16(18)	500	1600(1800)	2
CDT27-12(16)	27	1200(1600)	2	CDT130-12(16)	130	1200(1600)	2
CDT49-12(16)	49	1200(1600)	2	CDT181-12(16)	181	1200(1600)	2
CDT60-12(16)	60	1200(1600)	2	CDT250-12(16)	250	1200(1600)	2
CDT90-12(16)	90	1200(1600)	2	CDT320-12(16)	320	1200(1600)	2
CDT116-12(16)	116	1200(1600)	2	CDT500-16(18)	500	1600(1800)	2







MITSUBISHI Bridge Rectifiers Module



HIGH VOLTAGE HIGH POWER GENERAL USE
HIGH POWER GENERAL USE
INSULATED TYPE


Features

- IO DC output current
- VRRM Repetitive peak reverse voltage
- 3 phase bridge
- Insulated Type


Application

- AC motor controllers
- DC motor controllers
- Battery DC power supplies
- DC power supplies for control panels
- and other general DC power equipment

Schematic



1U 2U



3U

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
RM10TA-M(H)	10	800	6	RM30TB-M(H)	30	400(800)	6
RM10TNA-H	10	400(800)	6	RM30TPM-M(H)	30	400(800)	6
RM15TA-M(H)	15	400(800)	6	RM30TNA-H	30	800	6
RM20TPM-M(H)	15	400(800)	6	RM50TC-M(H)	50	400(800)	6
RM20TNA-H	20	800	6	RM75TC-M(H)	75	400(800)	6
RM30TA-M(H)	30	400(800)	6	RM75TPM-M(H)	75	400(800)	6
RM10TA-24(2H)	10	1200(1600)	6	RM25TN-2H	25	1600	6
RM10TN-2H	10	1600	6	RM30TC-24(2H)	30	1200(1600)	6
RM15TA-24(2H)	15	1200(1600)	6	RM30TC-40	30	2000	6
RM15TC-40	15	2000)	6	RM50TA-24(2H)	50	1200(1600)	6
RM20TA-24(2H)	20	1200(1600)	6	RM75TC-24(2H)	75	1200(1600)	6
RM20TPM-24(2H)	20	1200(1600)	6				





FUJI Bridge Rectifiers Module



POWER DIODE MODULE
INSULATED TYPE


Features

- All the terminals and the mounting plate are electrically isolated. These modules can be installed in the same cooling fin as other modules, thus saving installation space-a cost-effective feature.
- The diode chips are coated with a glass of zinc oxide, making them highly resistant to temperature and humidity variation.
- 6 diode chips are connected to the 3-phase bridge rectifying circuit inside the module-a cost-effective feature.
- Compact Package
- P.C. Board Mount Module
- Converter Diode Bridge

Application

- Inverters for AC motors
- Inverter for motor Drive
- Power supply units for DC motors
- DC power supply units for battery chargers
- General purpose DC power supply units
- Uninterruptible Power Supply
- AC and DC Servo Drive Amplifier

Schematic

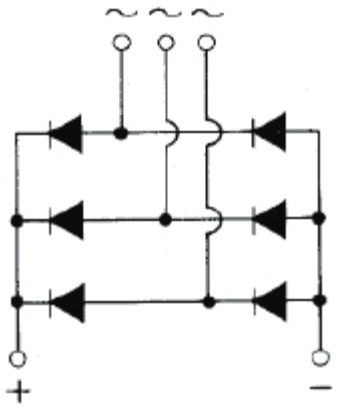

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
6RI30A-060(080)	30	600(800)	6	6RI50T-080	50	800	6
6RI30B-060(080)	30	600(800)	6	6RI75E-060(080)	75	600(800)	6
6RI30E-060(080)	30	600(800)	6	6RI75G-080	75	800	6
6RI30E-080Y	30	800	6	6RI100E-060	100	600	6
6RI30F-080	30	800	6	6RI100E-080(080B)	100	800	6
6RI30T-080	30	800	6	6RI150E-080	150	800	6
6RI50A-060	50	600	6	6R1TI30Y-080	30	800	6
6RI50E-060(080)	50	600(800)	6				
6RI30G-120	30	1200	6	6RI75G-160(160B)	75	1600	6
6RI50G-160	50	1600	6	6RI75P-160	75	1600	6
6RI50P-160	50	1600	6	6RI100G-120B	100	1200	6
6RI75G-120	75	1200	6	6RI100P-160	100	1600	6

SEMIKRON Bridge Rectifiers Module



Power Bridge Rectifiers

Features


- Isolated metal case with screw terminals
- Blocking voltage up to 1600V
- High surge current
- Easy chassis mounting
- Robust plastic case with screw terminals
- Large,isolated base plate

Application

- Three phase rectifiers for power supplies
- Input rectifiers for variable frequency drives
- Rectifiers for DC motor field supplies
- Battery charger rectifiers
- Recommended snubber network:

RC:0.1uF,50Ω(PR=1W)

Schematic



SKD

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
SKB25/12(16)	20	1200(1600)		SKB50/04(08)	50	400(800)	
SKB30/02	30	200		SKB50/12(16)A3	50	1200(1600)	
SKB30/04A1	30	400		SKB60/04(08)	60	400(800)	
SKB30/08	30	800		SKB60/14(16)	60	400(800)	
SKB30/12(16)	30	1200(1600)		SKB60/12	60	1200	
SKB30/12(16)A1	30	1200(1600)		SKB72/14(16)	72	1400(1600)	
SKD25/02	20	200	6	SKD53/12(16)	53	1200(1600)	6
SKD25/12(16)	20	1200(1600)	6	SKD60/04(08)	60	400(800)	6
SKD25/14	20	1400	6	SKD60/12(16)	60	1200(1600)	6
SKD30/04(08)	30	400(800)	6	SKD62/12(16)	60	1200(1600)	6
SKD30/04(08)A1	30	400(800)	6	SKD62/14	60	1400	6
SKD30/12(16)	30	1200(1600)	6	SKD82/08	80	800	6
SKD30/12(16)A1	30	1200(1600)	6	SKD82/12(16)	80	1200(1600)	6
SKD31/12(16)	30	1200(1600)	6	SKD83/12(16)	83	1200(1600)	6
SKD31F/16	30	1600	6	SKD100/04(08)	83	400(800)	6
SKD31F/22	30	2200	6	SKD100/12(16)	100	1200(1600)	6
SKD33/12(16)	33	1200(1600)	6	SKD110/12(16)	110	1200(1600)	6
SKD40/08	440	800	6	SKD115/16	110	1600	6
SKD50/04(08)	50	400(800)	6	SKD145/16	140	1600	6
SKD50/04(08)A3	50	400(800)	6	SKD146/16-100	140	1600	6
SKD50/12(16)	50	1200(1600)	6	SKD146/16-L100	140	1600	6
SKD50/12(16)A3	50	1200(1600)	6	SKD160/12(16)	160	1200(1600)	6
SKD50DB060D	50	600	6	SKD210/16	210	1600	6
SKD51/08	50	800	6				
SKD51/12(16)	50	1200(1600)	6				

IXYS Bridge Rectifiers Module



Three Phase Rectifier Bridge


Features

- Package with DCB ceramic base plate
- Package with screw terminals
- Isolation voltage 3600 V~
- Planar passivated chips
- Blocking voltage up to 1800 V
- Low forward voltage drop

Application

- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Rectifier for DC motors field current
- Field supply for DC motors

Schematic



VUO

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
VUO16-12(16)NO1	20	1200(1600)	6	VUO52-12(16)NO1	55	1200(1600)	6
VUO22-12(16)NO1	25	1200(1600)	6	VUO52-16	43	1600	6
VUO22-16	25	1600	6	VUO55-12(16)NO7	58	1200(1600)	6
VUO25-12(16)NO8	25	1200(1600)	6	VUO60-12(16)NO3	75	1200(1600)	6
VUO28-06NO7	28	600	6	VUO60-14NO3	75	1400	6
VUO30-12(16)NO3	30	1200(1600)	6	VUO62-12(16)NO7	63	1200(1600)	6
VUO30-14NO3	30	1400	6	VUO70-12(16)NO7	70	1200(1600)	6
VUO34-12(16)NO1	37	1200(1600)	6	VUO80-12(16)NO1	82	1200(1600)	6
VUO34-18NO1	37	1800	6	VUO82-12(16)NO7	88	1200(1600)	6
VUO35-12	38	1200	6	VUO82-18NO7	88	1800	6
VUO35-12(16)NO7	38	1200(1600)	6	VUO85-12(16)NO7	85	1200(1600)	6
VUO35-14NO7	38	1400	6	VUO105-12(16)NO7	140	1200(1600)	6
VUO36-12	35	1200	6	VUO110-12(16)NO7	127	1200(1600)	6
VUO36-12(16)NO8	35	1200(1600)	6	VUO121-16NO1	118	1600	6
VUO36-16	35	1600	6	VUO125-12(16)NO7	166	1200(1600)	6
VUO36-16NO3	35	1600	6	VUO160-12(16)NO7	175	1200(1600)	6
VUO36-16NO7	35	1600	6	VUO190-12(16)NO7	248	1200(1600)	6
VUO50-12(16)NO3	58	1200(1600)	6	VUO200-16NO7	200	1600	6
VUO50-16	58	1600	6	VUO250-16NO7	250	1600	6
VUO50-18NO3	58	1800	6				
VUB50-12PO1	56	1200		VUB145-16NO1	145	1600	
VUB72-12(16)NO1	110	1200(1600)		VUB160-12(16)NO2	188	1200(1600)	
VUB116-16NO1	116	1600			145		
VUB120-12(16)NO1	188	1200(1600)		VUM24-05N	35	500	
VUB135-22 NO1	135	2200		VUM85-05A	94	500	

POWERSEM Bridge Rectifiers Module



Three Phase Rectifier Bridges


Features

- Package with ¼ " fast-on terminals
- Isolation voltage 3000 V·
- Planar glasspassivated chips
- Blocking voltage up to 1800 V
- Low forward voltage drop

Application

- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

Schematic

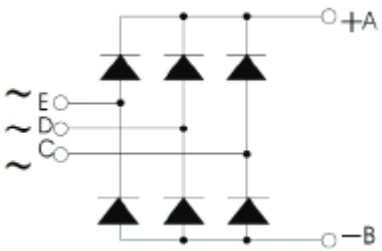

Parameters

Model	Current (A)	Voltage (V)	Tc (℃)	Model	Current (A)	Voltage (V)	Tc (℃)
PSD36/08	35	800	62	PSD92/16	110	1600	110
PSD36/12	35	1200	62	PSD92/18	110	1800	110
PSD36/14	35	1400	62	PSD112/08	120	800	110
PSD36/16	35	1600	62	PSD112/12	120	1200	110
PSD36/18	35	1800	62	PSD112/14	120	1400	110
PSD62/08	63	800	110	PSD112/16	120	1600	110
PSD62/12	63	1200	110	PSD112/18	120	1800	110
PSD62/14	63	1400	110	PSD125/08	130	800	110
PSD62/16	63	1600	110	PSD125/12	130	1200	110
PSD62/18	63	1800	110	PSD125/14	130	1400	110
PSD82/08	85	800	110	PSD125/18	130	1600	110
PSD82/12	85	1200	110	PSD125/18	130	1800	110
PSD82/14	85	1400	110	PSD162/08	175	800	110
PSD82/16	85	1600	110	PSD162/12	175	1200	110
PSD82/18	85	1800	110	PSD162/14	175	1400	110
PSD83/08	100	800	110	PSD162/16	175	1600	110
PSD83/12	100	1200	110	PSD162/18	175	1800	110
PSD83/14	100	1400	110	PSD192/08	248	800	110
PSD83/16	100	1600	110	PSD192/12	248	1200	110
PSD83/18	100	1800	110	PSD192/14	248	1400	110
PSD92/08	110	800	110	PSD192/16	248	1600	110
PSD92/12	110	1200	110	PSD192/18	248	1800	110
PSD92/14	110	1400	110	D4R50F160C	50	1600	110


SanRex Bridge Rectifiers Module



DIODE
(THREE PHASES BRIDGE TYPE)

Features
- Isolated mounting base
- High reliability by unique glass passivation

Application
- AC, DC Motor Drive
- AVR
- Switching

Schematic


Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
DF20AA(CA)80	20	800	6	DF60LA(LB)80	60	800	6
DF20BA60(80)	20	600(800)	6	DF75AA(BA)80	75	800	6
DF20DB80	20	800	6	DF75LA(LB)80	75	800	6
DF30AA(BA)80	30	800	6	DF100AA(BA)80	100	800	6
DF30CA(DB)80	30	800	6	DF100LA(LB)80	100	800	6
DF40AA(BA)80	40	800	6	DF150AA(BA)80	150	800	6
DF50AA(BA)80	50	800	6	DF200AA(BA)80	200	800	6
DF60AA(BA)80	60	800	6	DFA200AA80	200	800	6
DF20AA120(160)	20	1200(1600)	6	DF75AA120(160)	75	1200(1600)	6
DF20BA(CA)160	20	1600	6	DF75BA160	75	1600	6
DF20DB160	20	1600	6	DF75LA(LB)160	75	1600	6
DF30AA120(160)	30	1200(1600)	6	DF100AA120(160)	100	1200(1600)	6
DF30AC(BA)160	30	1600	6	DF100BA160	100	1600	6
DF30CA120(160)	30	1200(1600)	6	DF100LA(LB)160	100	1600	6
DF30DB160	30	1600	6	DF150AA120(160)	150	1200(16000	6
DF40AA120(160)	40	1200(1600)	6	DF150BA160	150	1600	6
DF40BA160	40	1600	6	DF200AA120(160)	200	1200(1600)	6
DF50AA120(160)	50	1200(1600)	6	DFA20AA160	20	1600	
DF50BA160	50	1600	6	DFA75BA160	75	1600	
DF60AA120(160)	60	1200(1600)	6	DFA100AA(BA)120	100	1200	
DF60BA160	60	1600	6	DFA150AA160	150	1600	
DF60LA(LB)160	60	1600	6	DFA200AA120(160)	200	1200(1600)	
CVM25CC80	25	800		CVM180BB80	180	800	
CVM30AA80	30	800		CVM25CC160	25	1600	
CVM40BB(CD)80	40	800		CVM40BB(CD)160	40	1600	
CVM50CC80	50	800		CVM50BB160	50	1600	
CVM60AA80	60	800		CVM75AA(BB)160	75	1600	
CVM75AA(BB)80	75	800		CVM100AA(BB)160	100	1600	
CVM75CD80	75	800		CVM150BB120(160)	150	1200(1600)	
CVM100BB80	100	800		CVM200BB120	200	1200	
CLK70AA160	70	1600		CLK150AA60	150	600	
CLK100AA160	100	1600		CLK180AA80	180	800	
CLK120AA80	120	800		CLF150AA60	150	600	

TOSHIBA Bridge Rectifiers Module



TOSHIBA RECTIFIER MODULE
SILICON DIFFUSED TYPE

Features

- Single in-line Package
- Easy to mount
- Space and weight savings
- Improved temperature and power cycling

Application

- Three phase full wave bridge applications
- Inverter equipment for AC motor control
- Chopper equipment for DC motor control
- DC supply for battery
- Other power conversion equipment

Schematic

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
20L6P45	20	800	6	75G6P43	75	600	6
30L6P45/42	30	800	6	75L6P43	75	800	6
30L6P41	30	800	6	75J6P41	75	1000	6
30J6P41	30	1000	6	75Q6P43	75	1200	6
30Q6P42/45	30	1200	6	75U6P43	75	1600	6
50G6P43	30	1600	6	100G6P43	100	600	6
50L6P43	50	600	6	100L6P43	100	800	6
50Q6P43	50	800	6	100Q6P43(41)	100	1200	6
50U6P43	50	1200	6	100U6P43(41)	100	1600	6
	50	1600	6				

IR Bridge Rectifiers Module



MB-SINGLE PHASE BRIDGE
MT-THREE PHASE BRIDGE


Features

- Universal, 3 way terminals:push-on, wrap around or solder
- High thermal conductivity package,electrically insulated case
- Center hole fixing
- Excellent power/volume ratio
- Outstanding number of power encapsulated components

Application

- AC motor controllers
- DC motor controllers
- Battery DC power supplies
- DC power supplies for control panels
- and other general DC power equipment

Schematic

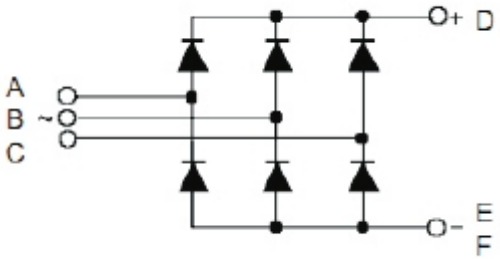

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
36MT120(160)KB	36	1200(1600)		73MT120(160)KB	70	1200(1600)	
51MT120(160)KB	55	1200(1600)		90MT120(160)KB	90	1200(1600)	
51MT120(160)PB	55	1200(1600)		91MT120(160)KB	90	1200(1600)	
52MT120(160)KB	55	1200(1600)		92MT120(160)KB	90	1200(1600)	
53MT120(160)KB	55	1200(1600)		93MT120(160)KB	90	1200(1600)	
60MT120(160)KB	60	1200(1600)		110MT120(160)KB	110	1200(1600)	
61MT120(160)KB	60	1200(1600)		111MT120(160)KB	110	1200(1600)	
62MT120(160)KB	60	1200(1600)		112MT120(160)KB	110	1200(1600)	
63MT120(160)KB	60	1200(1600)		113MT120(160)KB	110	1200(1600)	
70MT120(160)KB	70	1200(1600)		130MT120(160)KB	130	1200(1600)	
71MT120(160)KB	70	1200(1600)		160MT120(160)KB	160	1200(1600)	
72MT120(160)KB	70	1200(1600)		36MB120A	36	1200	







EUPEC Bridge Rectifiers Module



INSULATED TYPE


Features

- IO DC output current
- VRRM Repetitive peak reverse voltage
- 3 phase bridge
- Insulated Type

Application

- AC motor controllers
- DC motor controllers
- Battery DC power supplies
- DC power supplies for control panels
- and other general DC power equipment

Schematic

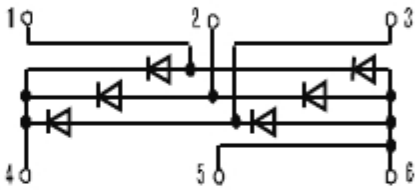

DDB6U

Parameters

Model	Current (A)	Voltage (V)	Unit (U)		Model	Current (A)	Voltage (V)	Unit (U)
DDB6U60N12K14F9	60	1200	6		DDB6U134N16RR	134	1600	7
DDB6U84N12(16)R	84	1200	6		DDB6U144N12(16)R	144	1200	6
DDB6U84N12(16)RR	84	1200	7		DDB6U144N16RR	44	1600	7
DDB6U85N12(16)R	85	1200	6		DDB6U145N12(16)R	145	1200	6
DDB6U85N16L	85	1600	6		DDB6U145N16L	145	1600	6
DDB6U100N12(16)R	100	1200	6		DDB6U205N12(16)L	205	1200	6
DDB6U100N12(16)RR	100	1200	7		DDB6U205N12(16)R	205	1200	6
DDB6U104N16RR	104	1600	7		DDB6U215N16L	215	1600	6
DDB6U130N12K	130	1200	6					







MITSUBISHI DIODE MODULES



HIGH SPEED SWITCHING USE
HIGH POWER GENERAL USE
INSULATED TYPE

Features

- DOUBLE ARMS
- Insulated Type

Application


- AC motor controllers
- DC motor controllers
- Battery DC power supplies
- DC power supplies for control panels
- and other general DC power equipment

Schematic


1U



2U



3U



Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
RM30CZ-M(H)	30	400(800)	2	RM150UZ-M(H)	150	400(800)	2
RM30DZ-M(H)	30	400(800)	2	RM250CZ-M(H)	250	400(800)	2
RM60CZ-M(H)	60	400(800)	2	RM250DZ-M(H)	250	400(800)	2
RM60DZ-M(H)	60	400(800)	2	RM250UZ-M(H)	250	400(800)	2
RM100CZ-M(H)	100	400(800)	2	RM500DZ-M(H)	500	400(800)	2
RM100DZ-M(H)	100	400(800)	2	RM500UZ-M(H)	500	400(800)	2
RM150CZ-M(H)	150	400(800)	2				
RM150DZ-M(H)	150	400(800)		RM500HA-M(H)	500	400(800)	1
RM30CZ-24(2H)	30	1200(1600)	2	RM150UZ-24(2H)	500	1200(1600)	2
RM30DZ-24(2H)	30	1200(1600)	2	RM250CZ-24(2H)	250	1200(1600)	2
RM60CZ-24(2H)	60	1200(1600)	2	RM250DZ-24(2H)	250	1200(1600)	2
RM60DZ-24(2H)	60	1200(1600)	2	RM250UZ-24(2H)	500	1200(1600)	2
RM100CZ-24(2H)	100	1200(1600)	2	RM500DZ-24(2H)	500	1200(1600)	2
RM100DZ-24(2H)	100	1200(1600)	2	RM500UZ-24(2H)	500	1200(1600)	2
RM150CZ-24(2H)	150	1200(1600)	2				
RM150DZ-24(2H)	150	1200(1600)	2	RM500HA-24(2H)	500	1200(1600)	1
FAST RECOVERY DIODE MODULES							
RM20HA-12(20/24)F	20	600	1	RM200HA-20(24)F	200	1000	1
RM25HG-24S	25	1200	1	RM250HA-10F	250	500	1
RM50HA-12(20/24)F	50	600	1	RM300HA-24F	300	1200	1
RM35HG-12(34)S	35	600	1	RM450HA-5H	450	250	1
RM100HA-12(20/24)F	100	600	1	RM400HA-20(24)S	400	100	1
RM20CA-6(12)S	20	300	2	RM50CA-12(20/24)F	50	600	2
RM20CA-12(24)F	20	600	2	RM100CA-12(20/24)F	100	600	2
RM20DA-12(20/24)F	20	600	2	RM200DA-20(24)F	200	1000	2
RM20DA-12S	20	600	2	RM300CA-9W	300	450	2
RM50CA-6(12/20)S	50	300	2				

SanRex DIODE MODULES



DIODE MODULES


Features

- Isolated mounting base
- Two elements in a package for simple (single and three phase) bridge connections
- Highly reliable glass passivated chips
- High surge current capability

Application

- Various rectifiers
- Battery chargers
- DC motor drives

Schematic

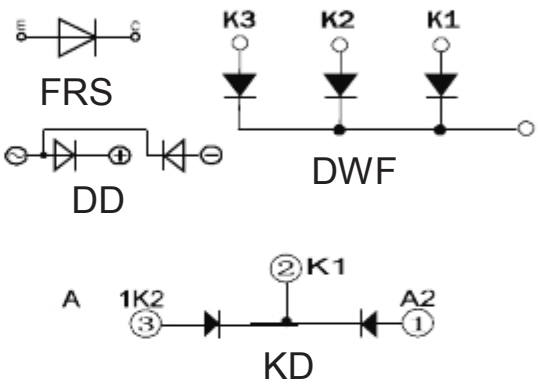

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
DD25F120(160)	25	1200(1600)	2	DD30HB(GB)120(160)	30	1200(1600)	2
DD40F120(160)	40	1200(1600)	2	DD60HB(GB)120(160)	60	1200(1600)	2
DD55F120(160)	55	1200(1600)	2	DD60KB120(160S)	60	1200(1600)	2
DD70F120(160)	70	1200(1600)	2	DD100KB120(160S)	100	1200(1600)	2
DD90F120(160)	90	1200(1600)	2	DD100HB(GB)120(160)	100	1200(1600)	2
DD110F120(160)	110	1200(1600)	2	DD200HB(GB)120(160)	200	1200(1600)	2
DD130F120(160)	130	1200(1600)	2	DD200KB160	200	1600	2
DD160F120(160)	160	1200(1600)	2	DD250HB(GB)120(160)	250	1200(1600)	2
MDF(MDR)100A50	100	500	1	MDF(MDR)200A50	200	500	1
MDF(MDR)150A50	150	500	1	MDF(MDR)250A50	250	500	1
FAST RECOVERY DIODE MODULES							
DG20AA60M	20	600	1	FRS300CA50	300	500	1
FRG25AA(BA)60	25	600	1	FRS400BA60	400	600	1
FRG25CA120	25	1200	1	FRS400CA(DA)120	400	1200	1
FRS150BA50	150	500	1	FRS400EA180(200)	400	1800(2000)	1
FRS200AA(BA)60	200	600	1	MDR(MDF)150A-40L(M)	150	400	1
FRS200CA100(120)	200	1000(1200)	1	MDR(MDF)250A-40L(M)	250	400	1
FRS300BA50	300	500	1	FRN300BA60	300	600	1
DD50GB60L(M)	50	600	2	FDS100CA100(120)	100	1000(1200)	2
FRD100AA(BA)60	100	600	2	FDF25CA100(120)	25	1000(1200)	2
FRD100CA100(120)	100	1000(1200)	2	FDF60BA60	30	600	2
FDS100AA(BA)60	100	600	2				

FUJI DIODE MODULES



POWER DIODE MODULE


Features

- All the terminals and the mounting plate are electrically isolated. These modules can be installed in the same cooling fin as other modules, thus saving installation space-a cost-effective feature.
- The diode chips are coated with a glass of zinc oxide, making them highly resistant to temperature and humidity variation.
- Tow diodes chips are connected in series internally, so allowing the rectifying circuit to be simplified.

Application

- Inverters for AC motors
- Power supply units for DC motors
- DC power supply units for battery chargers
- General purpose dc power supply units

Schematic



Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
2RI60(100)E-080	60	800	2	2RI60G-120(160)	60	1200(1600)	2
2RI150(250)E-080	150	800	2	2RI100G-120(160)	100	1200(1600)	2
RM100DZ-2H	100	1600	2	RM500HA-H	500	800	1
RM250DZ-2H	250	1600	2				
		FAST		DIODE MODULES			
ERA34-10	34	1000	1	2FI100A-060C(N/D)	100	600	2
1F60A-120F(R)	60	1200	1	2FI200A-060C(N/D)	200	600	2
1FI600A-120	600	1200	1	2FI50F-060C(N/D)	50	600	2
1FI600A-200	600	2000	1	2FI100F-060C(N/D)	100	600	2
1FI150B-060	150	600	1	2FI50G-060C(N/D)	50	600	2
1FI250B-060	250	600	1	2FI100G-060C(N/D)	100	600	2
2FI50A-060C(N/D)	50	600	2	2FI50A-060C(N/D)	50	600	2







EUPEC DIODE MODULES



DIODE MODULES


Features

- Isolated mounting base
- Two elements in a package for simple (single and three phase) bridge connections
- Highly reliable glass passivated chips
- High surge current capability

Application

- Various rectifiers
- Battery chargers
- DC motor drives

Schematic



DD


Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
DD31N12(16)	31	1200(1600)	2	DD171N12(16)	171	1200(1600)	2
DD55N12(16)	55	1200(1600)	2	DD230N12(16)	230	1200(1600)	2
DD76N12(16)	75	1200(1600)	2	DD260N12(16)	260	1200(1600)	2
DD90N12(16)	90	1200(1600)	2	DD285N80	285	800	2
DD106N12(16)	106	1200(1600)	2	DD350N12(16)	350	1200(1600)	2
DD151N12(16)	150	1200(1600)	2	DD600N12(16)	600	1200(1600)	2
FAST RECOVERY DIODE MODULES							
DD46S	100	800-1200	2	DD230S	200	1800-2600	2
DD61S	120	1000-1400	2	DD241S	200	1800-2600	2
DD62S	120	400-1000	2	DD242S	410	1000-1400	2
DD81S	150	1000-1400	2	Nd230S	410	1000-1400	2
DD82S	150	400-1000	2	Nd241S	410	600-1000	2
DD121S	200	1000-1400	2	ND242S	410	600-1000	2





SEMIKRON DIODE MODULES

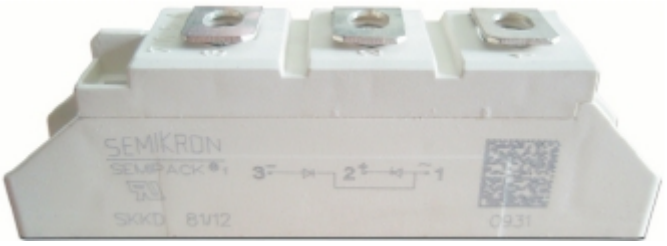

Rectifier Diode Modules


Features

- Heat transfer through aluminium oxide ceramic isolated metal baseplate
- Hard soldered joints for high reliability
- UL recognized,file no. E63532

Application

- Non-controllable rectifiers for AC/AC converters
- Line rectifiers for transistorized AC motor controllers
- Field supply for DC motors

Schematic

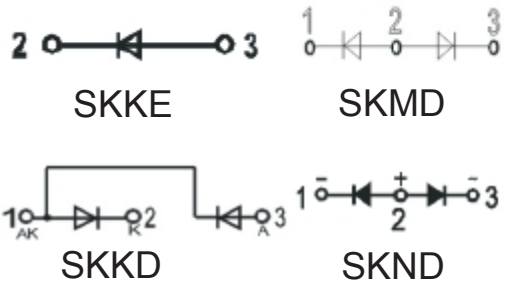

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
SKKD15/12(16)	15	1200(1600)	2	SKKD162/12(16)	100	1200(1600)	2
SKKD56/12(16)	56	1200(1600)	2	SKKD201/12(16)	200	1200(1600)	2
SKKD46/12(16)	46	1200(1600)	2	SKKD260/12(16)	260	1200(1600)	2
SKKD81/12(16)	81	1200(1600)	2	SKKD380/12(16)	380	1200(1600)	2
SKKD100/12(16)	100	1200(1600)	2	SKKD700/12(16)	700	1200(1600)	2
FAST RECOVERY DIODE MODULES							
SKKE120F16	120	1600	1	SKKE400F12(16)	400	1200(1600)	1
SKKE165M80	165	800	1	SKKE600F12(16)	600	1200(1600)	1
SKKE301F12(16)	300	1200(1600)	1	SKN60F12	60	1200	1
SKKE330F16	330	1600	1	SKR60F12	60	1200	1
SKKD42F12(16)	40	1200(1600)	2	SKMD42F	42	400-1000	2
SKKD50E/04	50	400	2	SKMD105F	105	800-1600	2
SKKD60F17	60	1700	2	SKMD150F	150	1200(1600)	2
SKKD75F12	75	1200	2	SKMD202E	200	200-300	2
SKKD90F16	90	1600	2	SKND42F	40	1000-500	2
SKKD105F12(16)	105	1200(1600)	2	SKND105F	105	800-1600	2
SKKD150F12(16)	150	1200(1600)	2	SKND150F	150	1200	2
SKKD170F12(16)	170	1200(1600)	2	SKND202E	202	200-300	2
SKKD160M08(16)	160	800(1600)	2	SKND205F	205	600	2

IXYS DIODE MODULES



Space and weight savings
Improved temperature and power cycling
Reduced protection circuits
Simple mounting

Features

- International standard package JEDEC TO-240 AA
- Direct copper bonded Al2O3 –ceramic base plate
- Planar passivated chips
- Isolation voltage 3600 V~
- UL registered, E 72873

Application

- Supplies for DC power equipment
- DC supply for PWM inverter
- Field supply for DC motors
- Battery DC power supplies

Schematic





Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
MEO550-02DA	582	200	1	MEA75-12DA	2*75	1200	2
MEO550-06DA	514	600	1	MEE75-12DA	75	2*1200	2
MEO450-12DA	453	1200	1	MEK95-06DA	2*95	600	2
MDD26-12(16)N1B	36	1200(1600)	2	MEA95-06DA	2*95	600	2
MDD44-12(16)N1B	59	1200(1600)	2	MEE95-06DA	95	2*600	2
MDD56-12(16)N1B	71	1200(1600)	2	MEK350-02DA	2*356	200	2
MDD72-12(16)N1B	99	1200(1600)	2	MEK350-06DA	2*304	600	2
MDD95-12(16)N1B	120	1200(1600)	2	MEK350-12DA	2*260	1200	2
MDD142-12(16)N1B	165	1200(1600)	2	MEE300-06DA	304	2*600	2
MDD172-12(16)N1B	190	1200(1600)	2	MEE250-12DA	260	2*1200	2
MDD220-12(16)N1B	270	1200(1600)	2	MEA300-06DA	2*304	600	2
MDD250-12(16)N1B	290	1200(1600)	2	MEA250-12DA	2*260	1200	2
MDD310-12(16)N1B	305	1200(1600)	2	MEK150-04DA	2*150	400	2
MEK75-12DA	2*75	1200	2	MEK600-04DA	2*575	400	2
		FAST		DIODE MODULES			
DSEI12-06A	14	600		DSEI2×61-10B	2x60	1000	
DSEI30-06A	37	600		DSEI2×31-10B	2x30	1000	
DSEI60-06A	60	600		DSEI12-12A	26	1200	
DSEI2×31-06C	2x30	600		DSEI30-12A	52	1200	
DSEI2×61-06C	2x60	600		DSEI60-12A	11	1200	
DSEI2×101-06A	2x96	600		DSEI30-12A	17	1200	
DSEI12-10A	12	1000		DSEI2×31-12B	2x28	1200	
DSEI30-10A	30	1000		DSEI2×61-12B	2x52	1200	
DSEI60-10A	60	1000		DSEI2×101-12A	2x91	1200	

MOTOROLA DIODE MODULES

FAST RECOVERY DIODE MODULES

Features

- Metal of siliconrectifier, majonty carrier conducton
- Guard ring for transient protection motors
- Low power loss high efficiency
- High surge capacity, High current battery capability

Application

- Inverters for AC motors
- Power supply units for DC
- DC power supply units for battery chargers
- General purpose dc power supply units

Schematic

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
MUR10020	100	200		MBR30045	300	45	
MUR20020	200	200		MBR400100	400	100	
MUR20040	200	400		CPT300100	300	100	
MUR30100	30	1000		CPT400100	400	100	



IR DIODE MODULES



DIODE MODULES


Features

- High Voltage
- Industrial Standard Package
- Thick Al metal die and double stick bonding
- Thick copper baseplate
- 3500VRMS isolating voltage

Application

- Up to 1600V
- Full compatible TO-240AA
- High Surge capability
- Easy Mounting on heatsink
- Al203 DBC insulator
- Heatsink grounded


Schematic

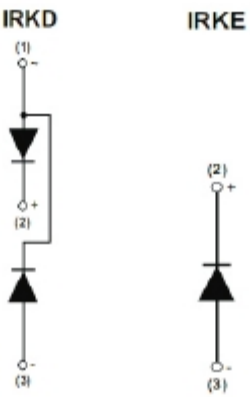

Parameters

Model	Current (A)	Voltage (V)	Unit (U)	Model	Current (A)	Voltage (V)	Unit (U)
IRKD26/12(16)	27	1200(1600)	2	IRKD166/12(16)	165	1200(1600)	2
IRKD56/12(16)	56	1200(1600)	2	IRKD196/12(16)	195	1200(1600)	2
IRKD71/12(16)	80	1200(1600)	2	IRKD250/12(16)	250	1200(1600)	2
IRKD91/12(16)	100	1200(1600)	2	IRKD320/12(16)	320	1200(1600)	2
IRKD105/12(16)	116	1200(1600)	2	IRKD600/12(16)	600	1200(1600)	2
IRKE26/12(16)	27	1200(1600)	2	IRKE166/12(16)	165	1200(1600)	2
IRKE56/12(16)	56	1200(1600)	2	IRKE196/12(16)	195	1200(1600)	2
IRKE71/12(16)	80	1200(1600)	2	IRKE250/12(16)	250	1200(1600)	2
IRKE91/12(16)	100	1200(1600)	2	IRKE320/12(16)	320	1200(1600)	2
IRKE105/12(16)	116	1200(1600)	2	IRKE600/12(16)	600	1200(1600)	2
FAST RECOVERY DIODE MODULES							
HFA100MD60C	2*100	600		HFA210NJ60C	2*210	600	
HFA180MD60C	2*180	600		HFA280NJ60	2*280	600	
HFA140NJ40C	2*140	400		HFA240NJ40C(D)	2*240	400	
HFA140NJ60C	2*140	600		HFA320NJ40C(D)	2*320	400	



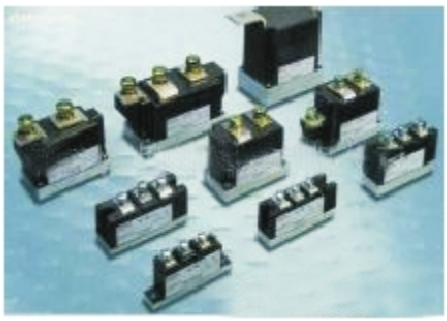


SCR in Diode









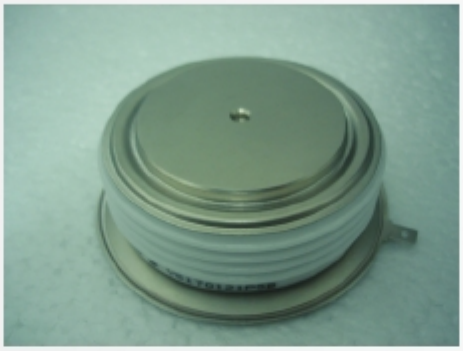






















ABB

SCR and Diodes

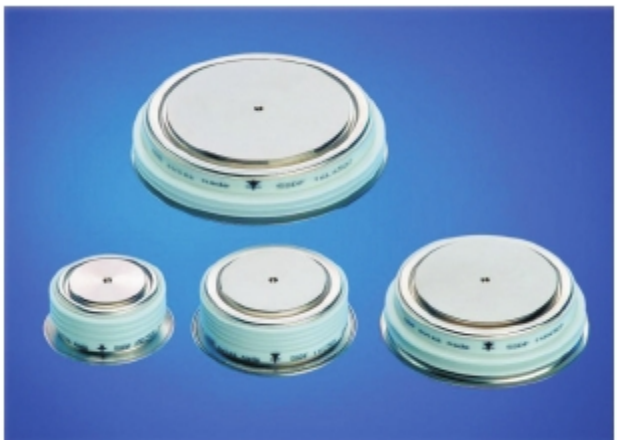

►Application

- DC motor controls
- Controlled DC power supplies
- AC switch and thermal control
- Synchronous motor excitation Related Products

►Features

- Patented free-floating silicon technology
- Low on-state and switching losses
- Annular gate electrode
- Industry standard housing
- Cosmic radiation withstand rating



►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
5SDD33L5500	5500	3480	Φ120.26	5STP04D4600	4600	470	Φ58.26
5SDD33M5500	5500	3480	Φ120.26	5STP04D5000	5000	470	Φ58.26
5SDD40B0200	200	6130	Φ62.8	5STP04D5200	5200	470	Φ58.26
5SDD71B0200	200	7110	Φ62.8	5STP06D2200	2200	620	Φ58.26
5SDD71X0200	200	7110	Φ60.8	5STP06D2600	2600	620	Φ58.26
5SDD71X0400	400	7110	Φ60.8	5STP06D2800	2800	620	Φ58.26
5SDD0120C0200	200	11000	Φ75.8	5STP06E1600	1600	620	Φ58.26
5SDD0120C0400	400	11350	Φ75.8	5STP07D1200	1200	730	Φ58.26
				5STP07D1600	1600	730	Φ58.26
5SGA06D4502	4500	600	Φ60.26	5STP07D1800	1800	730	Φ58.26
5SGA15F2502	2500	1500	Φ75.26	5STP08D2401	2400	793	Φ60.26
5SGA20H2501	2500	2000	Φ93.26	5STP08D2601	2600	793	Φ60.26
5SGA20H4502	4500	2000	Φ93.26	5STP08D2801	2800	793	Φ60.26
5SGA25H2501	2500	2500	Φ93.26	5STP08G5800	5800	793	Φ75.35
5SGA30J2501	2500	3000	Φ108.26	5STP08G6200	6200	793	Φ75.35
5SGA30J4502	4500	3000	Φ108.26	5STP08G6500	6500	760	Φ75.35
5SGA40H4501	4500	4000	Φ120.26	5STP09D1401	1400	932	Φ60.26
				5STP09D1601	1600	932	Φ60.26
5STP03A1800	1800	350	Φ60.35	5STP09D1801	1800	932	Φ60.26
5STP03D5800	5800	350	Φ60.35	5STP09D2001	2000	862	Φ60.26
5STP03D6200	6200	350	Φ60.35	5STP09D2201	2200	862	Φ60.26
5STP03D6500	6500	350	Φ60.35	5STP10D1201	1200	969	Φ60.26
5STP03X5800	5800	350	Φ75.26	5STP10D1401	1400	969	Φ60.26
5STP03X6200	6200	350	Φ75.26	5STP10D1601	1600	969	Φ60.26
5STP03X6500	6500	350	Φ75.26	5STP12F3600	1200	1150	Φ75.26
5STP04D3600	3600	470	Φ58.26	5STP12F4000	1400	1150	Φ75.26
5STP04D4000	4000	470	Φ58.26	5STP12F4200	4200	1150	Φ75.26
5STP04D4200	4200	470	Φ58.26	5STP12K5800	5800	1370	Φ102.35

ABB

►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
5STP12K6200	6200	1370	Φ102.35	5STP30H1601	1600	3108	Φ101.26
5STP12K6500	6500	1370	Φ102.35	5STP30H1801	1800	3108	Φ101.26
5STP12M5800	5800	1200	Φ102.35	5STP33L2200	2200	3740	Φ120.26
5STP12M6200	6200	1200	Φ102.35	5STP33L2600	2600	3740	Φ120.26
5STP12M6500	6500	1200	Φ102.35	5STP33L2800	2800	3740	Φ120.26
5STP12N7800	7800	1200	Φ150.35	5STP33L5500	5500	3740	Φ120.26
5STP12N8200	8200	1200	Φ150.35	5STP34H1201	1200	3370	Φ101.26
5STP12N8500	8500	1200	Φ150.35	5STP34H1401	1400	3370	Φ101.26
5STP16F2200	2200	1400	Φ75.26	5STP34H1601	1600	3370	Φ101.26
5STP16F2401	2400	1512	Φ75.26	5STP34N4600	4600	3600	Φ150.35
5STP16F2600	2600	1400	Φ75.26	5STP34N5000	5000	3600	Φ150.35
5STP16F2601	2600	1512	Φ75.26	5STP34N5200	5200	3600	Φ150.35
5STP16F2800	2800	1400	Φ75.26	5STP34Q4600	4600	3875	Φ151.26
5STP16F2801	2800	1512	Φ75.26	5STP34Q5000	5000	3875	Φ151.26
5STP17F1801	1800	1702	Φ75.26	5STP34Q5200	5200	3875	Φ151.26
5STP17F2001	2000	1702	Φ75.26	5STP38N3600	3600	3960	Φ150.35
5STP17F2201	2200	1702	Φ75.26	5STP38N4000	4000	3960	Φ150.35
5STP17H4600	4600	1975	Φ101.26	5STP38N4200	4200	3960	Φ150.35
5STP17H5000	5000	1975	Φ101.26	5STP38Q3600	3600	4275	Φ151.26
5STP17H5200	5200	1975	Φ101.26	5STP38Q4000	4000	4275	Φ151.26
5STP18F1200	1200	1600	Φ75.26	5STP38Q4200	4200	4275	Φ151.26
5STP18F1401	1400	1825	Φ75.26	5STP42U5800	5800	3460	Φ172.35
5STP18F1600	1600	1600	Φ75.26	5STP42U6200	6200	3460	Φ172.35
5STP18F1601	1600	1825	Φ75.26	5STP42U6500	6500	3460	Φ172.35
5STP18F1800	1800	1600	Φ75.26	5STP45N2200	2200	5080	Φ150.35
5STP18F1801	1800	1825	Φ75.26	5STP45N2600	2600	5080	Φ150.35
5STP18H3600	3600	2075	Φ101.26	5STP45N2800	2800	5080	Φ150.35
5STP18H4000	4000	2075	Φ101.26	5STP45Q2200	2200	5490	Φ151.26
5STP18H4200	4200	2075	Φ101.26	5STP45Q2600	2600	5490	Φ151.26
5STP18M5800	5800	1800	Φ120.35	5STP45Q2800	2800	5490	Φ151.26
5STP18M6200	6200	1800	Φ120.35	5STP50Q1400	1400	6100	Φ172.35
5STP18M6500	6500	1800	Φ120.35	5STP50Q1600	1600	6100	Φ172.35
5STP20F1201	1200	1901	Φ75.26	5STP50Q1800	1800	6100	Φ172.35
5STP20F1401	1400	1901	Φ75.26	5STP52U4600	4600	4120	Φ172.35
5STP20F1601	1600	1901	Φ75.26	5STP52U5000	5000	4120	Φ172.35
5STP21F0800	800	1960	Φ75.26	5STP52U5200	5200	4120	Φ172.35
5STP21F1200	1200	1960	Φ75.26				
5STP21F1400	1400	1960	Φ75.26	5SHX03D6004	5500	280	Φ58.26
5STP24H2200	2200	2625	Φ101.26	5SHX04D4502	4500	340	Φ58.26
5STP24H2400	2400	2625	Φ101.26	5SHY35L4510	4500	4000	Φ120.26
5STP24H2600	2600	2625	Φ101.26	5SHY35L4511	4500	3800	Φ120.26
5STP24H2800	2800	2625	Φ101.26				
5STP25L4600	4600	2760	Φ120.26	5STB13N5800	5800	1400	Φ150.35
5STP25L5000	5000	2760	Φ120.26	5STB13N6200	6000	1400	Φ150.35
5STP25L5200	5200	2760	Φ120.26	5STB13N6500	6500	1400	Φ150.35
5STP26N5800	5800	2810	Φ150.35	5STB17N4600	4600	1800	Φ151.35
5STP26N6200	6200	2810	Φ150.35	5STB17N5000	5000	1800	Φ151.35
5STP26N6500	6500	2810	Φ150.35	5STB17N5200	5200	1800	Φ151.35
5STP27H1200	1200	3000	Φ101.26	5STB18N3600	3600	1920	Φ151.35
5STP27H1600	1600	3000	Φ101.26	5STB18N4000	4000	1920	Φ151.35
5STP27H1800	1800	3000	Φ101.26	5STB18N4200	4200	1920	Φ151.35
5STP27H2401	2400	3000	Φ101.26	5STB18U5800	5800	1580	Φ172.35
5STP27H2601	2600	3000	Φ101.26	5STB18U6200	6200	1580	Φ172.35
5STP27H2801	2800	3000	Φ101.26	5STB18U6500	6500	1580	Φ172.35
5STP28L3600	3600	3170	Φ120.26	5STB24N2200	2200	2430	Φ151.35
5STP28L4000	4000	3170	Φ120.26	5STB24N2600	2600	2430	Φ151.35
5STP28L4200	4200	3170	Φ120.26	5STB24N2800	2800	2430	Φ151.35
5STP29H1801	1800	2855	Φ101.26	5STB25U4600	4600	4120	Φ172.35
5STP29H2001	2000	2855	Φ101.26	5STB25U5000	5000	4120	Φ172.35
5STP29H2201	2200	2855	Φ101.26	5STB25U5200	5200	4120	Φ172.35
5STP30H1401	1400	3108	Φ101.26				

IR

SCR and Diodes

►Application

- DC motor controls
- Controlled DC power supplies
- AC controllers



►Features

- Center amplifying gate
- Metal case with ceramic insulator
- International standard case TO-200AB (E-PUK)





►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
ST203C10	1000	370	Φ42.14 ONE	ST300S08	800	300	M19 Sw45
ST203C12	1200	370	Φ42.14 ONE	ST300S12	1200	300	M19 Sw45
ST203S10	1000	205	M12.7 SW27	ST300S16	1600	300	M19 Sw45
ST203S12	1200	205	M12.7 SW27	ST300S18	1800	300	M19 Sw45
ST223C04	400	390	Φ42.14 ONE	ST300S20	1200	300	M19 Sw45
ST223C08	800	390	Φ42.14 ONE	ST303C04	400	515	Φ58,5.27
ST223S04	400	220	M12.7 SW27	ST303C08	800	515	Φ58,5.27
ST223S08	800	220	M12.7 SW27	ST303C12	1200	515	Φ58,5.27
ST230C04	400	410	Φ42.14 ONE	ST303S04	400	300	M19 Sw45
ST230C08	800	410	Φ42.14 ONE	ST303S08	800	300	M19 Sw45
ST230C12	1200	410	Φ42.14 ONE	ST303S12	1200	300	M19 Sw45
ST230C14	1400	410	Φ42.14 ONE	ST330C04	400	720	Φ42.14 TOW
ST230C16	1600	410	Φ42.14 ONE	ST330C08	800	720	Φ42.14 TOW
ST230S04	400	230	M19 Sw32	ST330C12	1200	720	Φ42.14 TOW
ST230S08	800	230	M19 Sw32	ST330C14	1400	720	Φ42.14 TOW
ST230S12	1200	230	M19 Sw32	ST330C16	1600	720	Φ42.14 TOW
ST230S16	1600	230	M19 Sw32	ST330S04	400	330	M19 Sw45
ST280C04	400	280	M19 Sw32	ST330S08	800	330	M19 Sw45
ST280C06	600	280	M19 Sw32	ST330S12	1200	330	M19 Sw45
ST280S04	400	280	M19 Sw32	ST330S14	1400	330	M19 Sw45
ST280S06	600	280	M19 Sw32	ST330S16	1600	330	M19 Sw45
ST300C04	400	560	Φ58,5.27	ST333C04	400	620	Φ58,5.27
ST300C08	800	560	Φ58,5.27	ST333C08	800	620	Φ58,5.27
ST300C12	1200	560	Φ58,5.27	ST333S04	400	330	M19 Sw45
ST300C16	1600	560	Φ58,5.27	ST333S08	800	330	M19 Sw45
ST300C18	1800	560	Φ58,5.27	ST730C08	800	990	Φ58,5.27
ST300C20	2000	560	Φ58,5.27	ST730C12	1200	990	Φ58,5.27
ST300S04	400	300	M19 Sw45	ST730C14	1400	990	Φ58,5.27

IR

►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
ST730C16	1600	990	Φ58,5.27	ST203S06P-12P	600	205	M12.7 SW27
ST730C18	1800	990	Φ58,5.27	ST333S06P-12P	600	330	M19 Sw45
ST730C20	2000	990	Φ58,5.27	ST083C06C-12C	600	85	M12.7 SW27
ST730S04	800	N/A	N/A	ST203C06C-12C	600	370	Φ42.14 ONE
ST730S08	1200	N/A	N/A	ST223C06C-12C	600	370	Φ42.14 ONE
ST730S12	1400	N/A	N/A	ST300C06C-12C	600	560	Φ58,5.27
ST730S14	1600	N/A	N/A	ST303C06C-12C	600	515	Φ58,5.27
ST730S16	1800	N/A	N/A	ST333C06C-12C	600	720	Φ42.14 TOW
ST730S20	2000	N/A	N/A				
ST1230C08	800	1745	Φ74,5.27,5				
ST1230C12	1200	1745	Φ74,5.27,5				
ST1230C14	1400	1745	Φ74,5.27,5				
ST1230C16	1600	1745	Φ74,5.27,5				
ST1230S08	800	N/A	N/A				
ST1230S12	1200	N/A	N/A				
ST1230S14	1400	N/A	N/A				
ST1230S16	1600	N/A	N/A				

TOSHIBA

SCR and Diodes



►Application

- DC motor controls
- Controlled DC power supplies
- AC switch and thermal control
- Synchronous motor excitation

►Features

- IT (AV) = 5 - 500As
- V DRM/V RRM=100 - 5000V
- Hermetic metal case with ceramic insulator
- Hermetic glass-metal seal
- Capsule package for double sided cooling
- Shallow design with single sided cooling
- International standard case
- In accordance with IEC international electrical committee standard

►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
SF50N13	1000	50	M8x1.25 L52	SF250R27	1300	250	Φ45.14
SF50Q13	1200	50	M8x1.25 L52	SF250U27	1600	250	Φ45.14
SF80D15	200	80	M12x1.52	SF300B27	100	250	Φ45.14
SF80G15	400	80	M12x1.52	SF300D27	200	300	Φ45.14
SF80J15	600	80	M12x1.52	SF300G15	400	300	Φ45.14
SF80L13	800	80	M12x1.52	SF300G27	400	300	M24x1.5
SF80N13	1000	80	M12x1.52	SF300HX22	5000	300	Φ45.14
SF80Q13	1200	80	M12x1.52	SF300J15	600	300	Φ70.35
SF80R13	1300	80	M12x1.52	SF300J27	600	300	M24x1.5
SF80U13	1600	80	M12x1.52	SF300L13	800	300	Φ45.14
SF100L27	800	100	Φ37.14	SF300N13	1000	300	M24x1.5
SF100N27	1000	100	Φ37.14	SF300Q13	1200	300	M24x1.5
SF100Q27	1200	100	Φ37.14	SF300R13	1300	300	M24x1.5
SF100R27	1300	100	Φ37.14	SF300U13	1600	300	M24x1.5
SF100U27	1600	100	Φ37.14	SF400L27	800	300	M24x1.5
SF150B27	100	150	Φ37.14	SF400N27	1000	400	Φ51.14
SF150D27	200	150	Φ37.14	SF400Q27	1200	400	Φ51.14
SF150G15	400	150	M20x1.5	SF400R27	1300	400	Φ51.14
SF150G27	400	150	Φ37.14	SF400U27	1600	400	Φ51.14
SF150J15	600	150	M20x1.5	SF500B27	100	400	Φ51.14
SF150J27	600	150	Φ37.14	SF500D27	200	500	Φ51.14
SF150L13	800	150	M20x1.5	SF500EX25	2500	500	Φ51.14
SF150N13	1000	150	M20x1.5	SF500EX26	2500	500	Φ70.35
SF150Q13	1200	150	M20x1.5	SF500G27	400	500	Φ78.17
SF150R13	1300	150	M20x1.5	SF500J27	600	500	Φ51.14
SF150U13	1600	150	M20x1.5	SF500L27	800	500	Φ51.14
SF250L27	800	250	Φ45.14	SF500N27	1000	500	Φ57.14
SF250N27	1000	250	Φ45.14	SF500Q27	1200	500	Φ57.14

TOSHIBA

►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
SF500R27	1300	500	Φ57.14	SG500FXF22	3300	500	Φ60.26
SF500U25	1600	500	Φ70.35	SG500GXH22	4500	500	Φ60.26
SF500U26	1600	500	Φ78.17	SG600EX21	2500	600	Φ78.17
SF500U27	1600	500	Φ57.14	SG1000R22	1300	1000	Φ66.20
SF500Y25	2000	500	Φ70.35	SG1000R23	1300	1000	Φ60.26
SF500Y26	2000	500	Φ78.17	SG1000U23	1600	1000	Φ60.26
SF600B27	100	600	Φ57.14	SG1000W23	1800	1000	Φ60.26
SF600D27	200	600	Φ57.14	SG1000EX23	2500	1000	Φ60.26
SF600G27	400	600	Φ57.14	SG1200EX21	2500	1200	Φ100.21,5 55
SF600J27	600	600	Φ57.14	SG1200R23	1300	1200	Φ60.26
SF800GX21	4000	800	Φ100.21 60	SG1200U23	1600	1200	Φ60.26
SF800J25	600	800	Φ70.35	SG1200E23	1800	1200	Φ60.26
SF800J26	600	800	Φ78.17	SG1200EX23	2500	1200	Φ60.26
SF800L25	800	800	Φ70.35	SG1200EX24	2500	1200	Φ60.26
SF800L26	800	800	Φ78.17	SG2000EX21	2500	2000	Φ120.26
SF800N25	1000	800	Φ70.35	SG2000FXF21	3300	2000	Φ120.26
SF800N26	1000	800	Φ78.17	SG2000GXH21	4500	2000	Φ120.26
SF800R25	1300	800	Φ70.35	SG2000R22	1300	2000	Φ120.36
SF800R26	1300	800	Φ78.17	SG2000U22	1600	2000	Φ120.36
SF800U25	1600	800	Φ70.35	SG2000W22	1800	2000	Φ120.36
SF800U226	1600	800	Φ78.17	SG2000EX22	2500	2000	Φ120.36
SF1000EX24	2500	1000	Φ100.21 55	SG2500GXH24	4500	2500	Φ110.26
SF1000GX21	4000	1000	Φ100.21 60	SG3000GXH24	4500	3000	Φ110.26
SF1500EX24	2500	1500	Φ100.21 55				
SF1500G27	400	1500	Φ100.21 55	SG3000GXH29	4500	3000	Φ110.26
SF1500GX22	4000	1500	Φ120.26	SG4000GXH28	4500	4000	Φ120.26
SF1500J	600	1500	Φ100.21,5 55				
SF1500L	800	1500	Φ100.21,5 55	SH400R29B	1300	400	Φ78.17
SF1500Q	1200	1500	Φ100.21,5 55	SHR400R22	1300	630	Φ78.17
SF1500U	1600	1500	Φ100.21,5 55				
SF2500EX21	2500	2500	Φ120.26				
SF3000GX21	4000	3000	Φ150.26				

FUJI

SCR and Diodes

►Application

- Inverters
- Converters
- DC choppers
- Induction heating
- DC to DC converters

►Features

- Anode short type
- Hermetic metal case with ceramic insulator
- Hermetic glass-metal seal
- Capsule package for double sided cooling
- Shallow design with single sided cooling
- International standard case
- In accordance with IEC international electrical committee standard

►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
EGD06-06	600	10	M5 L33	EGN05-06	600	300	M24x1.5
EGD06-08	800	10	M5 L33	EGN05-08	800	300	M24x1.5
EGE06-02	200	20	M6 L36	EGN05-10	1000	300	M24x1.5
EGE06-04	400	20	M6 L36	EGN05-12	1200	300	M24x1.5
EGE06-06	600	20	M6 L36	EGN05-16EGN13-16	1600	300	M24x1.5
EGE06-08	800	20	M6 L36	EGN14-08	1600	300	Φ56.14
EGE16-02	200	20	M6 L36	EGN24-06	800	450	Φ56.14
EGE16-04	400	20	M6 L36	EGN24-08	600	250	M24x1.5
EGE16-08	800	20	M6 L36	EGN26-08	800	250	M24x1.5
EGE16-08	800	20	M6 L36			400	Φ56.14
EGG06-02	200	40	M8 L39	EGP04-25	2500	500	Φ92.16
EGG06-04	400	40	M8 L39	EGP13-16	1600	700	Φ56.14
EGG06-06	600	40	M8 L39	EGP14-08	800	700	Φ56.14
EGG06-08	800	40	M8 L39	EGP26-13A	1300	460	M24x1.5
EGH16-06	600	75	M12x1.5 L218	EGP26-13B	1300	460	M24x1.5
EGH16-08	800	75	M12x1.5 L218				
EGH16-10	1000	75	M12x1.5 L218	EGR03-25	4000	1000	Φ95.21
EGH16-12	1200	75	M12x1.5 L218	EGS03-40	4000	1000	Φ102.21
EGL16-06	600	150	M20x1.5 L220				
EGL16-08	800	150	M20x1.5 L220				
EGL16-10	1000	150	M20x1.5 L220				
EGL16-12	1200	150	M20x1.5 L220				

EUPEC

SCR and Diodes



►Application

- DC motor control
- NC equipment
- AC motor control
- Contactless switches
- Electric furnace temperature control

►Features

- Hermetic metal case with ceramic insulator
- Capsule package for double sided cooling
- Shallow design with single sided cooling
- International standard case



►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
T4003NH	5400	100000	T172.40L/112	T345N	1200…1800	550	TFL54/108
T1503NH	7700...8200	55000	T150.40L/112	T358N	1200…1800	700	T41.14/109
T2563NH	7700...8200	90000	T172.40L/112	T370N	1200…1800	650	TSW41/108
D2601NH	9000	22000	D120.26K/116	T378N	1200…1600	800	T41.14/109
				T388N	1200…1800	730	T50.14/109
T1101N	3000	29000	T100.26K/111	T508N	1200…1800	800	T50.14/109
D2201N	4500	35000	D100.26K/116	T509N	1200…1800	800	T57.26/109
				T588N	1200…1800	1250	T50.14/109
T210N	200…600	330	TSW27/108	T589N	1200…1800	1250	T57.26/109
T348N	200…600	600	T41.14/109	T618N	1200…1400	1250	T50.14/109
T398N	200…600	800	T41.14/109	T619N	1200…1400	1250	T57.26/109
T568N	200…600	900	T41.14/109	T648N	1200…1600	1300	T60.14/109
T828N	200…600	1500	T50.14/109	T649N	1200…1600	1300	T57.26/109
T1078N	200…600	2000	T50.14/109	T718N	1200…1600	1500	T60.14/109
T1258N	200…600	2500	T60.14/109	T719N	1200…1600	1500	T57.26/109
T2509N	200…600	4900	T75.26/109	T878N	1200…1800	1750	T60.14/109
T3709N	200…600	7000	T100.26/109	T879N	1200…1800	1750	T57.26/109
				T1049N	1200…1800	1870	T75.26/109
T86N	1200…1800	200	TSW27/108	T1189N	1200…1800	2800	T75.26/109
T130N	1200…1800	300	TSW27/108	T1500N	1200…1800	3500	T75.26K/110
			TFL36/108	T1509N	1200…1800	3500	T75.26/109
T160N	1200…1800	300	TSW27/108	T1986N	1200…1800	4200	T100.35/109
			TFL36/108	T1989N	1200…1800	4200	T100.26/109
T178N	1200…1800	300	T41.14/109	T3159N	1200…1800	7000	T110.26/110
T218N	1200…1800	400	T41.14/109				
T221N	1200…1800	450	TSW41/108	T217N	2000…2500	650	TSW41/108
			TFL54/108	T308N	2000…2600	550	T50.14/109
T298N	600…1600	600	T41.14/109	T458N	2000…2600	1000	T60.14/109

EUPEC

►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
T459N	N/A	N/A	T57.26/109	T551N	6000…7000	1260	T76.35K/111
T639N	1800…2200	1250	T57.26/109	T571N	6000…6500	1150	T76.26K/110
T658N	2200…2600	1500	T60.14/109	T1081N	6000…7000	2830	T120.26K/111
T659N	2200…2600	1500	T57.26/109	T1201N	6000…7000	2600	T120.35K/111
T699N	1800…2200	1500	T57.26/109	T1651N	6000…7000	3610	T120.35K/111
T708N	1800…2200	1500	T60.14/109	T1851N	6000…7000	3940	T120.26K/111
T709N	2000…2600	1500	T75.26/109	T1901N	7000…8000	4520	T150.35K/111
T829N	2000…2600	1800	T75.26/109	T2251N	7000…8000	4840	T150.26K/111
T1039N	1800…2200	2200	T75.26/109	T2871	7000…8000	6060	T172.35K/112
T1218N	2000…2600	2625	T75.14/109				
T1219N	2000…2800	2625	T75.26/109	T553N	7200	1200	T76.35L/112
T1329N	1800…2200	2600	T75.26/109	T1503N	7700…8200	3900	T150.40L/112
T1589N	2000…2800	3200	T110.26/110	T2563N	7700…8200	5600	T172.40L/112
T1866N	1800…2200	4100	T100.35/109	T4003N	5400	5600	T172.42L/112
T1869N	1800…2200	4100	T100.26/109				
T2101N	2000…2600	5050	T120.35K/111	T72F	400…600	200	TSW27/108
T2156N	2000…2800	4600	T110.35/110	102F	200…600	220	TSW27/180
T2159N	2000…2800	4600	T110.26/110	178F	200…600	300	T41.14/109
T2160N	2000…2800	4600	T120.26K/111	T308F	200…600	600	T41.14/109
T2476N	2200…2800	5100	T110.35/110	T689F	200…600	1100	T50.14/109
T2479N	2200…2800	5100	T110.26/110	T1078F	200…400	2000	T50.14/109
T2480N	2200…2800	5100	T120.26K/111				
T2709N	1600…2200	5800	T110.26/110	T80F	1000…1300	550	TFL54/108
T2710N	1600…2200	5800	T120.26K/111	T318F	1000…1200	700	T50.14/109
T4301N	2200…2900	9420	T150.35K/111	T320F	1000…1300	600	TSW41/108
T4771N	2200…2900	10110	T150.26K/111	T340F	1000…1400	600	TFL54/108
				T408F	1000…1200	750	T50.14/109
T379N	3600…4200	800	T57.26/109	T599F	1000…1300	1500	T57.26/109
T380N	3200…3800	750	T57.26K/110	T600F	1000…1300	1500	T57.26K/110
T729N	3600…4200	1840	T75.26/109	T1052F	1000…1200	2200	T76.2K/110
T730N	3600…4200	1840	T75.26K/110				
T731N	3600...4400	2010	T76.26K/110	T930S	1600…2000	2000	T75.26K/110
T869N	3000…3600	2000	T75.26/109				
T901N	2800…3600	2050	T75.26K/110	A158S	1000...1300	400	T41.14/109
T929N	3000…3600	2200	T75.26/109	A198S	1000...1300	400	T41.14/109
T1401N	3600…4400	3450	T120.35K/111	A358S	1000...1300	800	T50.14/109
T1971N	3600…4400	3700	T120.26K/111	A438S	1000...1300	900	T50.14/109
T1601N	2800…3600	4160	T120.35K/111				
T1929N	3000…3800	4200	T110.26/110	D255N	200…800	400	DSW27/113
T2001N	2800…3600	4460	T120.26K/111	D255K	200…800	400	DSW27/113
T3401N	3100…3600	8350	T150.35K/111	D448N	200…800	710	D41.14/114
T3801N	3100…3600	8950	T150.26K/111	D758N	400…800	1195	D41.14/114
T3101N	4000…4000	6830	T150.35K/111	D2228N	200…600	4000	D60.14/114
				D2898N	400…600	6100	D60.14/114
T1451N	4800…5200	3610	T120.35K/111	D4457N	400…600	7000	D60.8/114
T1551N	4800…5200	3920	T120.26K/111	D5807N	400…600	9100	D73.8/114
T2161N	4800…5200	4630	T120.35K/111	D5809N	400…600	9100	D75.26/114
T2351N	4800…5200	5000	T120.26K/111	D6247N	400…600	9800	D60.8/114
T2401N	4800…5200	5970	T150.35K/111	D8019N	200…600	13300	D100.26/115
T2851N	4800…5200	6230	T150.35K/111	D8407N	400…600	13200	D73.8/114
T3441N	4800…5200	6600	T150.26K/111				
T4021N	4800…5350	8480	T172.35K/112	D452N	1200…1800	710	DFL54/113
				D452K	1200…1800	710	DFL54/113
T201N	6000…7000	510	T58.26K/110	D798N	1200…1800	1650	D50.14/114
T281N	6000…6500	600	T58.26K/110	D1049N	1200…1800	2590	D57.24/114
T501N	6000…7000	1260	T76.26K/110				

EUPEC

►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
D121N	1200…2000	360	DSW27/113	D170U	2500	N/A	DSW27.1/113
D121K	1200…2000	330	DSW27/113	D228S	2500	N/A	D60.14/114
D251N	1200…2000	400	DSW27/113	D56S	4500	N/A	DSW27.2/113
			DFL36/113	D56U	4500	N/A	DSW27.2/113
D251K	1200…2000	400	DSW27/113	D291S	3500…4500	N/A	D58.26K/115
			DFL36/113	D841S	4500	N/A	D76.14K/116
D400N	1600…2000	710	DSW41/113				
D400K	1600…2000	710	DSW41/113	D371S	4500	N/A	D58.26K/115
D428N	1200…2000	840	D41.14/114	D801S	4500	N/A	D76.14K/116
D660N	1200…2000	1435	D41.14K/115	D901S	3500…4500	N/A	D100.26K/116
D748N	2000…2800	1260	D50.14/114				
D1029N	1800...2600	2040	D57.26/114	D138S	900…1000	230	D41.14/114
D1030N	2000…2400	2040	D57.26K/115	D358S	600…1000	730	D41.14/114
D1709N	2000…2400	2700	D75.26/114	D648S	800…1000	1400	D50.14/114
D2200N	2000…2800	4900	D75.26K/115	D649S	800…1000	1400	D50.14/114
D2209N	2000…2800	4900	D75.26/114				
D2650N	2000…2400	4710	D75.26K/115	D188S	1000…1400	290	D41.14/114
D2659N	2000…2400	4710	D75.26/114	D211S	1000…1400	400	DSW27/113
D4201N	1600…2200	11200	D120.35K/116	D211U	1000…1400	400	DSW27/113
D4709N	2000…2800	8400	D110.26/115	D238S	1200	455	D41.14/114
				D368S	1000…1400	730	D41.14/114
D269N	3200…3600	550	D57.26/114	D658S	1000…1400	1400	D50.14/114
D475N	3200…4000	745	DSW41.1/113	D659S	1000…1400	1400	D57.26/114
D475K	3200…4000	745	DSW41.1/113				
D749N	3600…4800	1540	D57.26/114	D170S	2500	400	DSW27.1/113
D849N	2800…4000	1790	D57.26/114	D170U	2500	330	DSW27.1/113
D850N	2800…4000	1790	D57.26K/115	D228S	2200...2500	450	D41.14/114
D1069N	3600…4400	2200	D75.26/114	D348S	1600…2000	645	D41.14/114
D1800N	3200…4800	3850	D75.26/114	D438S	1600…2000	740	D41.14/114
D1809N	3200…4800	3850	D75.26K/115	D440S	1600…2000	740	D57.26K/115
D3501N	3200…4200	8200	D120.35K/116	D509S	2400…2600	1050	D57.26/114
D6001N	4500…5000	13000	D150.26K/116	D675S	2000…2500	1200	D57.26K/115
				D689S	2000…2600	1600	D57.26/114
D471N	8000…9000	1200	D58.26K/115	D690S	N/A	N/A	D57.26K/115
D711N	5800…6800	1670	D58.26K/115	D1169S	2000…2500	3360	D75.26/114
D1481N	5800…6800	3610	D76.26/116	D1170S	2000…2500	3360	D75.26K/115
D2601N	8500…9000	4820	D120.26K/116	D1408S	2000…2500	3360	D75.14/114
D3001N	5800…6800	6340	D120.35K/116				
D3041N	5800…6800	6620	D120.26K/116	D56S	4000…4500	160	DSW27.2/113
				D56U	4000…4500	140	DSW27.2/113
D911SH	4500	1200	D100.26K/116				
D1031SH	4500	1500	D100.26K/116	D126A45	4500	315	DSW27.2/113
D1121SH	4500	1200	D120.26K/116	D126B45	4500	300	DSW27.2/113
D1331SH	4500	1500	D120.26K/116	DD126A45K-B9*	450	220	DSW30.1/107
D931SH	6500	1300	D100.26/116				
D1131SH	6500	1300	D120.26K/116	25DN06	600	1800	25DN06/115
D1951SH	6500	1800	D150.26K/116	38DN06	600	6100	38DN06/115
				46DN06	600	8000	46DN06/115
D1170S	2000…2500	580	D75.26K/115	46DN06S01	600	9800	46DN06/115
D721S	3500…4500	600	D75.26K/115	56DN06	600	10050	56DN06/115
D1461S	3500…4500	840	D100.26K/116	56DN06S01	600	13200	56DN06/115
D1251S	4500	800	D76.14K/116	65DN06	600	13300	65DN06/115
D921S	4500	700	D100.26K/116	65DN06S01	600	17900	65DN06/115
D1381S	4500	700	D100.26K/116				
D170S	2500	N/A	DSW27.1/113				

MITSUBISHI

SCR and Diodes



►Application

- Inverters
- Converters
- DC choppers
- Induction heating
- DC to DC converters

►Features

- Anode short type
- Hermetic metal case with ceramic insulator
- Hermetic glass-metal seal
- Capsule package for double sided cooling
- Shallow design with single sided cooling
- International standard case
- In accordance with IEC international electrical committee standard

►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
SR60L-10R	500	60	N/A	FD1600CP-10	500	1600	Φ35
SR60L-10S	500	60	N/A	FD1600A-60	3000	1600	Φ50
SR100L-10R	500	100	N/A	FD1600CV-80	4000	1600	Φ60
SR100L-10S	500	100	N/A	FD3500BP-12	600	3500	Φ60
SR130L-10R	500	130	N/A	FD3500AH-56	2800	3500	Φ80
SR130L-10S	500	130	N/A	FD5000AV-100DA	5000	5000	Φ85
SR150L-10R	500	150	N/A				
SR150L-10S	500	150	N/A	SR202AH-50R	2500	150	M20
SR170L-10R	500	170	N/A	SR202AH-50S	2500	150	M20
SR170L-10S	500	170	N/A	SR202AV-90	4500	150	M24
SR200L-10R	500	200	N/A	FD250AV-90	4500	230	Φ34
SR200L-10S	500	200	N/A	FD452AH-50	2500	440	Φ29.5
SR202AM-40R	2000	200	M12	FD602BV-90	4500	610	Φ47
SR202AM-40S	2000	200	M12	FD1000FV-90	4500	800	Φ60
FD252AM-40	2000	240	Φ19	FD1000FX-90	4500	800	Φ60
SR250L-10R	500	250	N/A	FD1000FH-56	2800	1000	Φ50
SR250L-10S	500	250	N/A	FD1500AV-90	4500	1500	Φ70
SR252AM-40R	2000	250	M20	FD2000DU-120	6000	1700	Φ130
SR252AM-40S	2000	250	M20				
SR302AL-24R	1200	300	M20	FD500JV-90DA	4500	500	Φ47
SR302AL-24S	1200	300	M20	FD1500CV-90DA	4500	1500	Φ85
FD402AM-32	1600	375	Φ19	FD1500AU-120DA	6000	1500	Φ85
FD402AL-16	800	400	Φ25.1	FD3000AU-120DA	6000	3000	Φ130
SR402AH-60	3000	400	M24				
FD602AH-60	3000	600	Φ29.5	CR152AL-24	1200	150	M12
FD602AV-88	4400	600	Φ34	CR202AM-36	1800	175	M20
FD1000A-56	2800	800	Φ45	CR252AP-12	600	250	M21
FD1000D-56	2800	800	Φ35	CR252AM-36	1800	250	M24

MITSUBISHI

►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
FT302AM-36	1800	300	Φ19	CR152AY-24	1200	150	M12
FT502AH-80	4000	320	Φ34	FT502AY-24	1200	410	Φ34
CR402AM-36	1800	350	M24	FT1000CY-24	1200	800	Φ50
FT402AL-32	1600	400	Φ25.1	FT1000CX-56	2800	800	Φ60
FT402AM-36	1800	400	Φ25.1	FT1000AX-50	2500	1000	Φ60
FT502AL-32	1600	500	Φ25.1	FT1500EX-24	1200	1500	Φ60
FT502BH-44	2200	500	Φ34	FT1500EY-24	1200	1500	Φ60
FT802AL-24	1200	800	Φ34				
FT802AV-90	4500	800	Φ47	FG1000BV-90DA	4500	1000	Φ47
FT1000A-50	2500	1000	Φ50	FG2000JV-90DA	4500	2000	Φ63
FT1000BV-80	4000	1000	Φ60	FG2000FX-50DA	2500	2200	Φ63
FT1500DL-28	1400	1500	Φ50	FG3000DV-90DA	4500	3000	Φ70
FT1500CH-54	2700	1500	Φ60	FG3000GX-90DA	4500	3000	Φ75
FT1500DV-80	4000	1500	Φ80	FG4000BX-90DA	4500	4000	Φ85
FT1500GV-80	4000	1500	Φ80	FG3300AH-50DA	2500	3000	Φ70
FT1500AU-240	12000	1500	Φ105	FG4000CX-90DA	4500	4000	Φ85
FT2500CL-24	1200	2500	Φ60	FG4000EX-50DA	2500	4000	Φ85
FT2500BH-56	2800	2500	Φ80	FG4000GX-90DA	4500	4000	Φ85
FT5000AP-8	400	5000	Φ80	FG6000AU-120D	6000	6000	Φ130

SEMIKRON

SCR and Diodes



►Application

- DC motor control

(e.g.for machine tools)

- Controlled rectifiers

(e.g.for battery charging)

- AC controllers

(e.g.for temperature control)

- General purpose DC power supply uints.



►Features

- Hermetic metal case with ceramic insulator
- Capsule package for double sided cooling
- Shallow design with single sided cooling
- International standard case
- Off-state and reverse voltages up to 2800V

►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
SKN20	400-1600	20	E9 M6 Sw11	SKN135F	800-1200	135	E14 M12 I165 Sw24
SKR20	400-1600	20	E9 M6 Sw11	SKN136F	800-1200	135	E31 M12 I55 sw24
SKN26	400-1600	20	E8 M6 I21.5 sw11	SKR135F	800-1200	1350	E14 M12 I165 Sw24
SKR26	400-1600	20	E8 M6 I21.5 sw11	SKR136F	800-1200	135	E31 M12 I55 sw24
SKN45	400-1600	45	E12 M8 I135 Sw17	SKN140F	1200-1700	140	E14 M12 I165 Sw24
SKR45	400-1600	45	E12 M8 I135 Sw17	SKN141F	1200-1700	140	E31 M12 I55 sw24
SKN70	400-1600	70	E12 M8 I135 Sw17	SKR140F	1200-1700	140	E14 M12 I165 Sw24
SKN71	400-1600	70	E11 M8 I25.5 sw17	SKR141F	1200-1700	140	E31 M12 I55 sw24
SKR70	400-1600	70	E12 M8 I135 Sw17				
SKR71	400-1600	70	E11 M8 I25.5 sw17	SKNA20	1300-1700	20	E9 M6 Sw11
SKN100	400-1800	100	E13 M12 I165 Sw24	SKNA22	3600-5000	25	E42 M6
SKR100	400-1800	100	E13 M12 I165 Sw24	SKNA47	3600-5000	45	E43 M8
SKN130	400-1800	130	E14 M12 I165 Sw24	SKNA102	3600-5000	125	E44 M12
SKR130	400-1800	130	E14 M12 I165 Sw24	SKNA202	3600-5000	200	E45 M16x1.5
SKN240	400-1800	240	E15 M16x1.5 SW32	SKNA402	3600-5000	400	E46 M24x1.5
SKR240	400-1800	240	E15 M16x1.5 SW32				
SKN320	400-1600	320	E16 M24x1.5 SW41	SKN4000	200-600	4000	E35 Φ60.8
SKR320	400-1600	320	E16 M24x1.5 SW41	SKN6000	200-600	6000	E35 Φ60.8
SKN400	1800-3000	400	E17 M24x1.5 SW41				
				SKT10	600-2100	10	B1 M5 Sw11
SKN2F17	400-1000	17	E7 M5 sw11	SKT16	400-1800	16	B2 M6 Sw14
SKR2F17	400-1000	17	E7 M5 sw11	SKT24	400-1800	24	B2 M6 Sw14
SKN3F20	800-1200	20	E7 M5 sw11	SKT40	400-1800	40	B3 M8 Sw17
SKR3F20	800-1200	20	E7 M5 sw11	SKT50	600-1800	50	B3 M8 Sw17
SKN2F50	400-1000	50	E10 M6 sw17	SKT55	400-1800	55	B5 M12 Sw24
SKR2F50	400-1000	50	E10 M6 sw17	SKT80	600-1800	80	B5 M12 Sw24
SKN60F	1200-1700	60	E10 M6 sw17	SKT100	400-1800	100	B5 M12 Sw24
SKR60F	1200-1700	60	E10 M6 sw17	SKT130	400-1600	135	B6 M16x1.5 SW32

SEMIKRON

►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
SKT160	400-1600	160	B6 M16x1.5 SW32	SKT553	400-1800	550	B11a Φ41.14
SKT250	400-1600	250	B7 M24x1.5 SW41	SKT600	800-1800	600	B10 Φ57.26
SKT300	400-1600	300	B7 M24x1.5 SW41	SKT760	800-1800	760	B10 Φ57.26
				SKT1000	120-2800	1000	B14 Φ73.26
SKT240	400-1800	240	B8 Φ41.14	SKT1200	1200-2800	1200	B14 Φ73.26
SKT340	800-1800	340	B8 Φ41.14	SKT1400	2600-3600	1400	B19 Φ102.33
SKT491	400-1800	490	B11 Φ41.14	SKT1800	1200-1600	1800	B19 Φ102.33
SKT493	400-1800	490	B11a Φ41.14	SKT2000	2200-2800	2000	B20 Φ111.37
SKT551	800-1800	550	B11 Φ41.14	SKT2400	1200-1800	2400	B20 Φ111.37

WESTCODE

SCR and Diodes



►Application

- Inverters for AC motors
- Power supply units for DCmotors
- DC power supply uints for battery chargers
- General purpose DC power supply uints.



►Features

- Hermetic metal case with ceramic insulator
- Capsule package for double sided cooling
- Shallow design with single sided cooling
- International standard case
- Off-state and reverse voltages up to 1800V

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
W0428RE250	2500	428	W39	WX171RE250
W0428RE280	2800	428	W39	WX171RE280
W0428RE320	3200	428	W39	WX171RE320
W0428RF250	2500	428	W24	WX171RF250
W0428RF280	2800	428	W24	WX171RF280
W0428RF320	3200	428	W24	WX171RF320
W0428SE250	2500	428	W39	WX171SE250
W0428SE280	2800	428	W39	WX171SE280
W0428SE320	3200	428	W39	WX171SE320
W0428SF250	2500	428	W24	WX171SF250
W0428SF280	2800	428	W24	WX171SF280
W0428SF320	3200	428	W24	WX171SF320
W0438RC160	1600	438	W24	SW16PHR320
W0438RC200	2000	438	W24	SW20PHR320
W0438RC240	2400	438	W24	SW24PHR320
W0438SC160	1600	438	W24	SW16PHN320
W0438SC200	2000	438	W24	SW20PHN320
W0438SC240	2400	438	W24	SW24PHN320
W0438RD160	1600	438	W26	SW16HHR320
W0438RD200	2000	438	W26	SW20HHR320
W0438RD240	2400	438	W26	SW24HHR320
W0438SD160	1600	438	W26	SW16HHN320
W0438SD200	2000	438	W26	SW20HHN320
W0438SD240	2400	438	W26	SW24HHN320
W0503RC160	1600	503	W24	SW16PHR380
W0503RC200	2000	503	W24	SW20PHR380
W0503RC240	2400	503	W24	SW24PHR380
W0503SC160	1600	503	W24	SW16PHN380

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
W0503SC200	2000	503	W24	SW20PHN380
W0503SC240	2400	503	W24	SW24PHN380
W0503RD160	1600	503	W26	SW16HHR380
W0503RD200	2000	503	W26	SW20HHR380
W0503RD240	2400	503	W26	SW24HHR380
W0503SD160	1600	503	W26	SW16HHN380
W0503SD200	2000	503	W26	SW20HHN380
W0503SD240	2400	503	W26	SW24HHN380
W0508RA040	400	508	W23	SW04PHR300
W0508RA120	1200	508	W23	SW12PHR300
W0508RA150	1500	508	W23	SW15PHR300
W0508SA040	400	508	W23	SW04PHN300
W0508SA120	1200	508	W23	SW12PHN300
W0508SA150	1500	508	W23	SW15PHN300
W0508RB040	400	508	W27	SW04HHR300
W0508RB120	1200	508	W27	SW12HHR300
W0508RB150	1500	508	W27	SW15HHR300
W0508SB040	400	508	W27	SW04HHN300
W0508SB120	1200	508	W27	SW12HHN300
W0508SB150	1500	508	W27	SW15HHN300
W0628RA040	400	628	W23	SW04PHR400
W0628RA120	1200	628	W23	SW12PHR400
W0628RA150	1500	628	W23	SW15PHR400
W0628SA040	400	628	W23	SW04PHN400
W0628SA120	1200	628	W23	SW12PHN400
W0628SA150	1500	628	W23	SW15PHN400
W0628RB040	400	628	W27	SW04HHR400
W0628RB120	1200	628	W27	SW12HHR400
W0628RB150	1500	628	W27	SW15HHR400
W0628SB040	400	628	W27	SW04HHN400
W0628SB120	1200	628	W27	SW12HHN400
W0628SB150	1500	628	W27	SW15HHN400
W0735RA040	400	735	W23	SW04PHR470
W0735RA120	1200	735	W23	SW12PHR470
W0735RA150	1500	735	W23	SW15PHR470
W0735SA040	400	735	W23	SW04PHN470
W0735SA120	1200	735	W23	SW12PHN470
W0735SA150	1500	735	W23	SW15PHN470
W0735RB040	400	735	W27	SW04HHR470
W0735RB120	1200	735	W27	SW12HHR470
W0735RB150	1500	735	W27	SW15HHR470
W0735SB040	400	735	W27	SW04HHN470
W0735SB120	1200	735	W27	SW12HHN470
W0735SB150	1500	735	W27	SW15HHN470
W0507YH360	3600	507	W3	SW36HXC270
W0507YH450	4500	507	W3	SW45HXC270
W0614WC160	1600	614	W1	SW16CXC320
W0614WC200	2000	614	W1	SW20CXC320
W0614WC240	2400	614	W1	SW24CXC320
W0642WC160	1600	680	W1	SW16CXC380
W0642WC200	2000	680	W1	SW20CXC380
W0642WC240	2400	680	W1	SW24CXC380
W0646WC060	600	646	W1	SW06CXC300
W0646WC120	1200	646	W1	SW12CXC300
W0646WC150	1500	646	W1	SW15CXC300

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
W0797WC040	400	797	W1	SW04CXC400
W0797WC120	1200	797	W1	SW12CXC400
W0797WC150	1500	797	W1	SW15CXC400
W0944WC040	400	944	W1	SW04CXC470
W0944WC120	1200	944	W1	SW12CXC470
W0944WC150	1500	944	W1	SW15CXC470
W1032LC500	5000	1032	W4	SW50CXC350
W1032LC560	5600	1032	W4	SW56CXC350
W1032LC600	6000	1032	W4	N/A
W1074YC200	2000	1074	W2	SW20CXC445
W1074YC320	3200	1074	W2	SW32CXC445
W1074YH200	2000	1074	W3	SW20HXC445
W1074YH320	3200	1074	W3	SW32HXC445
W1185LC300	3000	1185	W4	SW30CXC515
W1185LC380	3800	1185	W4	SW38CXC515
W1185LC450	4500	1185	W4	SW45CXC515
W1263YC160	1600	1263	W2	SW16CXC565
W1263YC200	2000	1263	W2	SW20CXC565
W1263YC250	2500	1263	W2	SW25CXC565
W1263YH160	1600	1263	W3	SW16HXC565
W1263YH200	2000	1263	W3	SW20HXC565
W1263YH250	2500	1263	W3	SW25HXC565
W1294NC500	5000	1294	W5*	SW50CXC500
W1294NC600	6000	1294	W5*	SW60CXC500
W1294ND500	5000	1294	W37	SW50DXC500
W1294ND600	6000	1294	W37	SW60DXC500
W1411LC300	3000	1411	W4	SW30CXC595
W1411LC360	3600	1411	W4	SW36CXC595
W1520NC500	5000	1478	W5*	SW50CXC620
W1520NC600	6000	1478	W5*	SW60CXC620
W1524LC240	2400	1524	W4	SW24CXC635
W1524LC300	3000	1524	W4	SW30CXC635
W1608NC400	4000	1608	W5*	SW40CXC680
W1608NC500	5000	1608	W5*	SW50CXC680
W1748LC080	800	1748	W4	SW08CXC805
W1748LC180	1800	1748	W4	SW18CXC805
W1748LC220	2200	1748	W4	SW22CXC805
W1748LC250	2500	1748	W4	SW25CXC805
W1856NC400	4000	1856	W5*	SW40CXC815
W1856NC500	5000	1856	W5*	SW50CXC815
W2020NC360	3600	2020	W5*	SW36CXC818
W2020NC450	4500	2020	W5*	SW45CXC818
W2052NC300	3000	2052	W5*	SW30CXC820
W2052NC400	4000	2052	W5*	SW40CXC820
W2054NC360	3600	2054	W5*	SW36CXC920
W2054NC450	4500	2054	W5*	SW45CXC920
W2058LC020	200	2058	W4	SW02CXC935
W2058LC100	1000	2058	W4	SW10CXC935
W2058LC120	1200	2058	W4	SW12CXC935
W2058LC140	1400	2058	W4	SW14CXC935
W2134NC300	3000	2134	W5*	SW30CXC930
W2134NC400	4000	2134	W5*	SW40CXC930
W2416NC160	1600	2416	W5*	SW16CXC950
W2416NC200	2000	2416	W5*	SW20CXC950
W2416NC250	2500	2416	W5*	SW25CXC950
W2624NC160	1600	2624	W5*	SW16CXC11C

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
W2624NC200	2000	2624	W5*	SW20CXC11C
W2624NC250	2500	2624	W5*	SW25CXC11C
W2664NC300	3000	2664	W5*	SW30CXC1170
W2664NC400	4000	2664	W5*	SW40CXC1170
W2820VC360	3600	2820	W6	SW36CXC1100
W2820VC450	4500	2820	W6	SW45CXC1100
W2820VF360	3600	2820	W43	SW36FXC1100
W2820VF450	4500	2820	W43	SW45FXC1100
W2899MC320	3200	2899	W54	WX166MC320
W2899MC360	3600	2899	W54	WX166MC360
W2899MC400	4000	2899	W54	WX166MC400
W2899MC420	4200	2899	W54	WX166MC420
W2899MC480	4800	2899	W54	WX166MC480
W2958NC280	2800	2958	W5*	SW28CXC12C
W2958NC350	3500	2958	W5*	SW35CXC12C
W3082MC420	4200	3082	W54	WX253MC420
W3082MC450	4500	3082	W54	WX253MC450
W3128VC300	3000	3128	W6	SW30CXC13C
W3128VC400	4000	3128	W6	SW40CXC13C
W3128VF300	3000	3128	W43	SW30FXC13C
W3128VF400	4000	3128	W43	SW40FXC13C
W3270NC080	800	3270	W5*	SW08CXC14C
W3270NC160	1600	3270	W5*	SW16CXC14C
W3270NC200	2000	3270	W5*	SW20CXC14C
W3270NC220	2200	3270	W5*	SW22CXC14C
W3477MC360	3600	3477	W54	WX252MC360
W3477MC400	4000	3477	W54	WX252MC400
W3697VC160	1600	3697	W6	SW16CXC16C
W3697VC220	2200	3697	W6	SW22CXC16C
W3697VC280	2800	3697	W6	SW28CXC16C
W3697VF160	1600	3697	W43	SW16FXC16C
W3697VF220	2200	3697	W43	SW22FXC16C
W3697VF280	2800	3697	W43	SW28FXC16C
W3708MC320	3200	3708	W54	WX251MC320
W3708MC350	3500	3708	W54	WX251MC350
W3743ZC400	4000	3743	W7	SW40CXC15C
W3743ZC450	4500	3743	W7	SW45CXC15C
W3743ZC500	5000	3743	W7	SW50CXC15C
W3743ZD400	4000	3743	W42	SW40DXC15C
W3743ZD450	4500	3743	W42	SW45DXC15C
W3743ZD500	5000	3743	W42	SW50DXC15C
W3841VC300	3000	3841	W6	SW30CXC17C
W3841VC340	3400	3841	W6	SW34CXC17C
W3841VF300	3000	3841	W43	SW30FXC17C
W3841VF340	3400	3841	W43	SW34FXC17C
W3842MC160	1600	3842	W54	WX199MC160
W3842MC200	2000	3842	W54	WX199MC200
W3842MC240	2400	3842	W54	WX199MC240
W3842MC280	2800	3842	W54	WX199MC280
W4096ZC340	3400	4096	W7	SW34CXC1870
W4096ZC450	4500	4096	W7	SW45CXC1870
W4096ZD340	3400	4096	W42	SW34DXC1870
W4096ZD450	4500	4096	W42	SW45DXC1870
W4307ZC200	2000	4307	W7	SW20CXC20C
W4307ZC240	2400	4307	W7	SW24CXC20C
W4307ZC300	3000	4307	W7	SW30CXC20C

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
W4307ZD200	2000	4307	W42	SW20DXC20C
W4307ZD240	2400	4307	W42	SW24DXC20C
W4307ZD300	3000	4307	W42	SW30DXC20C
W4534NC020	200	4543	W5*	SW02CXC19C
W4534NC060	600	4543	W5*	SW06CXC19C
W4534ND020	200	4543	W37	SW02DXC19C
W4534ND060	600	4543	W37	SW06DXC19C
W5092ZC240	2400	5092	W7	SW24CXC18C
W5092ZC280	2800	5092	W7	SW28CXC18C
W5092ZC320	3200	5092	W7	SW32CXC18C
W5092ZC350	3500	5092	W7	SW35CXC18C
W5092ZD240	2400	5092	W42	SW24DXC18C
W5092ZD280	2800	5092	W42	SW28DXC18C
W5092ZD320	3200	5092	W42	SW32DXC18C
W5092ZD350	3500	5092	W42	SW35DXC18C
W5282ZC200	2000	5282	W7	SW20CXC21C
W5282ZC240	2400	5282	W7	SW24CXC21C
W5282ZC300	3000	5282	W7	SW30CXC21C
W5282ZD200	2000	5282	W42	SW20DXC21C
W5282ZD240	2400	5282	W42	SW24DXC21C
W5282ZD300	3000	5282	W42	SW30DXC21C
W5292TC500	5000	5292	W28	WX043TC500
W5292TC560	5600	5292	W28	WX043TC560
W5292TD500	5000	5292	W29	WX043TD500
W5292TD560	5600	5292	W29	WX043TD560
W5439VC020	200	5439	W6	SW02CXC22C
W5439VC100	1000	5439	W6	SW10CXC22C
W5439VC140	1400	5439	W6	SW14CXC22C
W5439VF020	200	5439	W43	SW02FXC22C
W5439VF100	1000	5439	W43	SW10FXC22C
W5439VF140	1400	5439	W43	SW14FXC22C
W5696VC020	200	5696	W6	SW02CXC27C
W5696VC100	1000	5696	W6	SW10CXC27C
W5696VC140	1400	5696	W6	SW14CXC27C
W5696VF020	200	5696	W43	SW02FXC27C
W5696VF100	1000	5696	W43	SW10FXC27C
W5696VF140	1400	5696	W43	SW14FXC27C
W5838ZC120	1200	5838	W7	SW12CXC26C
W5838ZC180	1800	5838	W7	SW18CXC26C
W5838ZC220	2200	5838	W7	SW22CXC26C
W5838ZD120	1200	5838	W42	SW12DXC26C
W5838ZD180	1800	5838	W42	SW18DXC26C
W5838ZD220	2200	5838	W42	SW22DXC26C
W6262ZC120	1200	6262	W7	SW12CXC2850
W6262ZC200	2000	6262	W7	SW20CXC2850
W6262ZC240	2400	6262	W7	SW24CXC2850
W6262ZD120	1200	6262	W42	SW12DXC2850
W6262ZD200	2000	6262	W42	SW20DXC2850
W6262ZD240	2400	6262	W42	SW24DXC2850
W6908FC450	4500	6908	W52	N/A
W6908FC500	5000	6908	W52	N/A
W6908FD450	4500	6908	W59	N/A
W6908FD500	5000	6908	W59	N/A
W7675ZC020	200	7675	W7	SW02CXC30C
W7675ZC100	1000	7675	W7	SW10CXC30C
W7675ZC140	1400	7675	W7	SW14CXC30C

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
W7675ZD020	200	7675	W42	SW02DXC30C
W7675ZD100	1000	7675	W42	SW10DXC30C
W7675ZD140	1400	7675	W42	SW14DXC30C
W8405ZC020	200	8405	W7	SW02CXC32C
W8405ZC100	1000	8405	W7	SW10CXC32C
W8405ZC140	1400	8405	W7	SW14CXC32C
W8405ZD020	200	8405	W42	SW02DXC32C
W8405ZD100	1000	8405	W42	SW10DXC32C
W8405ZD140	1400	8405	W42	SW14DXC32C
W104CFC200	2000	10434	W52	N/A
W104CFC220	2200	10434	W52	N/A
W104CFD200	2000	10434	W59	N/A
W104CFD220	2200	10434	W59	N/A
WX248MC030	300	248	W54	N/A
WX248MC060	600	248	W54	N/A
WX249MC120	1200	248	W54	N/A
WX249MC150	1500	249	W54	N/A
WX250MC180	1800	250	W54	N/A
WX250MC220	2200	250	W54	N/A
WX254MC520	5200	254	W54	N/A
WX254MC600	6000	254	W54	N/A
W7032DB008	80	7032	W49	WX173DB008
W7032DB012	120	7032	W49	WX173DB012
W7032DB020	200	7032	W49	WX173DB020
WX198PB008	80	198	W38	N/A
WX198PB012	120	198	W38	N/A
WX198PB020	200	198	W38	N/A
W3455QK200	2000	3455	Wd2	WX181QK200
W3455QK220	2200	3455	Wd2	WX181QK220
W4693QK050	500	4693	Wd2	WX183QK050
W4693QK080	800	4693	Wd2	WX183QK080
W4713HL300	3000	4713	Wd5	WX207HL300
W4713HL350	3500	4713	Wd5	WX207HL350
W4713HM300	3000	4713	Wd6	WX207HM300
W4713HM350	3500	4713	Wd6	WX207HM350
W5334MK200	2000	5334	Wd3	W4987MK200
W5334MK220	2200	5334	Wd3	W4987MK220
WX210MK050	500	180	Wd3	N/A
WX210MK080	800	180	Wd3	N/A
TBA	TBA	TBA	Wd4	N/A
M0130RL200	2000	130	W20	SM20MCR094
M0130RL250	2500	130	W20	SM25MCR094
M0130SL200	2000	130	W20	SM20MCN094
M0130SL250	2500	130	W20	SM25MCN094
M0130RM200	2000	130	W21	N/A
M0130RM250	2500	130	W21	N/A
M0130SM200	2000	130	W21	N/A
M0130SM250	2500	130	W21	N/A
M0139RL120	1200	139	W20	N/A
M0139RL180	1800	139	W20	N/A
M0139SL120	1200	139	W20	N/A
M0139SL180	1800	139	W20	N/A
M0139RM120	1200	139	W21	SM12PHR100
M0139RM180	1800	139	W21	SM18PHR100

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
M0139SM120	1200	139	W21	SM12PHN100
M0139SM180	1800	139	W21	SM18PHN100
M0268RC200	2000	268	W24	SM20PHR134
M0268RC250	2500	268	W24	SM25PHR134
M0268SC200	2000	268	W24	SM20PHN134
M0268SC250	2500	268	W24	SM25PHN134
M0268RJ200	2000	268	W22	SM20PCR134
M0268RJ250	2500	268	W22	SM25PCR134
M0268SJ200	2000	268	W22	SM20PCN134
M0268SJ250	2500	268	W22	SM25PCN134
M0280RC200	2000	280	W24	SM20PHR144
M0280RC250	2500	280	W24	SM25PHR144
M0280SC200	2000	280	W24	SM20PHN144
M0280SC250	2500	280	W24	SM25PHN144
M0280RJ200	2000	280	W22	SM20PCR144
M0280RJ250	2500	280	W22	SM25PCR144
M0280SJ200	2000	280	W22	SM20PCN144
M0280SJ250	2500	280	W22	SM25PCN144
M0334RC120	1200	334	W24	SM12PHR174
M0334RC200	2000	334	W24	SM20PHR174
M0334SC120	1200	334	W24	SM12PHN174
M0334SC200	2000	334	W24	SM20PHN174
M0334RJ120	1200	334	W22	N/A
M0334RJ200	2000	334	W22	N/A
M0334SJ120	1200	334	W22	N/A
M0334SJ200	2000	334	W22	N/A
M0336RA120	1200	336	W23	SM12PHR170
M0336RA140	1400	336	W23	SM14PHR170
M0336SA120	1200	336	W23	SM12PHN170
M0336SA140	1400	336	W23	SM14PHN170
M0588LC400	4000	588	W4	SM40CXC344
M0588LC450	4500	588	W4	SM45CXC344
M0790YC200	2000	790	W2	SM20CXC294
M0790YC250	2500	790	W2	SM25CXC294
M0790YH200	2000	790	W3	N/A
M0790YH250	2500	790	W3	N/A
M0914LC200	2000	914	W4	SM20CXC804
M0914LC250	2500	914	W4	SM25CXC804
M1010NC400	4000	1010	W5	SM40CXC604
M1010NC450	4500	1010	W5	SM45CXC604
M1163NC400	4000	1163	W5	SM40CXC614
M1163NC450	4500	1163	W5	SM45CXC614
M1502NC200	2000	1502	W5	SM20CXC334
M1502NC250	2500	1502	W5	SM25CXC334
M1502ND200	2000	1502	W37	N/A
M1502ND250	2500	1502	W37	N/A
M1583VC400	4000	1583	W6	SM40CXC864
M1583VC450	4500	1583	W6	SM45CXC864
M1583VF400	4000	1583	W43	SM40FXC864
M1583VF450	4500	1583	W43	SM45FXC864
M1609NC200	2000	1609	W5	SM20CXC915
M1609NC260	2600	1609	W5	SM26CXC915
M2273VC300	3000	2273	W6	N/A
M2273VC360	3600	2273	W6	N/A
M2273VF300	3000	2273	W43	N/A

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
M2273VF360	3600	2273	W43	N/A
M2408NC020	200	2408	W5	SM02CXC504
M2408NC060	600	2408	W5	SM06CXC504
M2408ND020	200	2408	W37	N/A
M2408ND060	600	2408	W37	N/A
M2639ZC360	3600	2639	W7	SM36CXC954
M2639ZC420	4200	2639	W7	SM42CXC954
M2639ZC450	4500	2639	W7	SM45CXC954
M2639ZD360	3600	2639	W42	SM36DXC954
M2639ZD420	4200	2639	W42	SM42DXC954
M2639ZD450	4500	2639	W42	SM45DXC954
M2698ZC250	2500	2698	W7	SM25CXC964
M2698ZC280	2800	2698	W7	SM28CXC964
M2698ZC350	3500	2698	W7	SM35CXC964
M2698ZD250	2500	2698	W42	SM25DXC964
M2698ZD280	2800	2698	W42	SM28DXC964
M2698ZD350	3500	2698	W42	SM35DXC964
M2837VC180	1800	2837	W6	SM18CXC968
M2837VC250	2500	2837	W6	SM25CXC968
M2837VF180	1800	2837	W43	SM18FXC968
M2837VF250	2500	2837	W43	SM25FXC968
M3770ZC200	2000	3770	W7	SM20CXC974
M3770ZC240	2400	3770	W7	SM24CXC974
M3770ZC300	3000	3770	W7	SM30CXC974
M3770ZD200	2000	3770	W42	SM20DXC974
M3770ZD240	2400	3770	W42	SM24DXC974
M3770ZD300	3000	3770	W42	SM30DXC974
M0225YH300	3000	225	W3	SM30HXC084
M0225YH360	3600	225	W3	SM36HXC084
M0225YH450	4500	225	W3	SM45HXC084
M0310YH300	3000	310	W3	SM30HXC103
M0310YH350	3500	310	W3	SM35HXC103
M0347WC160	1600	347	W1	SM16CXC134
M0347WC200	2000	347	W1	SM20CXC134
M0347WC250	2500	347	W1	SM25CXC134
M0358WC120	1200	358	W1	SM12CXC100
M0358WC180	1800	358	W1	SM18CXC100
M0367WC140	1400	367	W1	SM14CXC144
M0367WC220	2200	367	W1	SM22CXC144
M0367WC280	2800	367	W1	SM28CXC144
M0371YH350	3500	371	W3	SM35HXC164
M0371YH450	4500	371	W3	SM45HXC164
M0433WC120	1200	433	W1	SM12CXC174
M0433WC160	1600	433	W1	SM16CXC174
M0433WC200	2000	433	W1	SM20CXC174
M0437WC080	800	437	W1	SM08CXC170
M0437WC140	1400	437	W1	SM14CXC170
M0451YC120	1200	451	W2	SM12CXC176
M0451YC160	1600	451	W2	SM16CXC176
M0451YC200	2000	451	W2	SM20CXC176
M0451YH120	1200	451	W3	N/A
M0451YH160	1600	451	W3	N/A
M0451YH200	2000	451	W3	N/A
M0659LC400	4000	659	W4	SM40CXC364
M0659LC450	4500	659	W4	SM45CXC364

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
M0710LC560	5600	710	W4	SM56CXC274
M0710LC600	6000	710	W4	SM60CXC274
M0736LC400	4000	736	W4	SM40CXC374
M0736LC450	4500	736	W4	SM45CXC374
M0759YC040	400	759	W2	SM04CXC190
M0759YC120	1200	759	W2	SM12CXC190
M0759YC160	1600	759	W2	SM16CXC190
M0759YH040	400	759	W3	N/A
M0759YH120	1200	759	W3	N/A
M0759YH160	1600	759	W3	N/A
M0859LC140	1400	859	W4	SM14CXC220
M0859LC160	1600	859	W4	SM16CXC220
M0863LC260	2600	863	W4	SM26CXC474
M0863LC300	3000	863	W4	SM30CXC474
M0863LC360	3600	863	W4	SM36CXC474
M0872LC140	1400	872	W4	SM14CXC224
M0872LC180	1800	872	W4	SM18CXC224
M0872LC210	2100	872	W4	SM21CXC224
M0955LC200	2000	955	W4	SM20CXC524
M0955LC250	2500	955	W4	SM25CXC524
M1022LC120	1200	1022	W4	SM12CXC724
M1022LC160	1600	1022	W4	SM16CXC724
M1022LC200	2000	1022	W4	SM20CXC724
M1080LC100	1000	1080	W4	SM10CXC314
M1080LC120	1200	1080	W4	SM12CXC314
M1102NC500	5000	1102	W5	SM50CXC574
M1102NC600	6000	1102	W5	SM60CXC574
M1104NC400	4000	1104	W5	SM40CXC624
M1104NC450	4500	1104	W5	SM45CXC624
M1242NC260	2600	1242	W5	SM26CXC824
M1242NC360	3600	1242	W5	SM36CXC824
M1242ND260	2600	1242	W37	SM26CXC824
M1242ND360	3600	1242	W37	SM36CXC824
M1494NC160	1600	1494	W5	SM16CXC924
M1494NC250	2500	1494	W5	SM25CXC924
M1565VC400	4000	1565	W6	SM40CXC394
M1565VC450	4500	1565	W6	SM45CXC394
M1565VF400	4000	1565	W43	SM40FXC394
M1565VF450	4500	1565	W43	SM45FXC394
M1858NC120	1200	1858	W5	SM12CXC514
M1858NC160	1600	1858	W5	SM16CXC514
M2322ZC300	3000	2322	W7	SM30CXC384
M2322ZC400	4000	2322	W7	SM40CXC384
M2322ZD300	3000	2322	W42	SM30DXC384
M2322ZD400	4000	2322	W42	SM40DXC384
M2413VC200	2000	2413	W6	MX070VC200
M2413VC250	2500	2413	W6	MX070VC250
M2413VF200	2000	2413	W43	N/A
M2413VF250	2500	2413	W43	N/A
F0240YC250	2500	240	W3	N/A
F0240YC300	3000	240	W3	N/A
F0240YH250	2500	240	W2	N/A
F0240YH300	3000	240	W2	N/A
F0300WC140	1400	240	W1	F0258WC140
F0300WC180	1800	240	W1	F0258WC180

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
F0800LC140	1400	775	W4	F0400LC140
F0800LC180	1800	775	W4	F0400LC180
F0900VC450	4500	816	W6	FX055VC450
F0900VC520	5200	816	W6	FX055VC520
F0900VF450	4500	816	W43	FX055VF450
F0900VF520	5200	816	W43	FX055VF520
F1000LC080	800	826	W4	F0500LC080
F1000LC120	1200	826	W4	F0500LC120
F1300NC45P	4500	1346	W5	N/A
F1300NC50P	5000	1346	W5	N/A
F1300NC55P	5500	1346	W5	N/A
F1400NC140	1400	1093	W5	FX004NC140
F1400NC180	1800	1093	W5	FX004NC180
F1500NC200	2000	1054	W5	FX056NC200
F1500NC250	2500	1054	W5	FX056NC250
F1600NC080	800	1326	W5	FX021NC080
F1600NC120	1200	1326	W5	FX021NC120
E0300YH400	277	2630	W3	4000
E0300YH450	277	2630	W3	4500
E0400YH200	348	3550	W3	2000
E0400YH250	348	3550	W3	2500
E0900NC400	969	15270	W5	4000
E0900NC450	969	15270	W5	4500
E0900NH400	969	15270	W47	4000
E0900NH450	969	15270	W47	4500
E1500NC200	1557	15180	W5	2000
E1500NC250	1557	15180	W5	2500
E1500NH200	1557	15180	W47	2000
E1500NH250	1557	15180	W47	2500
E1500VF400	1918	23600	W43	4000
E1500VF450	1918	23600	W43	4500
E1500NC36P	1280	17050	W5	3600
E1500NC42P	1280	17050	W5	4200
E1500NC48P	1280	17050	W5	4800
E1500NH36P	1280	17050	W47	3600
E1500NH42P	1280	17050	W47	4200
E1500NH48P	1280	17050	W47	4800
E2000NC140	1568	15000	W5	1400
E2000NC170	1568	15000	W5	1700
E2000NH140	1568	15000	W47	1400
E2000NH170	1568	15000	W47	1700
E2400TC400	2227	25600	W28	4000
E2400TC450	2227	25600	W28	4500
E2500VF200	2516	28600	W43	2000
E2500VF250	2516	28600	W43	2500
N0131SH120	1200	131	W17	N086PH12
N0131SH160	1600	131	W17	N086PH16
N0131SJ120	1200	131	W16	N086RH12
N0131SJ160	1600	131	W16	N086RH16
N0180SH120	1200	180	W17	N105PH12
N0180SH160	1600	180	W17	N105PH16
N0180SJ120	1200	180	W16	N105RH12
N0180SJ160	1600	180	W16	N105RH16
N0290SC120	1200	290	W18	N170PH12

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
N0290SC160	1600	290	W18	N170PH16
N0290SD120	1200	290	W19	N/A
N0290SD160	1600	290	W19	N/A
N0290SG120	1200	290	W25	N/A
N0290SG160	1600	290	W25	N/A
N0335SC120	1200	335	W18	N195PH12
N0335SC160	1600	335	W18	N195PH16
N0335SD120	1200	335	W19	N/A
N0335SD160	1600	335	W19	N/A
N0335SG120	1200	335	W25	N/A
N0335SG160	1600	335	W25	N/A
N0416SC020	200	416	W18	N275PH02
N0416SC080	800	416	W18	N275PH08
N0416SD020	200	416	W19	N/A
N0416SD080	800	416	W19	N/A
N0416SG020	200	416	W25	N/A
N0416SG080	800	416	W25	N/A
N0194WC120	1200	194	W8	N086CH12
N0194WC160	1600	194	W8	N086CH16
N0255WC120	1200	255	W8	N105CH12
N0255WC160	1600	255	W8	N105CH16
N0339WC120	1200	339	W8	N170CH12
N0339WC160	1600	339	W8	N170CH16
N0392WC120	1200	392	W8	N195CH12
N0392WC160	1600	392	W8	N195CH16
N0491WC020	200	491	W8	N275CH02
N0491WC080	800	491	W8	N275CH08
N0606YS200	2000	606	W9	N282SH20
N0606YS250	2500	606	W9	N/A
N0616LC400	4000	616	W10	N255CH40
N0616LC450	4500	616	W10	N255CH45
N0634LC380	3800	634	W10	N257CH38
N0634LC420	4200	634	W10	N257CH42
N0646LC300	3000	646	W10	N260CH30
N0646LC360	3600	646	W10	N260CH36
N0676YS120	1200	676	W9	N281SH12
N0676YS180	1800	676	W9	N281SH18
N0734YS120	1200	734	W9	N280SH12
N0734YS160	1600	734	W9	N280SH16
N0782YS120	1200	782	W9	N283SH12
N0782YS160	1600	782	W9	N283SH16
N0882NC400	4000	882	W11	N320CH40
N0882NC450	4500	882	W11	N320CH45
N0910LS200	2000	910	W60	N330SH20
N0910LS260	2600	910	W60	N330SH26
N0992YS020	200	992	W9	N310SH02
N0992YS060	600	992	W9	N310SH06
N1010NC300	3000	1010	W11	N360CH30
N1010NC380	3800	1010	W11	N360CH38
N1042LS120	1200	1042	W60	N350SH12
N1042LS180	1800	1042	W60	N350SH18
N1114LS120	1200	1114	W60	N370SH12
N1114LS180	1800	1114	W60	N370SH18
N1132NC300	3000	1132	W11	N390CH30
N1132NC320	3200	1132	W11	N390CH32

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
N1159NC380	3800	1159	W11	N500CH38
N1159NC420	4200	1159	W11	N500CH42
N1265LS120	1200	1226	W60	N520SH12
N1265LS160	1600	1226	W60	N520SH16
N1297NS200	2000	1297	W61	N450SH20
N1297NS260	2600	1297	W61	N450SH26
N1314NC300	3000	1314	W11	N570CH30
N1314NC360	3600	1314	W11	N570CH36
N1351VC400	4000	1351	W12	N560CH40
N1351VC450	4500	1351	W12	N560CH45
N1351VF400	4000	1351	W62	N/A
N1351VF450	4500	1351	W62	N/A
N1467NS200	2000	1467	W61	N490SH20
N1467NS260	2600	1467	W61	N490SH26
N1479NS240	2400	1436	W61	N620SH24
N1479NS300	3000	1436	W61	N620SH30
N1547NS160	1600	1547	W61	N510SH16
N1547NS200	2000	1547	W61	N510SH20
N1588NS200	2000	1588	W61	N680SH20
N1588NS260	2600	1588	W61	N680SH26
N1661VC300	3000	1661	W12	N630CH30
N1661VC360	3600	1661	W12	N630CH36
N1661VF300	3000	1661	W62	N/A
N1661VF360	3600	1661	W62	N/A
N1712VC240	2400	1712	W12	N640CH24
N1712VC300	3000	1712	W12	N640CH30
N1712VF240	2400	1712	W62	N/A
N1712VF300	3000	1712	W62	N/A
N1718NS120	1200	1718	W61	N540SH12
N1718NS180	1800	1718	W61	N540SH18
N1718NS200	2000	1718	W61	N/A
N1802NS120	1200	1802	W61	N600SH12
N1802NS160	1600	1802	W61	N600SH16
N2046NS120	1200	2046	W61	N740SH12
N2046NS160	1600	2046	W61	N740SH16
N2086NS060	600	2086	W61	N610SH06
N2086NS100	1000	2086	W61	N610SH10
N2172ZC400	4000	2172	W13	N750CH40
N2172ZC450	4500	2172	W13	N750CH45
N2172ZD400	4000	2172	W46	N750DH40
N2172ZD450	4500	2172	W46	N750DH45
N2293VC180	1800	2293	W12	N760CH18
N2293VC220	2200	2293	W12	N760CH22
N2293VF180	1800	2293	W62	N/A
N2293VF220	2200	2293	W62	N/A
N2418ZC300	3000	2418	W13	N850CH30
N2418ZC360	3600	2418	W13	N850CH36
N2418ZD300	3000	2418	W46	N/A
N2418ZD360	3600	2418	W46	N/A
N2500VC120	1200	2500	W12	N990CH12
N2500VC160	1600	2500	W12	N990CH16
N2500VF120	1200	2500	W62	N/A
N2500VF160	1600	2500	W62	N/A
N2543ZC240	2400	2543	W13	N880CH24
N2543ZC300	3000	2543	W13	N880CH30
N2543ZD240	2400	2543	W46	N/A

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
N2543ZD300	3000	2543	W46	N/A
N3012ZC200	2000	3012	W13	N900CH20
N3012ZC260	2600	3012	W13	N900CH26
N3012ZD200	2000	3012	W46	N/A
N3012ZD260	2600	3012	W46	N/A
N3022ZC160	1600	3022	W13	N980CH160
N3022ZC220	2200	3022	W13	N980CH220
N3022ZD160	1600	3022	W46	N/A
N3022ZD220	2200	3022	W46	N/A
N3029ZC240	2400	3029	W13	N/A
N3029ZC280	2800	3029	W13	N/A
N3029ZD240	2400	3029	W46	N/A
N3029ZD280	2800	3029	W46	N/A
N3476TC360	3600	3476	W14	N1463CH36
N3476TC420	4200	3476	W14	N1463CH42
N3476TD360	3600	3476	W51	N1463DH36
N3476TD420	4200	3476	W51	N1463DH42
N3533ZC140	1400	3533	W13	N1400CH14
N3533ZC200	2000	3533	W13	N1400CH20
N3533ZC220	2200	3533	W13	N1400CH22
N3533ZD140	1400	3533	W46	N/A
N3533ZD200	2000	3533	W46	N/A
N3533ZD220	2200	3533	W46	N/A
N3839TC300	3000	3839	W14	N1663CH30
N3839TC350	3500	3839	W14	N1663CH35
N3839TD300	3000	3839	W51	N1663DH30
N3839TD350	3500	3839	W51	N1663DH35
N3930ZC120	1200	3930	W13	NX188ZC120
N3930ZC160	1600	3930	W13	NX188ZC160
N3930ZD120	1200	3930	W46	NX188ZD120
N3930ZD160	1600	3930	W46	NX188ZD160
N4085ZC080	800	4085	W13	N1600CH08
N4085ZC120	1200	4085	W13	N1600CH12
N4085ZD080	800	4085	W46	N/A
N4085ZD120	1200	4085	W46	N/A
N4151FC360	3600	4151	W15	N1483CH36
N4151FC420	4200	4151	W15	N1483CH42
N4151FD360	3600	4151	W48	N1483DH36
N4151FD420	4200	4151	W48	N1483DH42
N4400TC120	1200	4400	W14	N1863CH12
N4400TC220	2200	4400	W14	N1863CH22
N4400TC280	2800	4400	W14	N1863CH28
N4400TD120	1200	4400	W51	N1863DH12
N4400TD220	2200	4400	W51	N1863DH22
N4400TD280	2800	4400	W51	N1863DH28
N4803FC300	3000	4803	W15	N1683CH30
N4803FC350	3500	4803	W15	N1683CH35
N4803FD300	3000	4803	W48	N/A
N4803FD350	3500	4803	W48	N/A
N5177FC200	2000	5177	W15	N1883CH20
N5177FC280	2800	5177	W15	N1883CH28
N5177FD200	2000	5177	W48	N/A
N5177FD280	2800	5177	W48	N/A
N5946FC180	1800	5946	W15	N1983CH18
N5946FC220	2200	5946	W15	N1983CH22
N5946FD180	1800	5946	W48	N/A

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
N5946FD220	2200	5946	W48	N/A
NX037VC200	2000	2102	W12	N/A
NX037VC260	2600	2102	W12	N/A
NX037VF200	2000	2102	W62	N/A
NX037VF260	2600	2102	W62	N/A
N1174JK200	2000	1174	Wp1	NX159JK200
N1174JK220	2200	1174	Wp1	NX159JK220
N1263JK160	1600	1263	Wp1	NX159JK160
N1263JK180	1800	1263	Wp1	NX159JK180
N1366JK080	800	1366	Wp1	NX159JK080
N1366JK120	1200	1366	Wp1	NX159JK120
N1366JK140	1400	1366	Wp1	NX159JK140
N1651QK200	2000	1651	Wp2	NX058QK200
N1651QK220	2200	1651	Wp2	NX058QK220
N1806QK160	1600	1806	Wp2	NX058QK160
N1806QK180	1800	1806	Wp2	NX058QK180
N2083QK080	800	2083	Wp2	N/A
N2083QK120	1200	2083	Wp2	N/A
N2083QK140	1400	2083	Wp2	N/A
N2154JK020	200	2154	Wp1	NX159JK020
N2154JK040	400	2154	Wp1	NX159JK040
N2154JK060	600	2154	Wp1	NX159JK060
N2367MK200	2000	2367	Wp3	NX149MK200
N2367MK220	2200	2367	Wp3	NX149MK220
N2593MK160	1600	2593	Wp3	NX149MK160
N2593MK180	1800	2593	Wp3	NX149MK180
N3022MK040	400	3022	Wp3	NX149MK040
N3022MK120	1200	3022	Wp3	NX149MK120
N3022MK140	1400	3022	Wp3	NX149MK140
N3229QK020	200	3229	Wp2	NX155QK020
N3229QK040	400	3229	Wp2	NX155QK040
N3229QK060	600	3229	Wp2	NX155QK060
N3904HK200	2000	3904	Wp4	NX160HK200
N3904HK220	2200	3904	Wp4	NX160HK220
N4316MK020	200	4316	Wp3	N4004MK020
N4316MK040	400	4316	Wp3	N4004MK040
N4316MK060	600	4316	Wp3	N/A
N4472HK160	1600	4472	Wp4	N/A
N4472HK180	1800	4472	Wp4	N/A
N6974HK020	200	6974	Wp4	N/A
N6974HK040	400	6974	Wp4	N/A
N6974HK060	600	6974	Wp4	N/A
NX160HK080	800	0.009	Wp4	N/A
NX160HK120	1200	0.009	Wp4	N/A
NX160HK140	1400	0.009	Wp4	N/A
K0349LC600	6000	349	W10	P201CH60
K0349LC650	6500	349	W10	P201CH65
K0349LG600	6000	349	W56	N/A
K0349LG650	6500	349	W56	N/A
K0443LC600	6000	443	W10	N/A
K0443LC650	6500	443	W10	N/A
K0443LG600	6000	443	W56	N/A
K0443LG650	6500	443	W56	N/A

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
K0682LC360	3600	682	W10	KX190LC360
K0682LC420	4200	682	W10	KX190LC420
K0682LG360	3600	682	W56	N/A
K0682LG420	4200	682	W56	N/A
K0769NC600	6000	769	W11	P410CH60
K0769NC650	6500	769	W11	P410CH65
K0769NG600	6000	769	W57	N/A
K0769NG650	6500	769	W57	N/A
K0890NC360	3600	890	W11	R295CH36
K0890NC420	4200	890	W11	R295CH42
K1120NC360	3600	1120	W11	KX192NC360
K1120NC420	4200	1120	W11	KX192NC420
K1120NG360	3600	1120	W57	N/A
K1120NG420	4200	1120	W57	N/A
K1121NC320	3200	1121	W11	P440CH32
K1121NC360	3600	1121	W11	P440CH36
K1197NC300	3000	1197	W11	P480CH30
K1197NC320	3200	1197	W11	P480CH32
K1351VC600	6000	1351	W12	KX120VC600
K1351VC650	6500	1351	W12	KX120VC650
K1351VF600	6000	1351	W62	KX120VF600
K1351VF650	6500	1351	W62	KX120VF650
K1947ZC400	4000	1947	W13	P855CH40
K1947ZC440	4400	1947	W13	P855CH44
K1947ZD400	4000	1947	W46	P855DH40
K1947ZD440	4400	1947	W46	P855DH44
K2065VC360	3600	2065	W12	KX162VC360
K2065VC420	4200	2065	W12	KX162VC420
K2065VF360	3600	2065	W62	KX162VF360
K2065VF420	4200	2065	W62	KX120VF650
K2095ZC360	3600	2095	W13	P880CH36
K2095ZC420	4200	2095	W13	P880CH42
K2095ZD360	3600	2095	W46	P880DH36
K2095ZD420	4200	2095	W46	P880DH42
K2359TC600	6000	2359	W14	P1063CH60
K2359TC650	6500	2359	W14	P1063CH65
K2359TD600	6000	2359	W51	N/A
K2359TD650	6500	2359	W51	N/A
K2623TC450	4500	2623	W14	R1263CH45
K2623TC480	4800	2623	W14	R1263CH48
K2623TC520	5200	2623	W14	R1263CH52
K2623TD450	4500	2623	W51	N/A
K2623TD480	4800	2623	W51	N/A
K2623TD520	5200	2623	W51	N/A
K2960TC450	4500	2960	W14	N/A
K2960TC480	4800	2960	W14	N/A
K2960TC520	5200	2960	W14	N/A
K2960TD450	4500	2960	W51	N/A
K2960TD480	4800	2960	W51	N/A
K2960TD520	5200	2960	W51	N/A
K2973FC600	6000	2973	W15	N/A
K2973FC650	6500	2973	W15	N/A
K2973FD600	6000	2973	W48	N/A
K2973FD650	6500	2973	W48	N/A
K3207EC450	4500	3207	W55	KX142EC450
K3207EC480	4800	3207	W55	KX142EC480

WESTCODE

▶Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
K3207EC520	5200	3207	W55	KX142EC520
K3362TC360	3600	3362	W14	N/A
K3362TC420	4200	3362	W14	N/A
K3362TD360	3600	3362	W51	N/A
K3362TD420	4200	3362	W51	N/A
K3503FC450	4500	3503	W15	KX094FC450
K3503FC480	4800	3503	W15	KX094FC480
K3503FC520	5200	3503	W15	KX094FC520
K3503FD450	4500	3503	W48	KX094FD450
K3503FD480	4800	3503	W48	KX094FD480
K3503FD520	5200	3503	W48	KX094FD520
KX101FC360	3600	101	W15	N/A
KX101FC420	4200	101	W15	N/A
KX101FD360	3600	101	W48	N/A
KX101FD420	4200	101	W48	N/A
KX163VC520	5200	163	W12	N/A
KX163VF520	5200	163	W62	N/A
KX191LC520	5200	191	W10	N/A
KX191LG520	5200	191	W56	N/A
KX193NC520	5200	193	W11	N/A
KX193NG520	5200	193	W57	N/A
P0128SH10C	1000	128	W17	N/A
P0128SH10D	1000	128	W17	N/A
P0128SH10E	1000	128	W17	N/A
P0128SH10F	1000	128	W17	N/A
P0128SH12C	1200	128	W17	N/A
P0128SH12D	1200	128	W17	N/A
P0128SH12E	1200	128	W17	N/A
P0128SH12F	1200	128	W17	N/A
P0128SJ10C	1000	128	W16	N/A
P0128SJ10D	1000	128	W16	N/A
P0128SJ10E	1000	128	W16	N/A
P0128SJ10F	1000	128	W16	N/A
P0128SJ12C	1200	128	W16	N/A
P0128SJ12D	1200	128	W16	N/A
P0128SJ12E	1200	128	W16	N/A
P0128SJ12F	1200	128	W16	N/A
P0248SC10D	1000	248	W18	P200PH10
P0248SC10E	1000	248	W18	P200PH10
P0248SC10F	1000	248	W18	P200PH10
P0248SC12D	1200	248	W18	P200PH12
P0248SC12E	1200	248	W18	P200PH12
P0248SC12F	1200	248	W18	P200PH12
P0248SD10D	1000	248	W19	N/A
P0248SD10E	1000	248	W19	N/A
P0248SD10F	1000	248	W19	N/A
P0248SD12D	1200	248	W19	N/A
P0248SD12E	1200	248	W19	N/A
P0248SD12F	1200	248	W19	N/A
P0248SG10D	1000	248	W25	N/A
P0248SG10E	1000	248	W25	N/A
P0248SG10F	1000	248	W25	N/A
P0248SG12D	1200	248	W25	N/A
P0248SG12E	1200	248	W25	N/A
P0248SG12F	1200	248	W25	N/A

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
P0273SC10D	1000	273	W18	P202PH10
P0273SC10E	1000	273	W18	P202PH10
P0273SC10F	1000	273	W18	P202PH10
P0273SC12D	1200	273	W18	P202PH12
P0273SC12E	1200	273	W18	P202PH12
P0273SC12F	1200	273	W18	P202PH12
P0273SD10D	1000	273	W19	N/A
P0273SD10E	1000	273	W19	N/A
P0273SD10F	1000	273	W19	N/A
P0273SD12D	1200	273	W19	N/A
P0273SD12E	1200	273	W19	N/A
P0273SD12F	1200	273	W19	N/A
P0273SG10D	1000	273	W25	N/A
P0273SG10E	1000	273	W25	N/A
P0273SG10F	1000	273	W25	N/A
P0273SG12D	1200	273	W25	N/A
P0273SG12E	1200	273	W25	N/A
P0273SG12F	1200	273	W25	N/A
P0306SC04A	400	306	W18	P214PH04
P0306SC04B	400	306	W18	P214PH04
P0306SC04C	400	306	W18	P214PH04
P0306SC08A	800	306	W18	P214PH08
P0306SC08B	800	306	W18	P214PH08
P0306SC08C	800	306	W18	P214PH08
P0306SD04A	400	306	W19	N/A
P0306SD04B	400	306	W19	N/A
P0306SD04C	400	306	W19	N/A
P0306SD08A	800	306	W19	N/A
P0306SD08B	800	306	W19	N/A
P0306SD08C	800	306	W19	N/A
P0306SG04A	400	306	W25	N/A
P0306SG04B	400	306	W25	N/A
P0306SG04C	400	306	W25	N/A
P0306SG08A	800	306	W25	N/A
P0306SG08B	800	306	W25	N/A
P0306SG08C	800	306	W25	N/A
P0311SC10E	1000	311	W18	P205PH10
P0311SC10F	1000	311	W18	P205PH10
P0311SC10G	1000	311	W18	P205PH10
P0311SC12E	1200	311	W18	P205PH12
P0311SC12F	1200	311	W18	P205PH12
P0311SC12G	1200	311	W18	P205PH12
P0311SD10E	1000	311	W19	N/A
P0311SD10F	1000	311	W19	N/A
P0311SD10G	1000	311	W19	N/A
P0311SD12E	1200	311	W19	N/A
P0311SD12F	1200	311	W19	N/A
P0311SD12G	1200	311	W19	N/A
P0311SG10E	1000	311	W25	N/A
P0311SG10F	1000	311	W25	N/A
P0311SG10G	1000	311	W25	N/A
P0311SG12E	1200	311	W25	N/A
P0311SG12F	1200	311	W25	N/A
P0311SG12G	1200	311	W25	N/A
P0330SC04A	400	330	W18	P215PH04
P0330SC04C	400	330	W18	P215PH04

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
P0330SC04D	400	330	W18	P215PH04
P0330SC06A	600	330	W18	P215PH06
P0330SC06C	600	330	W18	P215PH06
P0330SC06D	600	330	W18	P215PH06
P0330SC08A	800	330	W18	P215PH08
P0330SC08C	800	330	W18	P215PH08
P0330SC08D	800	330	W18	P215PH08
P0330SD04C	400	330	W19	N/A
P0330SD04D	400	330	W19	N/A
P0330SD08C	800	330	W19	N/A
P0330SD08D	800	330	W19	N/A
P0330SG04C	400	330	W25	N/A
P0330SG04D	400	330	W25	N/A
P0330SG08C	800	330	W25	N/A
P0330SG08D	800	330	W25	N/A
P0431SC04C	400	431	W18	P270PH04
P0431SC06C	600	431	W18	P270PH06
P0431SD04C	400	431	W19	N/A
P0431SD06C	600	431	W19	N/A
P0431SG04C	400	431	W25	N/A
P0431SG06C	600	431	W25	N/A
P0295WC12D	1200	295	W8	P200CH12
P0295WC12E	1200	295	W8	P200CH12
P0295WC12F	1200	295	W8	P200CH12
P0327WC08D	800	327	W8	P202CH08
P0327WC08E	800	327	W8	P202CH08
P0327WC08F	800	327	W8	P202CH08
P0327WC10D	1000	327	W8	P202CH10
P0327WC10E	1000	327	W8	P202CH10
P0327WC10F	1000	327	W8	P202CH10
P0327WC12D	1200	327	W8	P202CH12
P0327WC12E	1200	327	W8	P202CH12
P0327WC12F	1200	327	W8	P202CH12
P0366WC04A	400	366	W8	P214CH04
P0366WC04B	400	366	W8	P214CH04
P0366WC04C	400	366	W8	P214CH04
P0366WC04D	400	366	W8	P214CH04
P0366WC06A	600	366	W8	P214CH06
P0366WC06B	600	366	W8	P214CH06
P0366WC06C	600	366	W8	P214CH06
P0366WC06D	600	366	W8	P214CH06
P0366WC08A	800	366	W8	P214CH08
P0366WC08B	800	366	W8	P214CH08
P0366WC08C	800	366	W8	P214CH08
P0366WC08D	800	366	W8	P214CH08
P0367WC12E	1200	367	W8	P205CH12
P0367WC12F	1200	367	W8	P205CH12
P0367WC12G	1200	367	W8	P205CH12
P0389WC04B	400	389	W8	P215CH04
P0389WC04C	400	389	W8	P215CH04
P0389WC04D	400	389	W8	P215CH04
P0389WC08B	800	389	W8	P215CH08
P0389WC08C	800	389	W8	P215CH08
P0389WC08D	800	389	W8	P215CH08
P0515WC04C	400	515	W8	P270CH04
P0515WC04D	400	515	W8	P270CH04

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
P0515WC06C	600	515	W8	P270CH06
P0515WC06D	600	515	W8	P270CH06
P0848YS04B	400	848	W9	P280SH04
P0848YS04C	400	848	W9	P280SH04
P0848YS04D	400	848	W9	P280SH04
P0848YS06B	600	848	W9	P280SH06
P0848YS06C	600	848	W9	P280SH06
P0848YS06D	600	848	W9	P280SH06
P1007LS08D	800	1007	W60	P300SH800
P1007LS08E	800	1007	W60	P300SH800
P1007LS08F	800	1007	W60	P300SH800
P1007LS12D	1200	1007	W60	P300SH12
P1007LS12E	1200	1007	W60	P300SH12
P1007LS12F	1200	1007	W60	P300SH12
R0487YS10D	1000	487	W9	R210SH10
R0487YS10E	1000	487	W9	R210SH10
R0487YS10F	1000	487	W9	R210SH10
R0487YS12D	1200	487	W9	R210SH12
R0487YS12E	1200	487	W9	R210SH12
R0487YS12F	1200	487	W9	R210SH12
R0487YS14D	1400	487	W9	R210SH14
R0487YS14E	1400	487	W9	R210SH14
R0487YS14F	1400	487	W9	R210SH14
R0577YS08C	800	577	W9	R185SH08
R0577YS08D	800	577	W9	R185SH08
R0577YS08E	800	577	W9	R185SH08
R0577YS10C	1000	577	W9	R185SH10
R0577YS10D	1000	577	W9	R185SH10
R0577YS10E	1000	577	W9	R185SH10
R0577YS12C	1200	577	W9	R185SH12
R0577YS12D	1200	577	W9	R185SH12
R0577YS12E	1200	577	W9	R185SH12
R0633YS08D	800	633	W9	R216SH08
R0633YS08E	800	633	W9	R216SH08
R0633YS08F	800	633	W9	R216SH08
R0633YS10D	1000	633	W9	R216SH10
R0633YS10E	1000	633	W9	R216SH10
R0633YS10F	1000	633	W9	R216SH10
R0633YS12D	1200	633	W9	R216SH12
R0633YS12E	1200	633	W9	R216SH12
R0633YS12F	1200	633	W9	R216SH12
R0717LS14G	1400	717	W60	R181SH14
R0717LS14H	1400	717	W60	R181SH14
R0717LS14J	1400	717	W60	R181SH14
R0717LS16G	1600	717	W60	R181SH16
R0717LS16H	1600	717	W60	R181SH16
R0717LS16J	1600	717	W60	R181SH16
R0736LS20J	2000	736	W60	R175SH20
R0736LS20K	2000	736	W60	R175SH20
R0736LS20L	2000	736	W60	R175SH20
R0736LS20M	2000	736	W60	R175SH20
R0736LS22J	2200	736	W60	R175SH22
R0736LS22K	2200	736	W60	R175SH22
R0736LS22M	2200	736	W60	R175SH22
R0736LS25J	2500	736	W60	R175SH25

WESTCODE

▶Parameters

R0736LS25K	2500	736	W60	R175SH25
R0736LS25L	2500	736	W60	R175SH25
R0736LS25M	600	736	W60	R175SH25
R0809LS06A	600	809	W60	R180SH06
R0809LS06B	600	809	W60	R180SH06
R0809LS06C	1000	809	W60	R180SH06
R0809LS10A	1000	809	W60	R180SH10
R0809LS10B	1000	809	W60	R180SH10
R0809LS10C	1000	809	W60	R180SH10
R0830LS10D	1000	830	W60	R190SH10
R0830LS10E	1000	830	W60	R190SH10
R0830LS10F	1000	830	W60	R190SH10
R0830LS10G	1200	830	W60	R190SH10
R0830LS12D	1200	830	W60	R190SH12
R0830LS12E	1200	830	W60	R190SH12
R0830LS12F	1200	830	W60	R190SH12
R0830LS12G	1400	830	W60	R190SH12
R0830LS14D	1400	830	W60	R190SH14
R0830LS14E	1400	830	W60	R190SH14
R0830LS14F	1400	830	W60	R190SH14
R0830LS14G	1600	830	W60	R190SH14
R0878LS16K	1600	878	W60	R200SH16
R0878LS16L	1600	878	W60	R200SH16
R0878LS16M	1800	878	W60	R200SH16
R0878LS18K	1800	878	W60	R200SH18
R0878LS18L	1800	878	W60	R200SH18
R0878LS18M	2000	878	W60	R200SH18
R0878LS20K	2000	878	W60	R200SH20
R0878LS20L	2000	878	W60	R200SH20
R0878LS20M	2100	878	W60	R200SH20
R0878LS21K	2100	878	W60	R200SH21
R0878LS21L	2100	878	W60	R200SH21
R0878LS21M	800	878	W60	R200SH21
R0929LS08A	800	929	W60	R219SH08
R0929LS08B	800	929	W60	R219SH08
R0929LS08C	800	929	W60	R219SH08
R0929LS08D	800	929	W60	R219SH08
R0929LS08E	1000	929	W60	R219SH08
R0929LS10A	1000	929	W60	R219SH10
R0929LS10B	1000	929	W60	R219SH10
R0929LS10C	1000	929	W60	R219SH10
R0929LS10D	1000	929	W60	R219SH10
R0929LS10E	1200	929	W60	R219SH10
R0929LS12A	1200	929	W60	R219SH12
R0929LS12B	1200	929	W60	R219SH12
R0929LS12C	1200	929	W60	R219SH12
R0929LS12D	1200	929	W60	R219SH12
R0929LS12E	800	929	W60	R219SH12
R0964LS08C	800	964	W60	R220SH08
R0964LS08D	800	964	W60	R220SH08
R0964LS08F	1000	964	W60	R220SH08
R0964LS10C	1000	964	W60	R220SH10
R0964LS10D	1000	964	W60	R220SH10
R0964LS10E	1000	964	W60	R220SH10
R0964LS10F	1200	964	W60	R220SH10
R0964LS12C		964	W60	R220SH12

WESTCODE

▶Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
R0964LS12D	1200	964	W60	R220SH12
R0964LS12E	1200	964	W60	R220SH12
R0964LS12F	1200	964	W60	R220SH12
R0990LS04A	400	990	W60	R270SH08
R0990LS04B	400	990	W60	R270SH08
R0990LS04C	400	990	W60	R270SH08
R0990LS06A	600	990	W60	R270SH06
R0990LS06B	600	990	W60	R270SH06
R0990LS06C	600	990	W60	R270SH06
R0990LS08A	800	990	W60	R270SH08
R0990LS08B	800	990	W60	R270SH08
R0990LS08C	800	990	W60	R270SH08
R1124NS18J	1800	1124	W61	R305SH18
R1124NS18K	1800	1124	W61	R305SH18
R1124NS18L	1800	1124	W61	R305SH18
R1124NS18M	1800	1124	W61	R305SH18
R1124NS20J	2000	1124	W61	R305SH20
R1124NS20K	2000	1124	W61	R305SH20
R1124NS20L	2000	1124	W61	R305SH20
R1124NS20M	2000	1124	W61	R305SH20
R1124NS21J	2100	1124	W61	R305SH21
R1124NS21K	2100	1124	W61	R305SH21
R1124NS21L	2100	1124	W61	R305SH21
R1124NS21M	2100	1124	W61	R305SH21
R1127NC32P	3200	1127	W11	D315CH32
R1127NC32R	3200	1127	W11	D315CH32
R1127NC32S	3200	1127	W11	D315CH32
R1127NC32T	3200	1127	W11	D315CH32
R1127NC34S	3400	1127	W11	D315CH34
R1127NC34T	3400	1127	W11	D315CH34
R1127NC36S	3600	1127	W11	D315CH36
R1127NC36T	3600	1127	W11	D315CH36
R1158NS24N	2400	1158	W61	D350SH24
R1158NS24P	2400	1158	W61	D350SH24
R1158NS24T	2400	1158	W61	D350SH24
R1158NS26N	2600	1158	W61	D350SH26
R1158NS26P	2600	1158	W61	D350SH26
R1158NS26T	2600	1158	W61	D350SH26
R1178NS10E	1000	1178	W61	R325SH10
R1178NS10F	1000	1178	W61	R325SH10
R1178NS10G	1000	1178	W61	R325SH10
R1178NS12E	1200	1178	W61	R325SH12
R1178NS12F	1200	1178	W61	R325SH12
R1178NS12G	1200	1178	W61	R325SH12
R1178NS14E	1400	1178	W61	R325SH14
R1178NS14F	1400	1178	W61	R325SH14
R1178NS14G	1400	1178	W61	R325SH14
R1211NS08C	800	1211	W61	R350SH08
R1211NS08D	800	1211	W61	R350SH08
R1211NS08E	800	1211	W61	R350SH08
R1211NS10C	1000	1211	W61	R350SH10
R1211NS10D	1000	1211	W61	R350SH10
R1211NS10E	1000	1211	W61	R350SH10
R1211NS12C	1200	1211	W61	R350SH12
R1211NS12D	1200	1211	W61	R350SH12
R1211NS12E	1200	1211	W61	R350SH12

WESTCODE

▶Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
R1271NS08C	800	1271	W61	R355SH08
R1271NS08D	800	1271	W61	R355SH08
R1271NS08E	800	1271	W61	R355SH08
R1271NS08G	800	1271	W61	R355SH08
R1271NS10C	1000	1271	W61	R355SH10
R1271NS10D	1000	1271	W61	R355SH10
R1271NS10E	1000	1271	W61	R355SH10
R1271NS10G	1000	1271	W61	R355SH10
R1271NS12B	1200	1271	W61	R355SH12
R1271NS12C	1200	1271	W61	R355SH12
R1271NS12D	1200	1271	W61	R355SH12
R1271NS12E	1200	1271	W61	R355SH12
R1271NS12G	1200	1271	W61	R355SH12
R1275NS14J	1400	1275	W61	R395SH14
R1275NS14K	1400	1275	W61	R395SH14
R1275NS14L	1400	1275	W61	R395SH14
R1275NS14M	1400	1275	W61	R395SH14
R1275NS18J	1800	1275	W61	R395SH18
R1275NS18K	1800	1275	W61	R395SH18
R1275NS18L	1800	1275	W61	R395SH18
R1275NS18M	1800	1275	W61	R395SH18
R1275NS20J	2000	1275	W61	R395SH20
R1275NS20K	2000	1275	W61	R395SH20
R1275NS20L	2000	1275	W61	R395SH20
R1275NS20M	2000	1275	W61	R395SH20
R1275NS21J	2100	1275	W61	R395SH21
R1275NS21K	2100	1275	W61	R395SH21
R1275NS21L	2100	1275	W61	R395SH21
R1275NS21M	2100	1275	W61	R395SH21
R1279NS22J	2200	1279	W61	D391SH22
R1279NS22K	2200	1279	W61	D391SH22
R1279NS22L	2200	1279	W61	D391SH22
R1279NS22M	2200	1279	W61	D391SH22
R1279NS25J	2500	1279	W61	D391SH25
R1279NS25K	2500	1279	W61	D391SH25
R1279NS25L	2500	1279	W61	D391SH25
R1279NS25M	2500	1279	W61	D391SH25
R1280NS18K	1800	1280	W61	D390SH18
R1280NS18L	1800	1280	W61	D390SH18
R1280NS18M	1800	1280	W61	D390SH18
R1280NS21K	2100	1280	W61	D390SH21
R1280NS21L	2100	1280	W61	D390SH21
R1280NS21M	2100	1280	W61	D390SH21
R1280NS22K	2200	1280	W61	D390SH22
R1280NS22L	2200	1280	W61	D390SH22
R1280NS22M	2200	1280	W61	D390SH22
R1280NS25K	2500	1280	W61	D390SH25
R1280NS25L	2500	1280	W61	D390SH25
R1280NS25M	2500	1280	W61	D390SH25
R1331NS10B	1000	1331	W61	D450SH10
R1331NS10C	1000	1331	W61	D450SH10
R1331NS10D	1000	1331	W61	D450SH10
R1331NS12B	1200	1331	W61	D450SH12
R1331NS12C	1200	1331	W61	D450SH12
R1331NS12D	1200	1331	W61	D450SH12
R1446NS08C	800	1446	W61	R400SH08

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
R1446NS08E	800	1446	W61	R400SH08
R1446NS08F	800	1446	W61	R400SH08
R1446NS08G	800	1446	W61	R400SH08
R1446NS10C	1000	1446	W61	R400SH10
R1446NS10E	1000	1446	W61	R400SH10
R1446NS10F	1000	1446	W61	R400SH10
R1446NS10G	1000	1446	W61	R400SH10
R1446NS12C	1200	1446	W61	R400SH12
R1446NS12E	1200	1446	W61	R400SH12
R1446NS12F	1200	1446	W61	R400SH12
R1446NS12G	1200	1446	W61	R400SH12
R1448NS14H	1400	1448	W61	D405SH14
R1448NS14J	1400	1448	W61	D405SH14
R1448NS14K	1400	1448	W61	D405SH14
R1448NS14L	1400	1448	W61	D405SH14
R1448NS14M	1400	1448	W61	D405SH14
R1448NS18H	1800	1448	W61	D405SH18
R1448NS18J	1800	1448	W61	D405SH18
R1448NS18K	1800	1448	W61	D405SH18
R1448NS18L	1800	1448	W61	D405SH18
R1448NS18M	1800	1448	W61	D405SH18
R1448NS20H	2000	1448	W61	N/A
R1448NS20J	2000	1448	W61	N/A
R1448NS20K	2000	1448	W61	N/A
R1448NS20L	2000	1448	W61	N/A
R1448NS20M	2000	1448	W61	N/A
R2475ZC20M	2000	2475	W13	R500CH20
R2475ZC20N	2000	2475	W13	R500CH20
R2475ZC20R	2000	2475	W13	R500CH20
R2475ZC28M	2800	2475	W13	R500CH28
R2475ZC28N	2800	2475	W13	R500CH28
R2475ZC28R	2800	2475	W13	R500CH28
R2475ZD20M	2000	2475	W46	R500DH20
R2475ZD20N	2000	2475	W46	R500DH20
R2475ZD20R	2000	2475	W46	R500DH20
R2475ZD28M	2800	2475	W46	R500DH28
R2475ZD28N	2800	2475	W46	R500DH28
R2475ZD28R	2800	2475	W46	R500DH28
R2619ZC18J	1800	2619	W13	R600CH18
R2619ZC18K	1800	2619	W13	R600CH18
R2619ZC18L	1800	2619	W13	R600CH18
R2619ZC20J	2000	2619	W13	R600CH20
R2619ZC20K	2000	2619	W13	R600CH20
R2619ZC20L	2000	2619	W13	R600CH20
R2619ZC21J	2100	2619	W13	R600CH21
R2619ZC21K	2100	2619	W13	R600CH21
R2619ZC21L	2100	2619	W13	R600CH21
R2619ZC25J	2500	2619	W13	R600CH25
R2619ZC25K	2500	2619	W13	R600CH25
R2619ZC25L	2500	2619	W13	R600CH25
R2619ZD18J	1800	2619	W46	N/A
R2619ZD18K	1800	2619	W46	N/A
R2619ZD18L	1800	2619	W46	N/A
R2619ZD20J	2000	2619	W46	N/A
R2619ZD20K	2000	2619	W46	N/A
R2619ZD20L	2000	2619	W46	N/A

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
R2619ZD21J	2100	2619	W46	N/A
R2619ZD21K	2100	2619	W46	N/A
R2619ZD21L	2100	2619	W46	N/A
R2619ZD25J	2500	2500	W46	N/A
R2619ZD25K	2500	2500	W46	N/A
R2619ZD25L	2500	2500	W46	N/A
R2620ZC22J	2200	2620	W13	R610CH22
R2620ZC22K	2200	2620	W13	R610CH22
R2620ZC22L	2200	2620	W13	R610CH22
R2620ZC25J	2500	2620	W13	R610CH25
R2620ZC25K	2500	2620	W13	R610CH25
R2620ZC25L	2500	2620	W13	R610CH25
R2620ZD22J	2200	2620	W46	N/A
R2620ZD22K	2200	2620	W46	N/A
R2620ZD22L	2200	2620	W46	N/A
R2620ZD25J	2500	2620	W46	N/A
R2620ZD25K	2500	2620	W46	N/A
R2620ZD25L	2500	2620	W46	N/A
R2714ZC14H	1400	2714	W13	R800CH14
R2714ZC14J	1400	2714	W13	R800CH14
R2714ZC14K	1400	2714	W13	R800CH14
R2714ZC16H	1600	2714	W13	R800CH16
R2714ZC16J	1600	2714	W13	R800CH16
R2714ZC16K	1600	2714	W13	R800CH16
R2714ZC18H	1800	2714	W13	R800CH18
R2714ZC18J	1800	2714	W13	R800CH18
R2714ZC18K	1800	2714	W13	R800CH18
R2714ZD14H	1400	2714	W13	R800CH14
R2714ZD14J	1400	2714	W13	R800CH14
R2714ZD14K	1400	2714	W13	R800CH14
R2714ZD16H	1600	2714	W46	N/A
R2714ZD16J	1600	2714	W46	N/A
R2714ZD16K	1600	2714	W46	N/A
R2714ZD18H	1800	2714	W46	N/A
R2714ZD18J	1800	2714	W46	N/A
R2714ZD18K	1800	2714	W46	N/A
R3047TC24K	2400	3047	W14	R1863CH24
R3047TC24L	2400	3047	W14	R1863CH24
R3047TC24M	2400	3047	W14	R1863CH24
R3047TC24N	2400	3047	W14	R1863CH24
R3047TC24R	2400	3047	W14	R1863CH24
R3047TC24T	2400	3047	W14	R1863CH24
R3047TC28K	2800	3047	W14	R1863CH28
R3047TC28M	2800	3047	W14	R1863CH28
R3047TC28N	2800	3047	W14	R1863CH28
R3047TC28R	2800	3047	W14	R1863CH28
R3047TC28T	2800	3047	W14	R1863CH28
R3047TD24K	2400	3047	W51	R1863DH24
R3047TD24M	2400	3047	W51	R1863DH24
R3047TD24N	2400	3047	W51	R1863DH24
R3047TD24R	2400	3047	W51	R1863DH24
R3047TD24T	2400	3047	W51	R1863DH24
R3047TD28K	2800	3047	W51	R1863DH28
R3047TD28L	2800	3047	W51	R1863DH28
R3047TD28M	2800	3047	W51	R1863DH28
R3047TD28N	2800	3047	W51	R1863DH28

WESTCODE

►Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
R3047TD28R	2800	3047	W51	R1863DH28
R3047TD28T	2800	3047	W51	R1863DH28
R3370ZC10C	1000	3370	W13	R1200CH10
R3370ZC10D	1000	3370	W13	R1200CH10
R3370ZC10E	1000	3370	W13	R1200CH10
R3370ZC12C	1200	3370	W13	R1200CH12
R3370ZC12D	1200	3370	W13	R1200CH12
R3370ZC12E	1200	3370	W13	R1200CH12
R3370ZD10C	1000	3370	W46	N/A
R3370ZD10D	1000	3370	W46	N/A
R3370ZD10E	1000	3370	W46	N/A
R3370ZD12C	1200	3370	W46	N/A
R3370ZD12D	1200	3370	W46	N/A
R3370ZD12E	1200	3370	W46	N/A
R3559TC16K	1600	3559	W14	R1966CH16
R3559TC16M	1600	3559	W14	R1966CH16
R3559TC16N	1600	3559	W14	R1966CH16
R3559TC16R	1600	3559	W14	R1966CH16
R3559TC16T	1600	3559	W14	R1966CH16
R3559TC20K	2000	3559	W14	R1966CH20
R3559TC20M	2000	3559	W14	R1966CH20
R3559TC20N	2000	3559	W14	R1966CH20
R3559TC20R	2000	3559	W14	R1966CH20
R3559TC20T	2000	3559	W14	R1966CH20
R3559TD16K	1600	3559	W51	R1966DH16
R3559TD16M	1600	3559	W51	R1966DH16
R3559TD16N	1600	3559	W51	R1966DH16
R3559TD16R	1600	3559	W51	R1966DH16
R3559TD16T	1600	3559	W51	R1966DH16
R3559TD20K	2000	3559	W51	R1966DH20
R3559TD20M	2000	3559	W51	R1966DH20
R3559TD20N	2000	3559	W51	R1966DH20
R3559TD20R	2000	3559	W51	R1966DH20
R3559TD20T	2000	3559	W51	R1966DH20
R3636EC16K	1600	3636	W57	N/A
R3636EC16M	1600	3636	W57	N/A
R3636EC16N	1600	3636	W57	N/A
R3636EC16R	1600	3636	W57	N/A
R3636EC16T	1600	3636	W57	N/A
R3636EC20K	2000	3636	W57	N/A
R3636EC20M	2000	3636	W57	N/A
R3636EC20N	2000	3636	W57	N/A
R3636EC20R	2000	3636	W57	N/A
R3636EC20T	2000	3636	W57	N/A
R3708FC40V	4000	3708	W15	R1386CH40
R3708FC40W	4000	3708	W15	R1386CH40
R3708FC45V	4500	3708	W15	R1386CH45
R3708FC45W	4500	3708	W15	R1386CH45
R3708FD40V	4000	3708	W48	N/A
R3708FD40W	4000	3708	W48	N/A
R3708FD45V	4500	3708	W48	N/A
R3708FD45W	4500	3708	W48	N/A
R3968FC20K	2000	3968	W15	N/A
R3968FC20L	2000	3968	W15	N/A
R3968FC20M	2000	3968	W15	N/A
R3968FC20N	2000	3968	W15	N/A

WESTCODE

▶Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
R3968FC20R	2000	3968	W15	N/A
R3968FC20T	2000	3968	W15	N/A
R3968FC24K	2400	3968	W15	RX075FC24K
R3968FC24L	2400	3968	W15	RX075FC24L
R3968FC24M	2400	3968	W15	RX075FC24M
R3968FC24N	2400	3968	W15	RX075FC24N
R3968FC24R	2400	3968	W15	RX075FC24N
R3968FC24T	2400	3968	W15	RX075FC24N
R3968FC28K	2800	3968	W15	RX075FC28K
R3968FC28L	2800	3968	W15	RX075FC28L
R3968FC28M	2800	3968	W15	RX075FC28M
R3968FC28N	2800	3968	W15	RX075FC28N
R3968FC28R	2800	3968	W15	RX075FC28N
R3968FC28T	2800	3968	W15	RX075FC28N
R3968FD20K	2000	3968	W48	N/A
R3968FD20L	2000	3968	W48	N/A
R3968FD20M	2000	3968	W48	N/A
R3968FD20N	2000	3968	W48	N/A
R3968FD20R	2000	3968	W48	N/A
R3968FD20T	2000	3968	W48	N/A
R3968FD24K	2400	3968	W48	RX075FD24K
R3968FD24L	2400	3968	W48	RX075FD24L
R3968FD24M	2400	3968	W48	RX075FD24M
R3968FD24N	2400	3968	W48	RX075FD24N
R3968FD24R	2400	3968	W48	RX075FD24N
R3968FD24T	2400	3968	W48	RX075FD24N
R3968FD28K	2800	3968	W48	RX075FD28K
R3968FD28L	2800	3968	W48	RX075FD28L
R3968FD28M	2800	3968	W48	RX075FD28M
R3968FD28N	2800	3968	W48	RX075FD28N
R3968FD28R	2800	3968	W48	RX075FD28N
R3968FD28T	2800	3968	W48	RX075FD28N
S0500KC200	2000	2000	W34	N/A
S0500KC20Y	2000	100	W34	N/A
S0500KC25D	2500	2000	W34	N/A
S0500KC25Y	2500	100	W34	N/A
S0700KC140	1400	1400	W34	N/A
S0700KC14Y	1400	100	W34	N/A
S0700KC17D	1700	1360	W34	N/A
S0700KC17Y	1700	100	W34	N/A
S1000NC300	3000	3000	W36	N/A
S1000NC30Y	3000	100	W36	N/A
S1000NC36D	3600	2880	W36	N/A
S1000NC36Y	3600	100	W36	N/A
S1200NC200	2000	2000	W36	N/A
S1200NC20Y	2000	100	W36	N/A
S1200NC25D	2500	2000	W36	N/A
S1200NC25Y	2500	100	W36	N/A
H0500KC200	2000	2000	W34	N/A
H0500KC20Y	2000	100	W34	N/A
H0500KC25D	2500	2000	W34	N/A
H0500KC25Y	2500	100	W34	N/A
H0700KC140	1400	1360	W34	N/A
H0700KC14Y	1400	100	W34	N/A
H0700KC17D	1700	1360	W34	N/A

WESTCODE

▶Parameters

New Part No.	Voltage (V)	Current (A)	Fig.No.	Old Part No.
H0700KC17Y	1700	100	W34	N/A
H1200NC200	2000	2000	W36	N/A
H1200NC20Y	2000	100	W36	N/A
H1200NC25D	2500	2000	W36	N/A
H1200NC25Y	2500	100	W36	N/A
G1000NC450	4500	18	W30	N/A
G1000QC400	4000	18	W35	GX152QC400
G1000QC450	4500	18	W35	GX152QC450
GX185QC250	2500	18	W35	N/A
G2000VC250	2500	18	W31	WG20025SN
G2000VC450	4500	18	W31	WG20045SN
G3000TC250	2500	18	W32	WG30025SN
G3000TC450	4500	18	W32	WG30045SN
G3000TC600	6000	18	W32	WG30060SN
G4000EC450	4500	18	W33	WG40045SN
Y200CKC250	2500	2000	W34	Y2002KC250
Y500CKC250	2500	2000	W36	Y5002NC250

SIEMENS

►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
BStT65 80	1200	34	Φ120.35	SSiN 42C 40	700	750	Φ41.14
BStT65 90	1350	340	Φ120.35	SSiN 42C 60	1100	750	Φ41.14
BStT65 110	1650	340	Φ120.35	SSiN 42C 83	1500	750	Φ41.14
				SSiN 42C 100	1800	750	Φ41.14
BStT66 133	2000	2800	Φ120.35	SSiN 42C 120	2200	750	Φ41.14
BStT66 146	2200	2800	Φ120.35				
BStT66 166	2500	2800	Φ120.35	SSiP 60 83	1500	1500	Φ58.26
				SSiP 60 100	1800	1500	Φ58.26
BStT68H253	3800	1900	Φ120.35	SSiP 60 120	2200	1500	Φ58.26
BStT68H266	4000	1900	Φ120.35				
BStT68H280	4200	1900	Φ120.35	SSiP 62 150	2800	750	Φ58.26
				SSiP 62 175	3200	750	Φ58.26
BStT68L186	2800	2200	Φ120.35	SSiP 62 200	3600	750	Φ58.26
BStT68L213	3200	2200	Φ120.35	SSiP 62 220	4000	750	Φ58.26
BStT68S346	5200	1500	Φ120.35	SSiR 60 83	1500	2500	Φ75.26
				SSiR 60 100	1800	2500	Φ75.26
BStU68H253	3800	3000	Φ150.35	SSiR 60120	2200	2500	Φ75.26
BStU68H266	4000	3000	Φ150.35				
BStU68H280	4200	3000	Φ150.35	SSiR 62 135	2500	2000	Φ75.26
				SSiR 62 175	3200	2000	Φ75.26
BStU68S346	5200	2600	Φ150.35	SSiR 62 200	3600	2000	Φ75.26
				SSiR 62 220	4000	2000	Φ75.26
SSiK 28 25	400	300					
SSiK 28 40	700	300	single-sided	SSiT60 90	1650	4200	Φ120.35
SSiK 28 60	1100	300	Φ37.14	SSiT60 90	1800	4200	Φ120.35
SSiK 28 83	1500	300		SSiT60 90	2200	4200	Φ120.35
SSiL 28 25	400	500		SSiT62 175	3200	3000	Φ120.35
SSiL 28 40	700	500	single-sided	SSiT60 200	3600	3000	Φ120.35
SSiL 28 60	1100	500	Φ37.14	SSiT60 220	4000	3000	Φ120.35
SSiL 28 83	1500	500					

SIEMENS

SCR and Diodes



►Application

- Inverters for AC motors
- Power supply units for DCmotors
- DC power supply uints for battery chargers
- General purpose DC power supply uints.



►Features

- Hermetic metal case with ceramic insulator
- Capsule package for double sided cooling
- Shallow design with single sided cooling
- International standard case
- Off-state and reverse voltages up to 1800V

►Parameters

Model	Voltage (V)	Current (A)	OUTLine	Model	Voltage (V)	Current (A)	OUTLine
BStH61 13y	200	160	double-sided Φ37.14	BStP65 110	1650	800	Φ58.26
BStH61 20y	300	160					
BStH61 26y	400	160		BStQ68H253	3800	400	Φ58.26
BStH61 33y	500	160		BStQ68H280	4200	400	Φ58.26
BSt45 60	900	185	single-sided Φ41.14	BStR63N166	2500	1080	Φ75.26
BSt45 80	1200	185		BStR63N186	2800	1080	Φ75.26
BSt45 90	1350	185		BStR63N200	3000	1080	Φ75.26
BSt45 110	1650	185					
				BStR65 60	900	1400	Φ75.26
BStL45 60	900	240	single-sided Φ41.14	BStR65 80	1200	1400	Φ75.26
BStL45 80	1200	240		BStR65 90	1350	1400	Φ75.26
BStL45 90	1350	240		BStR65 110	1650	1400	Φ75.26
BStL45 110	1650	240		BStR65 120	1800	1400	Φ75.26
BStL61 13y	200	320	double-sided Φ37.14	BstR66 146	2200	800	Φ75.26
BStL61 20y	300	320		BStR65 166	2500	800	Φ75.26
BStL61 26y	400	320		BStR66 146	2200	1200	Φ75.26
BStL61 33y	500	320		BStR66 166	2500	1200	Φ75.26
BStM45 60	900	350	single-sided Φ41.14	BStR68H253	3800	860	Φ75.26
BStM45 80	1200	350		BStR68H266	4000	860	Φ75.26
BStM45 90	1350	350		BStR68H280	4200	860	Φ75.26
BStM45 110	1650	350					
				BStR68L186	2800	1000	Φ75.26
BStP65 60	900	800	Φ58.26	BStR68L213	3200	1000	Φ75.26
BStP65 80	1200	800	Φ58.26	BStR68L233	3500	1000	Φ75.26
BStP65 90	1350	800	Φ58.26				