Photocoupler

PC-17K1 • PC-17K2 • PC-17K4

These Photocouplers consist of a Gallium Arsenide Infrared Emitting Diode and a Silicon NPN Phototransistor per a channel

The PC-17K1 has one channel in a 4-pin DIP package
The PC-17K2 has two channels in a 8-pin DIP package
The PC-17K4 has four channels in a 16-pin DIP package

FEATURES

- Small Package Size
- Collector-Emitter Voltage : Min.35V
- Current Transfer Ratio : Min.50% (at I_F=5mA, V_{CE}=5V)
- Electrical Isolation Voltage : AC5000Vrms
- Creepage/Clearance between Input and Output : Min. 7.0mm
- UL Recognized File No. E107486


APPLICATIONS

- Interface between two circuits of different potential
- Vending Machine, Cordless Phone, Key Phone, Fax, Motor Control
- Programmable Logic Control
- Power Supply
- Computer Terminals


DIMENSION

(Unit : mm)


PC-17K1

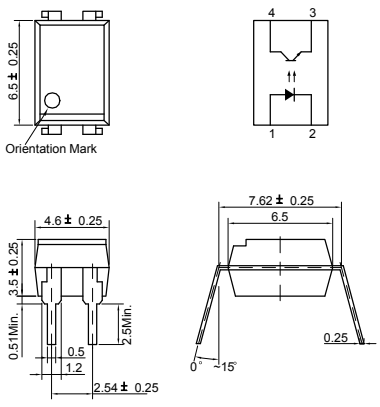

PC-17K2

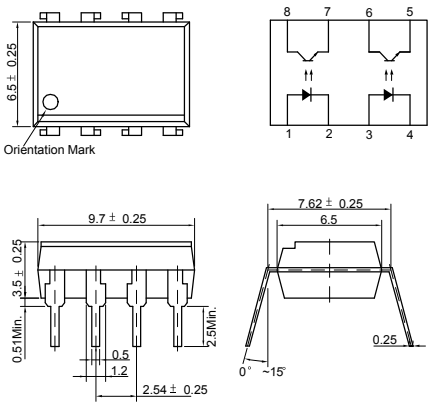

PC-17K4

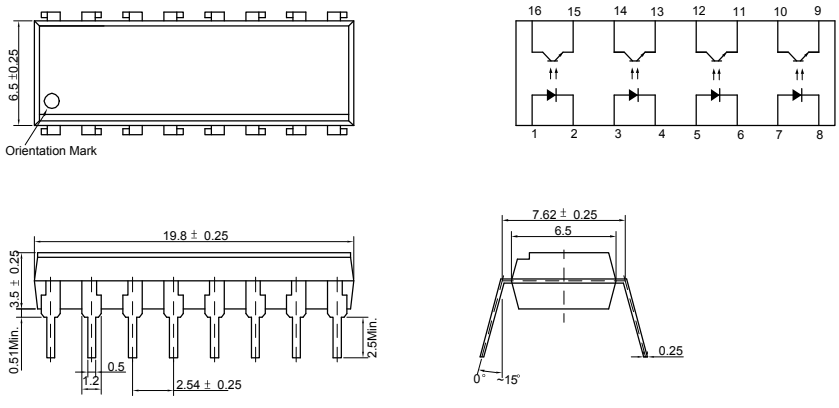

PC-17K1 • PC-17K2 • PC-17K4

MAXIMUM RATINGS

(Ta=25℃)

Parameter		Symbol	Rating	Unit
Input	Forward Current	I_F	50	mA
	Reverse Voltage	V_R	5	V
	Peak Forward Current *1	I_{FP}	1	A
	Power Dissipation	P_D	70	mW
Output	Collector-Emitter Breakdown Voltage	BV_{CEO}	35 *4	V
	Emitter-Collector Breakdown Voltage	BV_{ECO}	6	V
	Collector Current	I_C	50	mA
	Collector Power Dissipation	P_C	150	mW
Input to Output Isolation Voltage *2		V_{iso}	AC5000	V_{rms}
Storage Temperature		T_{stg}	-55~+125	℃
Operating Temperature		T_{opr}	-30~+100	℃
Lead Soldering Temperature *3		T_{sol}	260	℃
Total Power Dissipation		P_{tot}	200	mW

*1. Input current with 100㎲ pulse width, 1% duty cycle

*2. Measured at RH=40~60% for 1min

*3. 1/16 inch form case for 10sec

*4. Customer Option

ELECTRO-OPTICAL CHARACTERISTICS


(Ta=25℃, unless otherwise noted)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit.
Input	Forward Voltage	V_F	I_F=10mA	-	1.15	1.30	V
	Reverse Current	I_R	V_R=5V	-	-	10	㎂
	Capacitance	C_T	V=0, f=1MHz	-	30	-	pF
Output	Collector-Emitter Breakdown Voltage	BV_{CEO}	I_C=0.5mA	35	-	-	V
	Emitter-Collector Breakdown Voltage	BV_{ECO}	I_E=0.1mA	6	-	-	V
	Collector Dark Current	I_{CEO}	I_F=0, V_{CE}=24V	-	-	100	nA
	Capacitance	C_{CE}	V_{CE}=0, f=1MHz	-	10	-	pF
Coupled	Current Transfer Ratio *5	CTR	I_F=5mA, V_{CE}=5V	50	-	600	%
	Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	I_F=5mA, I_C=1mA	-	0.15	0.4	V
	Input-Output Capacitance	C_{IO}	V=0, f=1MHz	-	1	-	pF
	Input-Output Isolation Resistance	R_{IO}	RH=40~60%, V=500V	-	10^{11}	-	Ω
	Rise Time	tr	V_{CE}=5V, R_L=100Ω	-	4	-	㎲
	Fall Time	tf	I_C=2mA	-	4	-	㎲


*5. CTR=(I_C/I_F) X 100 (%)

PC-17K1 • PC-17K2 • PC-17K4


Forward Current vs. Ambient Temperature

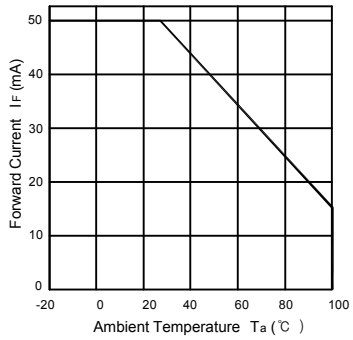


Collector Power Dissipation vs. Ambient Temperature

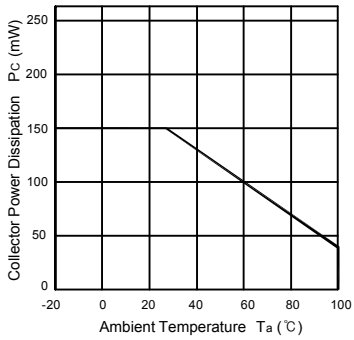


Forward Current vs. Forward Voltage




Collector Current vs. Collector-Emitter Voltage




Dark Current vs. Ambient Temperature

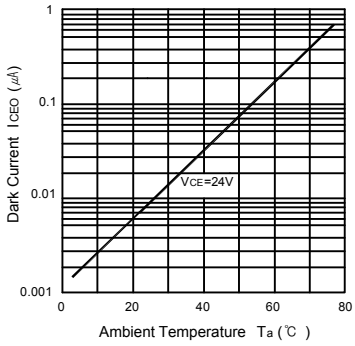


Collector Current vs. Ambient Temperature

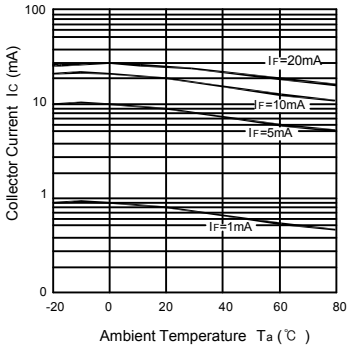


Response Time vs. Load Resistance

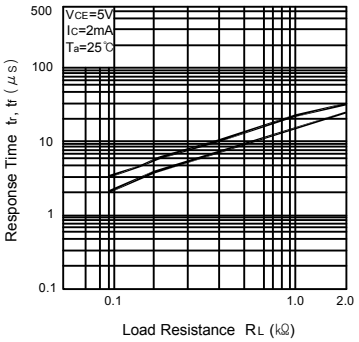

Collector Current vs. Forward Current

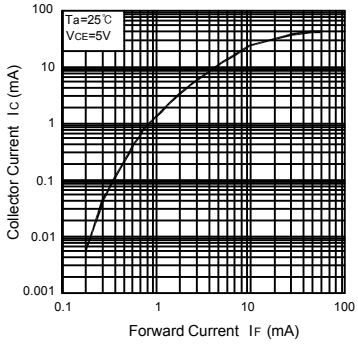

Switching Time Test Circuit

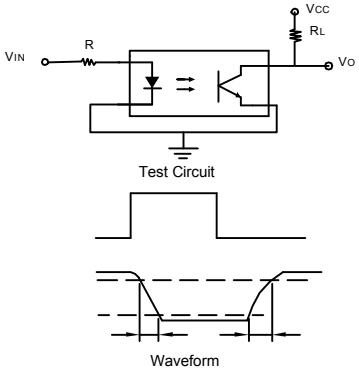

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.