
FAST RECOVERY DIODE 3.3A/600V/trr:35nsec NSF03A60

FEATURES

- Surface Mounting Device
- Ultra-Fast Recovery
- Low Forward Voltage Drop
- Low Power Loss, High Efficiency
- High Surge Capability
- Packaged in 16mm Tape and Reel
- Not Rolling During Assembly
- 200 Volts through 600 Volts Types Available

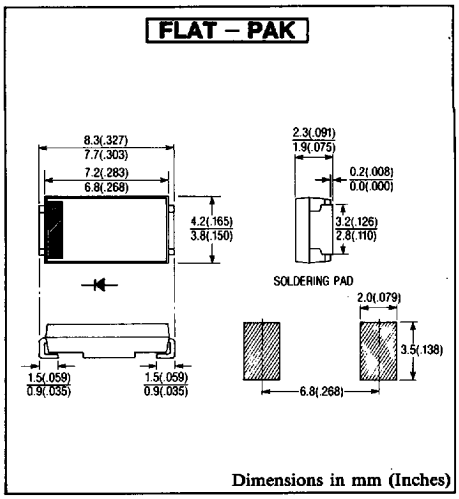

Approx. Net Weight: 0.16 Grams

MAXIMUM RATINGS

Voltage Rating	Type / Symbol	NSF03A60		Unit
Repetitive Peak Reverse Voltage	V_{RRM}	600		V
Electrical Rating	**Symbol**	**Condition**	**Rating**	**Unit**
Average Rectified Output Current	I_O	180° rectangular wave conduction *T_ℓ = 65°C	3.3	A
		180° sinusoidal wave conduction *T_ℓ = 79°C	3.0	
Peak One-cycle Forward Surge Current	I_{FSM}	50Hz half sine wave 1 cycle, non-repetitive	45	A
Operating Junction Temperature Range	T_{jw}		−40 to 150	°C
Storage Temperature Range	T_{stg}		−40 to 150	°C

ELECTRICAL & THERMAL CHARACTERISTICS

Characteristics	Symbol	Test Condition	Max.	Unit
Peak Forward Voltage	V_{FM}	I_{FM} = 3A, T_j = 25°C	1.7	V
Peak Reverse Current	I_{RM}	V_{RM} = V_{RRM}, T_j = 25°C	20	μA
Peak Reverse Current	t_{rr}	I_F = 3A, −di/dt = 50A/μs, T_a = 25°C	35	ns
Thermal Resistance	$R_{th(j-\ell)}$	Junction to lead	13	°C/W

T_ℓ: Lead Temperature

This Material Copyrighted By Its Respective Manufacturer

FIG.1-FORWARD CURRENT VS. VOLTAGE

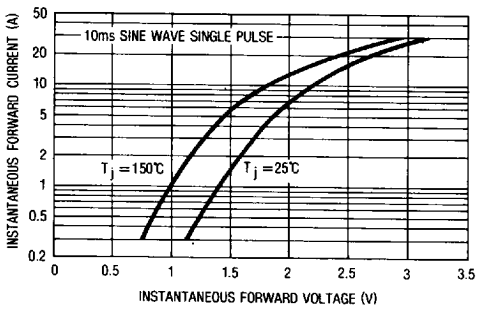


FIG.2-AVERAGE FORWARD POWER DISSIPATION

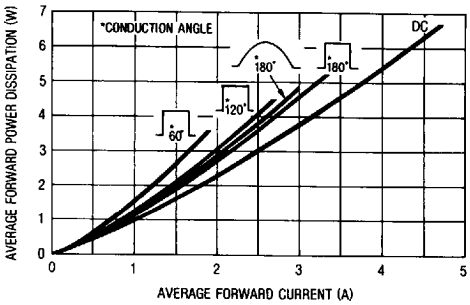


FIG.3-AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE

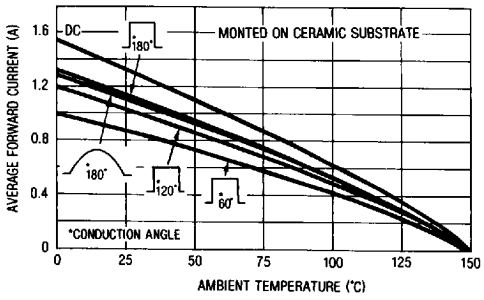


FIG.4-AVERAGE FORWARD CURRENT VS. LEAD TEMPERATURE


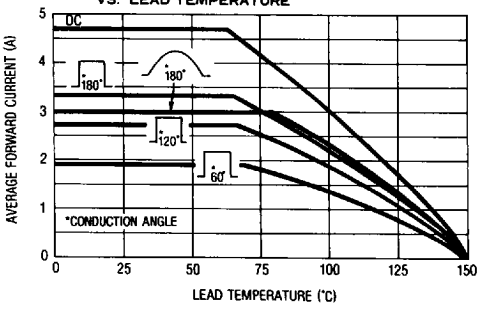


FIG.5-SURGE CURRENT RATINGS

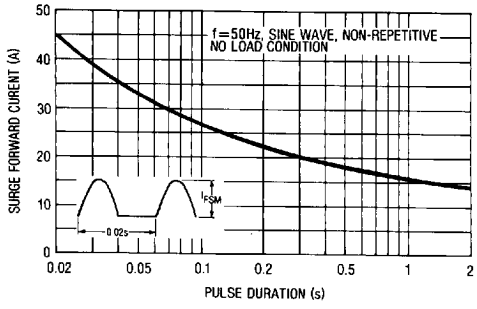

This Material Copyrighted By Its Respective Manufacturer