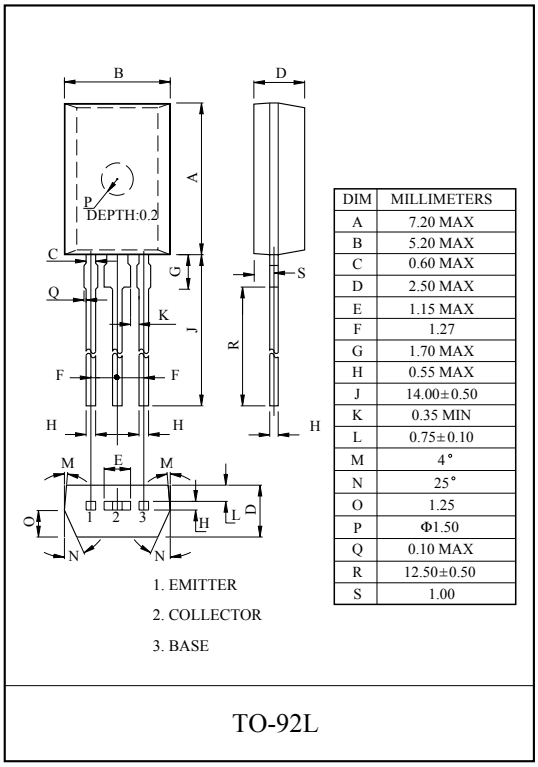
COLOR TV VERT. DEFELECTION OUTPUT APPLICATION.
COLOR TV CLASS B SOUND OUTPUT APPLICATION.

FEATURES

· High Voltage : $V_{CEO}$=-160V.
· Large Continuous Collector Current Capability.
· Complementary to KTC3228.




| DIM | MILLIMETERS |
|---|---|
| A | 7.20 MAX |
| B | 5.20 MAX |
| C | 0.60 MAX |
| D | 2.50 MAX |
| E | 1.15 MAX |
| F | 1.27 |
| G | 1.70 MAX |
| H | 0.55 MAX |
| J | 14.00±0.50 |
| K | 0.35 MIN |
| L | 0.75±0.10 |
| M | 4° |
| N | 25° |
| O | 1.25 |
| P | Φ1.50 |
| Q | 0.10 MAX |
| R | 12.50±0.50 |
| S | 1.00 |

TO-92L

MAXIMUM RATING (Ta=25℃)

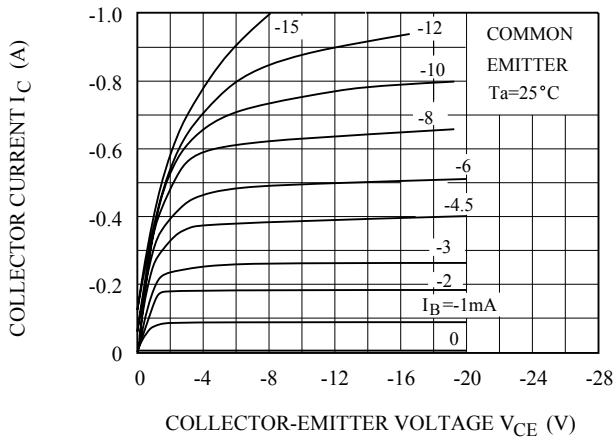
| CHARACTERISTIC | SYMBOL | RATING | UNIT |
|---|---|---|---|
| Collector-Base Voltage | $V_{CBO}$ | -160 | V |
| Collector-Emitter Voltage | $V_{CEO}$ | -160 | V |
| Emitter-Base Voltage | $V_{EBO}$ | -6 | V |
| Collector Current | $I_C$ | -1 | A |
| Base Current | $I_B$ | -0.5 | A |
| Collector Power Dissipation | $P_C$ | 1 | W |
| Junction Temperature | $T_j$ | 150 | ℃ |
| Storage Temperature Range | $T_{stg}$ | -55～150 | ℃ |

ELECTRICAL CHARACTERISTICS (Ta=25℃)

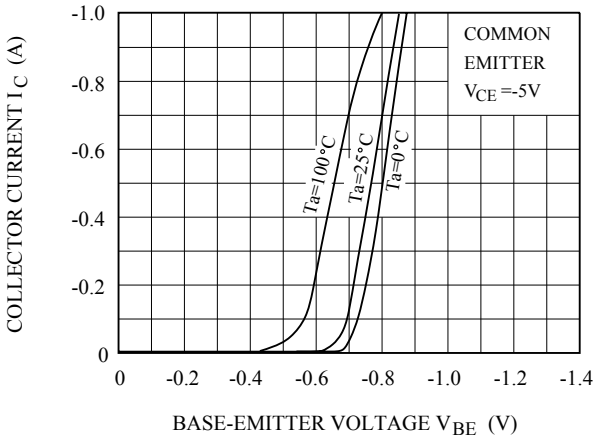
| CHARACTERISTIC | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---|---|---|---|---|---|---|
| Collector Cut-off Current | $I_{CBO}$ | $V_{CB}$=-150V, $I_E$=0 | - | - | -1.0 | μA |
| Emitter Cut-off Current | $I_{EBO}$ | $V_{EB}$=-6V, $I_C$=0 | - | - | -1.0 | μA |
| Collector-Emitter Breakdown Voltage | $V_{(BR)CEO}$ | $I_C$=-10mA, $I_B$=0 | -160 | - | - | V |
| DC Current Gain | $h_{FE}$ (Note) | $V_{CE}$=-5V, $I_C$=-200mA | 60 | - | 320 | |
| Collector-Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C$=-500mA, $I_B$=-50mA | - | - | -1.5 | V |
| Base-Emitter Voltage | $V_{BE}$ | $V_{CE}$=-5V, $I_C$=-5mA | -0.45 | - | -0.75 | V |
| Transition Frequency | $f_T$ | $V_{CE}$=-5V, $I_C$=-200mA | 15 | 50 | - | MHz |
| Collector Output Capacitance | $C_{ob}$ | $V_{CB}$=-10V, $I_E$=0, f=1MHz | - | - | 35 | pF |

Note : $h_{FE}$ Classification R:60～120 O:100～200, Y:160～320

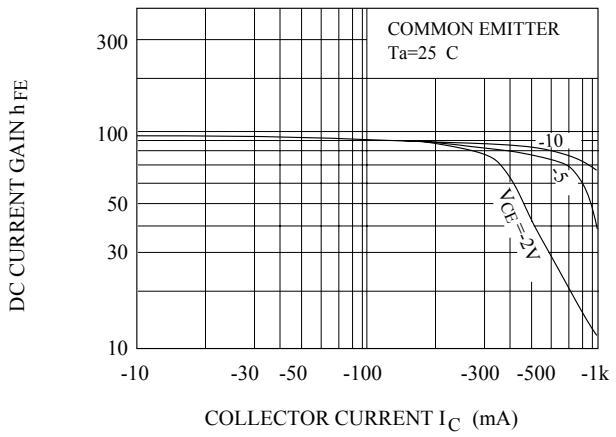
$I_C$ - $V_{CE}$



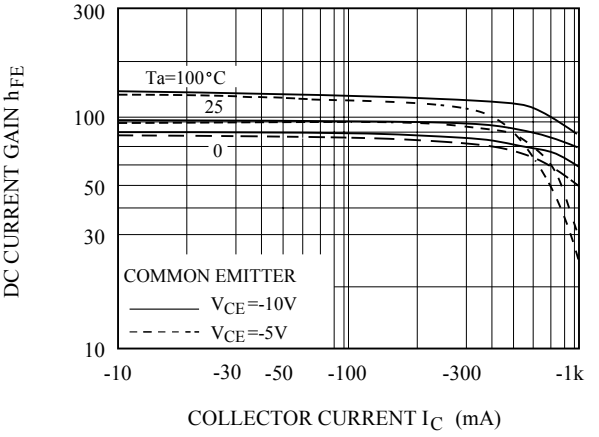

$I_C$ - $V_{BE}$



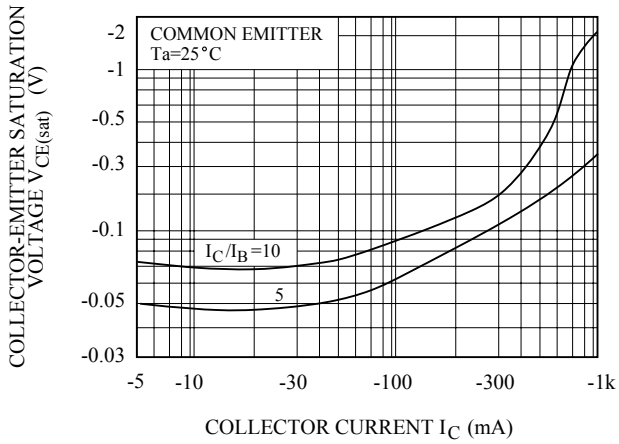

$h_{FE}$ - $I_C$



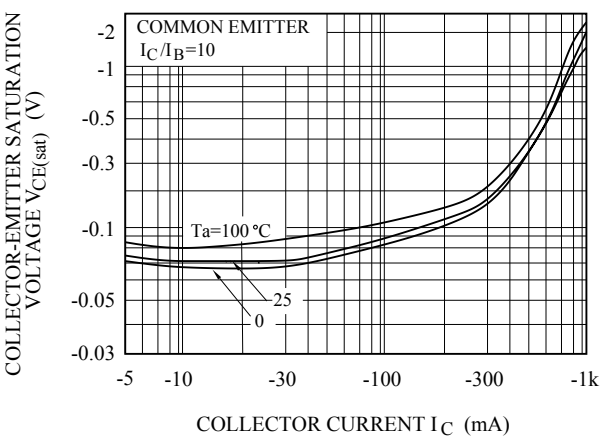

$h_{FE}$ - $I_C$



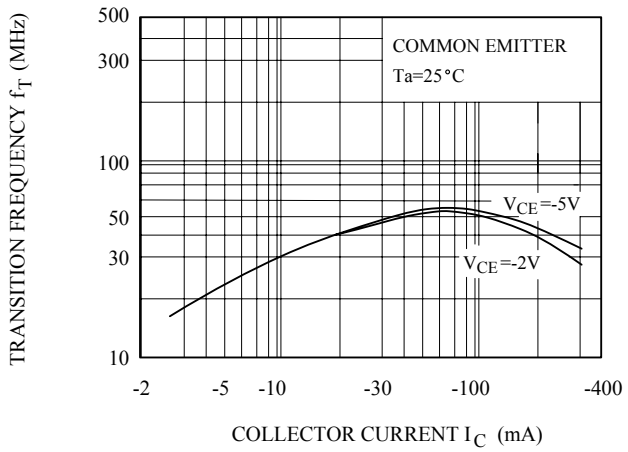

$V_{CE(sat)}$ - $I_C$



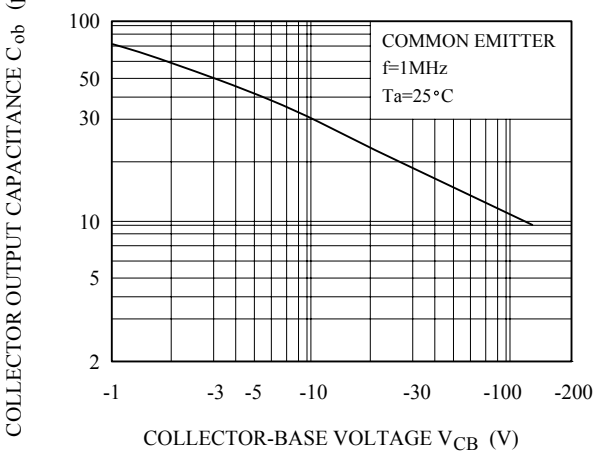

$V_{CE(sat)}$ - $I_C$



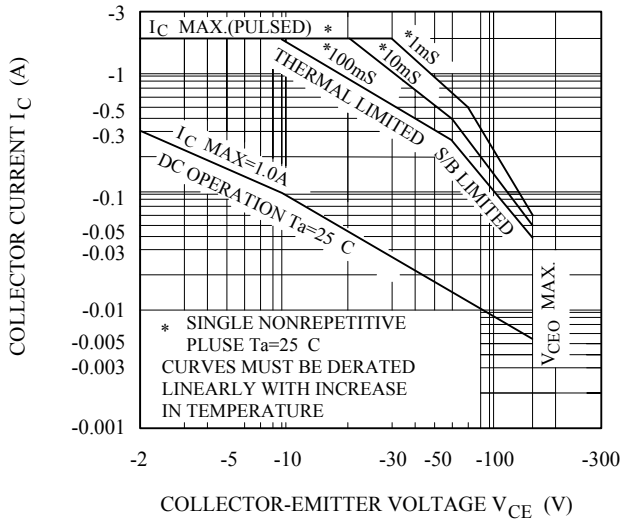
$f_T$ - $I_C$




$C_{ob}$ - $V_{CB}$




SAFE OPERATING AREA



This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.