
HIGH VOLTAGE SWITCHING APPLICATION.

FEATURES

- High Voltage : V_{CEO}=150V.
- High Transition Frequency : f_T=120MHz(Typ.).
- 1W (Monunted on Ceramic Substrate).
- Small Flat Package.
- Complementary to KTA1660.

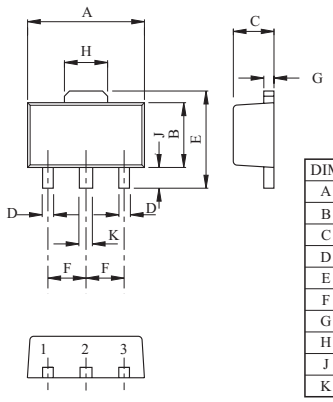

DIM	MILLIMETERS
A	4.70 MAX
B	2.50±0.20
C	1.70 MAX
D	0.45+0.15/-0.10
E	4.25 MAX
F	1.50±0.10
G	0.40 TYP
H	1.75 MAX
J	0.75 MIN
K	0.5+0.10/-0.05

1. BASE
2. COLLECTOR (HEAT SINK)
3. EMITTER


SOT-89

MAXIMUM RATING (Ta=25℃)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	200	V
Collector-Emitter Voltage	V_{CEO}	150	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	50	mA
Base Current	I_B	10	mA
Collector Power Dissipation	P_C	500	mW
	P_C*	1	W
Junction Temperature	T_j	150	℃
Storage Temperature Range	T_{stg}	-55～150	℃

P_C* : KTC4372 mounted on ceramic substrate (250mm²x0.8t)

Marking

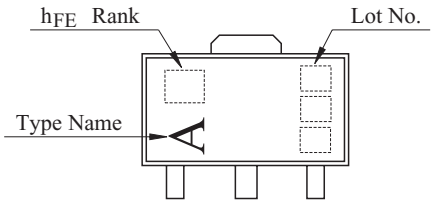


ELECTRICAL CHARACTERISTICS (Ta=25℃)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	V_{CB}=200V, I_E=0	-	-	0.1	μA
Emitter Cut-off Current	I_{EBO}	V_{EB}=5V, I_C=0	-	-	0.1	μA
DC Current Gain	h_{FE} (Note)	V_{CE}=5V, I_C=10mA	70	-	240	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	I_C=10mA, I_B=1mA	-	-	0.5	V
Base-Emitter Voltage	V_{BE}	V_{CE}=5V, I_C=30mA	-	-	1.0	V
Transition Frequency	f_T	V_{CE}=30V, I_C=10mA	-	120	-	MHz
Collector Output Capacitance	C_{ob}	V_{CB}=10V, I_E=0, f=1MHz	-	3.5	5.0	pF


Note : h_{FE} Classification O:70～140, Y:120～240

This datasheet has been downloaded from http://www.digchip.com at this page


I_C - V_{CE}

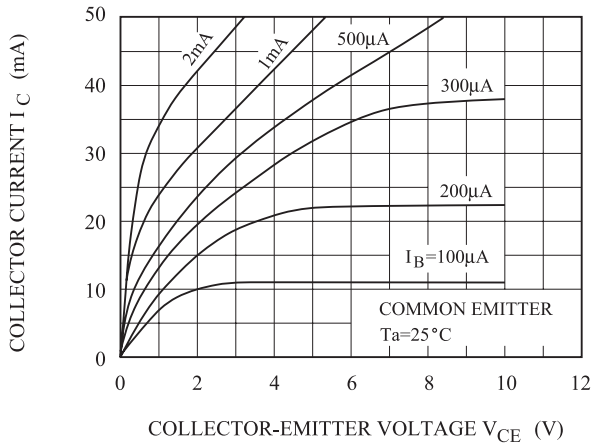


h_{FE} - I_C

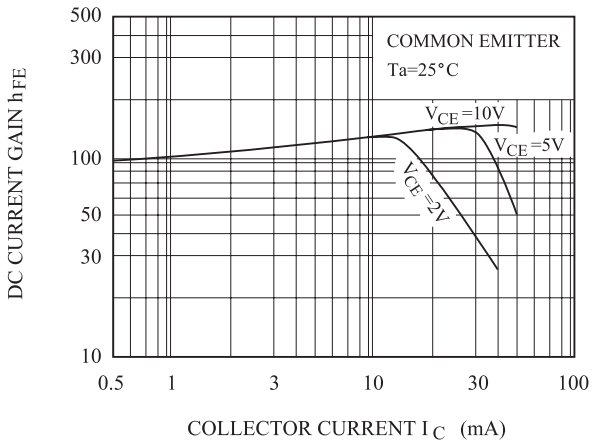


h_{FE} - I_C

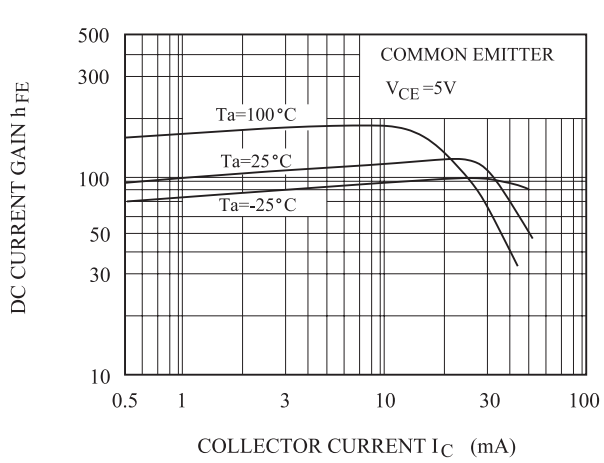


$V_{CE(sat)}$ - I_C

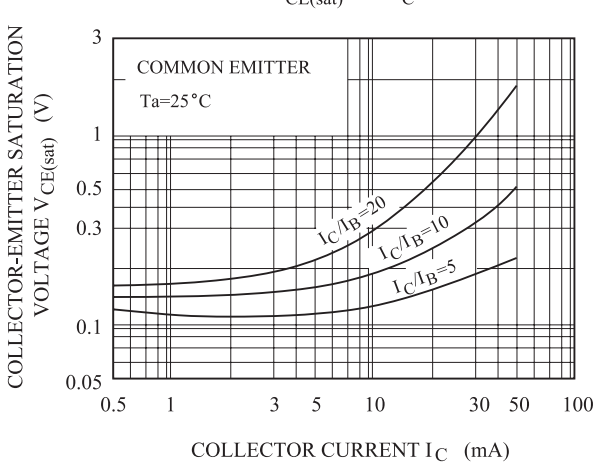


$V_{CE(sat)}$ - I_C

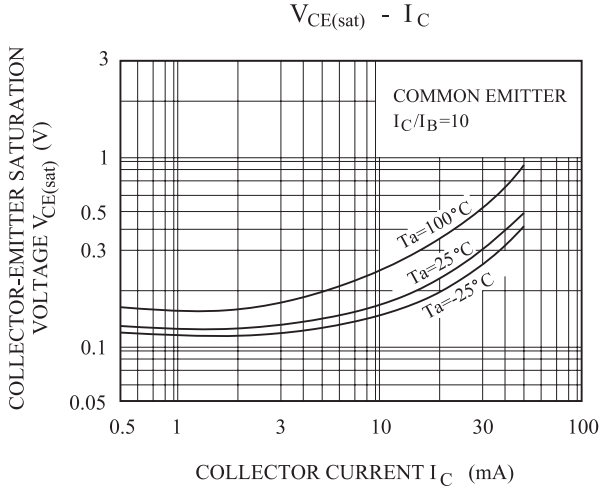


I_C - V_{BE}

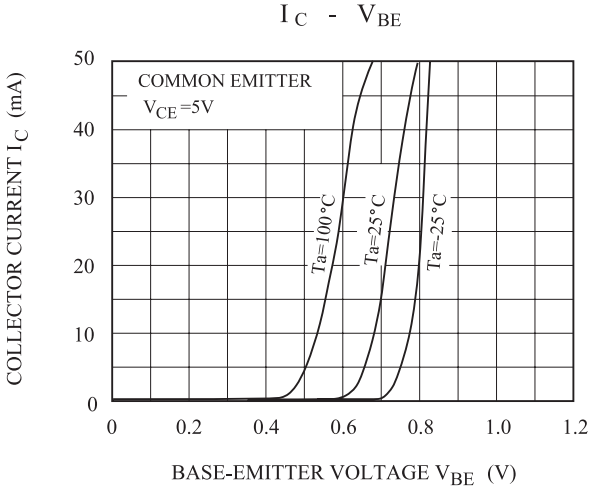

f_T - I_E

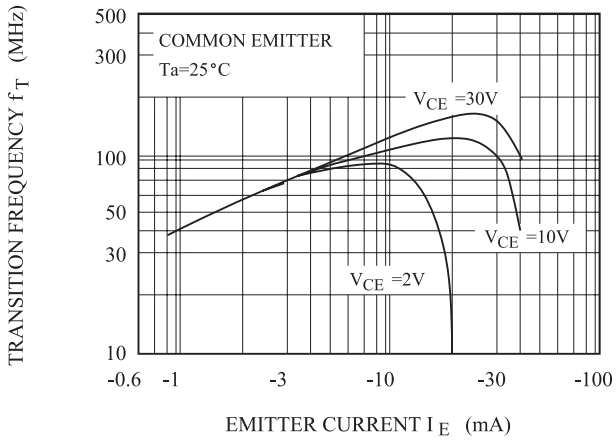

SAFE OPERATING AREA

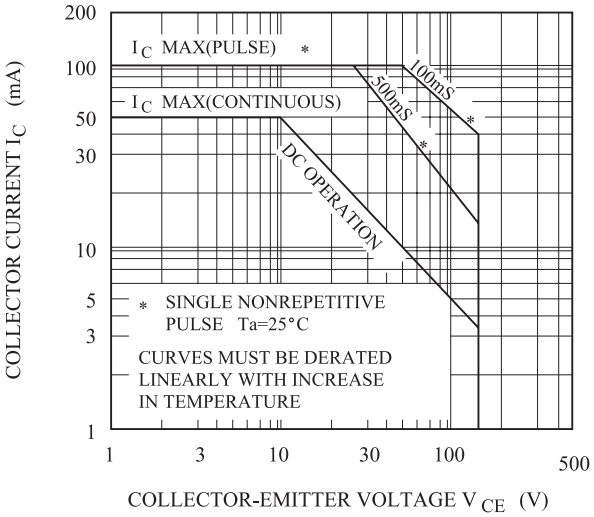

P_C - Ta

