

Plastic bodied limit switch
Series TI2

Description **TI2-A1Z KS**	Article number **6116469043**


Operating symbol




Fixed positioning with e.g. fixing screw M5 according to the standard DIN EN ISO 4762.



Operating diagram

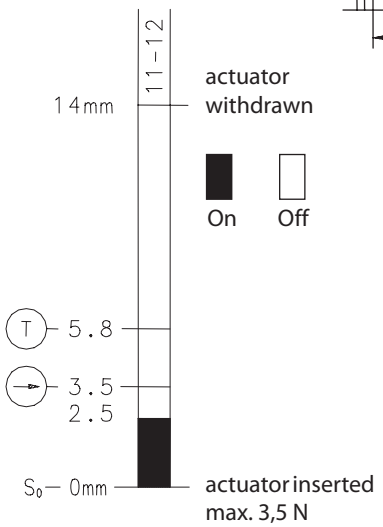

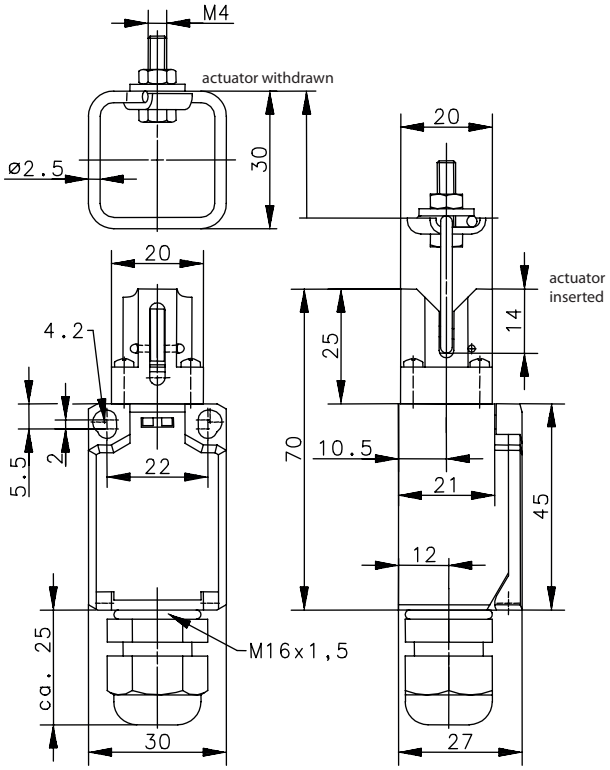

Electrical Data		
Rated insulation voltage	U_i	250 V AC
Conv. thermal current	I_{the}	10 A AC / 2,5 A DC
Rated operational voltage	U_e	240 V AC; 250 V DC
Standards		acc. to EN 60947-1; EN 60947-5-1; DIN EN 81
Utilization category		AC-15, U_e/I_e 240 V / 3 A; DC-13, U_e/I_e 250 V / 0,27 A
Direct opening action	⊖	acc. to IEC/EN 60947-5-1, Annex K
Gap between NC-contacts	Ⓣ	DIN EN 81
Short-circuit protective device		Fuse 6 A gG
Protection class		II, totally insulated

Electrical Data (elevator)	
Rated value	U_e/I_e 230 V / 2 A AC U_e/I_e 200 V / 0,5 A DC

Mechanical data	
Enclosure	Thermoplastic, glass fibre reinforced (UL 94-V0)
Cover	Thermoplastic, glass fibre reinforced (UL 94-V0)
Actuator	Separate actuator (steel 1.4310) Rd EN10278-2,5 h11
Ambient air temperature	-30 °C ... +80 °C
Contact type	1 N.C. (Y) with positive opening operation
Mechanical life	1 x 10^6 operating cycles (only applies to linear actuation see page 1)
Switching frequency	≤ 30 / min.
Assembly	2 x M4
Connection	2 screw connections (M3,5)
Conductor cross-sections	0,5 – 1,5 mm^2 (solid or stranded wire with ferrules)
Cable entrance	1 x cable gland M16 x 1,5 (Clamp-range 2 - 7 mm)
Weight	≈ 0,05 kg
Installation position	operator definable
Protection type	IP65 acc. to EN 60529; DIN VDE 0470 T1

Standards	
	DIN EN 60947-5-1
	DIN EN 81-20/50:2014

EU Conformity	
	acc. to directive 2014/35/EU (Low-Voltage-Directive)
	2012/19/EU (EU-WEEE II); WEEE-Reg. No. DE 50560927

UK Conformity	
	acc. to Electrical Equipment (Safety) Regulations 2016, 2016 No. 1101

Approvals	
	TÜV SÜD
	$_{C}CSA_{US}$
	CCC

Notes
The specified protection classification (IP code) applies only when the cover is closed and the appropriate cable is used, in accordance with the clamping range of the above mentioned cable gland.