
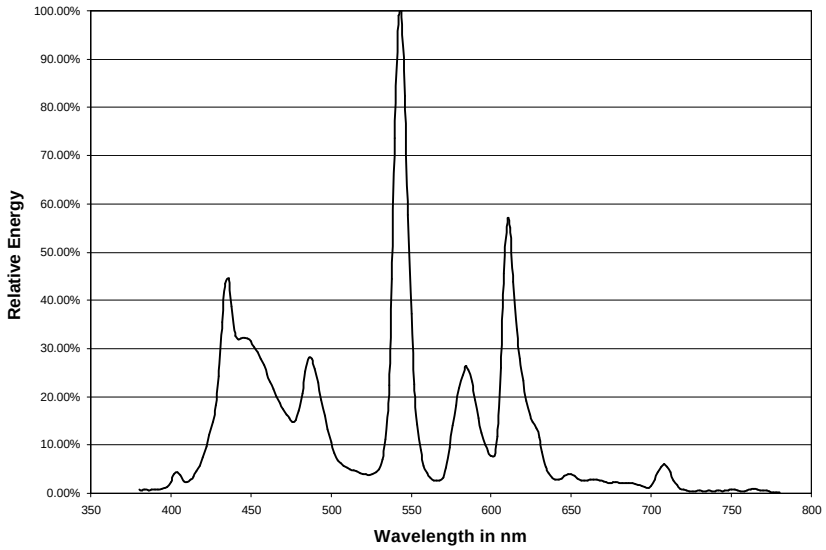


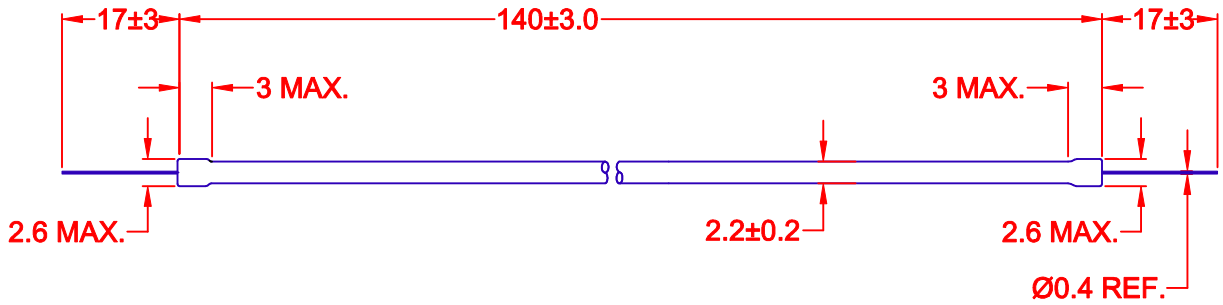

JKL LAMP PART NUMBER	COLOR	STARTING CIRCUIT VOLTAGE VS (Vrms)	OPERATING LAMP VOLTAGE VL (Vrms)	OPERATING LAMP CURRENT IL (mArms)	BRIGHTNESS (CANDELA/m2)	*RATED LIFE (HRS)
BF22140-24B	LCD HIGH OUTPUT WHITE 8400°k RGB	730 @ 0°C	340	5	38,000 ± 10%	20,000

* RATED LIFE IS DEFINED AS THE POINT AT WHICH THE INTENSITY BECOMES 50% OFTHE INITIAL RATING.

REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE
A	DIM LINE CORRECT. AND 140 +/- 5.0 TO 140 +/- 3.0	10/17/00
	RELEASED	6/7/00

METRIC
THIRD ANGLE PROJECTION

DIMENSIONS ARE IN MILLIMETERS
TOLERANCE UNLESS OTHERWISE SPECIFIED
1 PL +/- 0.2
2 PL +/- 0
ANGLE +/- 0

JKL COMPONENTS CORPORATION

TITLE: MINIATURE COLD CATHODE FLUORESCENT LAMP

DRAWN BY	APPV'D BY	DATE	SIZE	FSCM NO.	DRAWING NO.
L. WENGSTROM	FD	10/17/00	A	55335	BF22140-24B

- CAD DRAWING -
MANUAL REVISIONS NOT PERMITTED

SCALE	RELEASED DATE	REVISION DATE	REV. NO.	SHEET
NONE	6/7/00	10/17/00	A	1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

JKL Components:

BF22140-24B