DATA SHEET

GH025A(M)

CCFL Backlight Inverter

Product No. HD-10-034R1.1



Rev 1.0

April 15, 2005

The information given in this document is carefully checked and believed to be reliable. However, Distec takes no response for any failure or product damage caused by the application of this information. Please check all connections carefully with the data sheet. Distec products are not intended for use in systems in which failures of product could result in personal injury. All mentioned trademarks are registered trademarks of their owner.

All specifications are subject to change without notification.

flatpanel displays and solutions

DISTEC GmbH
Industriestr. 1
D - 82110 Germering
Germany

Phone: +49 - (0)89/ 89 43 63 - 0
Fax: +49 - (0)89/ 89 43 63 - 131
E-Mail: info@distec.de
Internet: www.distec.de

We support you worldwide with offices in Germany, Turkey, Great Britain and the USA. For further information contact your local distributor (see last page of this data sheet).

1. APPLICATION

This Document Specified The Detailed Product Requirements of Inverter GH025A

2. SUITABLE LOAD

LCD MODULE : 7" ~15" 1 LAMP TFT LCD

3. ELECTRICAL CHARACTERISTICS

3-1. Absolute Maximum Ratings

ITEM	SYMBOL	SPEC	UNIT	REMARKS
INPUT VOLTAGE1	Vin1	10.8~13.2	V	
INPUT VOLTAGE2	Vin2	4.9~5.1	V	
OPERATING TEMPERATURE	Top	0~50	℃	
STORAGE TEMPERATURE	Tstg	-30~80	℃	
RELATIVE HUMIDITY	RH	80	%	


3-2. Control Signal

PIN NO.	SYMBOL	STATUS	ACTION	REMARKS
CN1 #3	BKLT_ON	HIGH	LAMP(CCFL)-ON	2.4~5.25V
		LOW	LAMP(CCFL)-OFF	0.8V MAX

3-3. Output Characteristics

ITEM	SYMBOL	CONDITION			SPECIFICATION			UNIT
		Vin1(V) (DC-IN)	BRT-ADJ	RL(kΩ)	MIN	TYP	MAX	
OUTPUT CURRENT	Io(max)	12	0V	80±0.5	5.4	6.1	**6.5**	mArms
	Io(min)	12	3.5V	80±0.5	2.3	3.0	3.7	
INPUT CURRENT	Iin	12	0V	80±0.5	0.3	0.5	0.7	ADC
FREQUENCY	F	12	0V	80±0.5	44	51	58	KHz
OPEN OUTPUT VOLTAGE	Vo	12	0V	∞	1.2	-	1.9	kVrms

3.4 Test Circuit

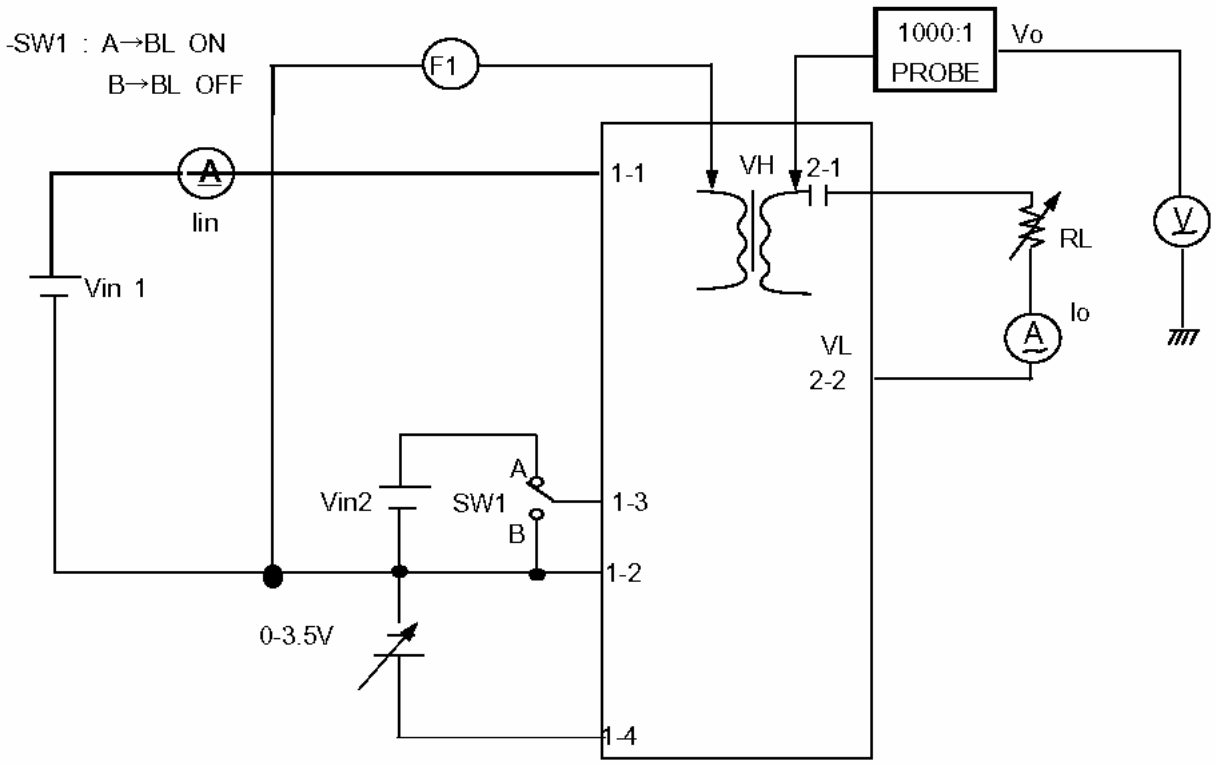

4. INTERFACE


4.1 CN1 CONNECTOR :12505WR-05A00(P)(YEONHO) or equivalent

PIN NO	SYMBOL	REMARK
1	DC-IN(Vin)	DC INPUT Power (12V)
2	GND	GND
3	BL ON/OFF	CCFL Drive SIGNAL(Active HIGH)
4	BRT_ADJ	0 ~ 3.5V
5	N.C	

4.2 CN2 CONNECTOR : 35001WR-02A00(P)(YEONHO) or Equivalent

PIN NO.	SYMBOL	REMARK
1	HOT	HIGH
2	COLD	LOW

5. APPEARANCE (UNIT : mm)

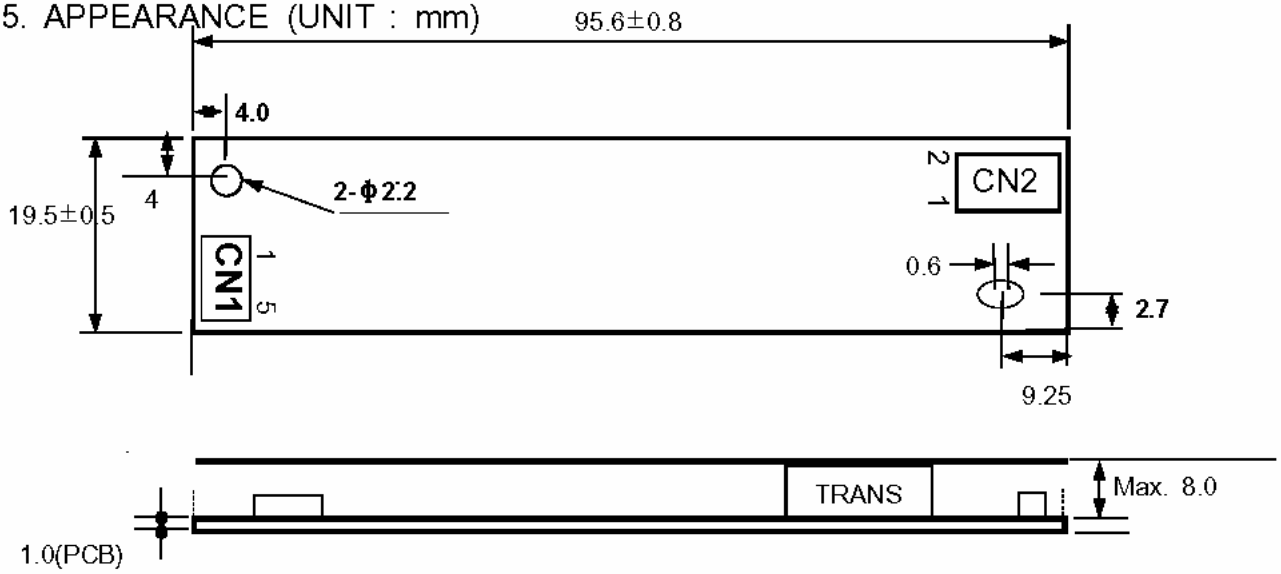

6. NOTATION OF LOT NUMBER

MARKING : BOTTOM OF PCB.

GH025A
YYWWMMMM


GH025A	: MODEL NAME	
YY	: YEAR OF PRODUCT	00,'01....,98,99
WW	: WEEK OF PRODUCT	01,02,03,04,...53
MMMM	: SERIAL NUMBER	0001,0002.....9998,9999

11. RELIABILITY TEST SPEC


NO.	ITEM	CONDITIONS AND METHOD
1	High Temperature Storage Test	Temp : 70℃ Duration 500hrs
2	Low Temperature Storage Test	Temp : -30℃ Duration 500hrs
3	High Temperature High Humidity Storage	Temp : 40℃ Humid 95%RH Duration 500hrs
4	High Temperature High Humidity Operation test	Temp : 40℃ Humid 95%RH Duration 1000hrs
5	Thermal Shock Test	Temp -30℃ ↔ 70℃,250cycle (30min) (30min)
6	Vibration test	Amplitude :1.5mm Frequency :10~55Hz Position : three perpendicular planes Duration 1000hrs
7	High Temperature Operation test	Temp : 50℃ Duration 72hrs
8	Low Temperature Operation test	Temp : 0℃ Duration 72hrs

12. PACKING


12.1 BOX

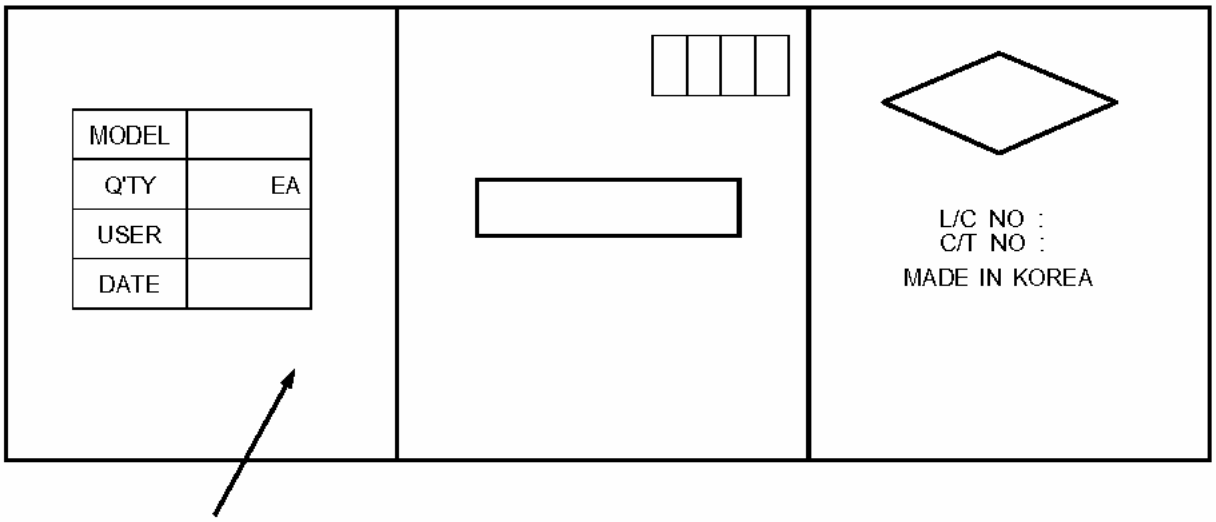

MODEL	GH025A
Q,TY	000 EA
USER	
DATE	00.00.00

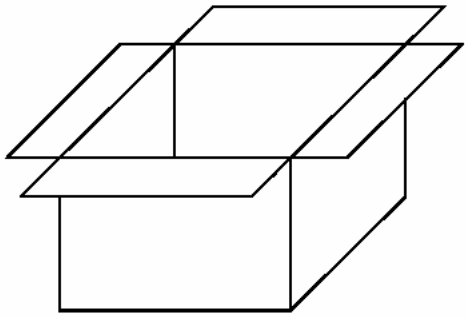

12.2 TRAY

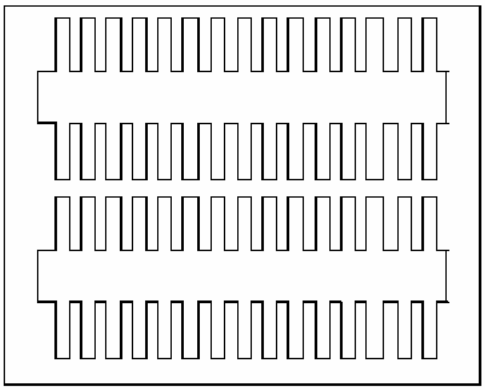

1 TRAY : 30EA

1 BOX : 10 TRAY (300EA)

Our company network supports you worldwide with offices in Germany, Turkey, Great Britain and the USA. For more information please contact your local distributor:

DISTEC

Distec GmbH
Industriestr. 1
D-82110 Germering
GERMANY

Phone +49 (0)89/ 89 43 63-0
Fax +49 (0)89/ 89 43 63-131
E-Mail: info@distec.de
Internet: www.distec.de

DATA DISPLAY TEKNOLOJI

Data Display Teknoloji Ltd. Sti.
Elektronik San. Ve
Dis. Tic. Ltd Sti.
Kustepe Leylak Sok.
Nursanlar Is Merkezi
Kat. 6 No: 21
Sisli / Istanbul
TURKEY

Phone +90 (0)212/ 356 04 20
Fax +90 (0)212/ 356 04 25
E-Mail: info@datadisplay.com.tr
Internet: www.datadisplay.com.tr

DISPLAY TECHNOLOGY

Display Technology Ltd.
A2 Spectrum Business Centre
Anthonys Way, Medway City Estate
Rochester, Kent, ME2 4NP
GREAT BRITAIN

Phone + 44 (0)1634/ 29 55 55
Fax + 44 (0)1634 / 29 55 43
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

APOLLO DISPLAY TECHNOLOGIES

Apollo Display Technologies LLC
85 Remington Blvd.
Ronkonkoma, NY 11779
USA

Phone 001 (631)580-43 60
Fax 001 (631)580-43 70
E-Mail: info@apollodisplays.com
Internet: www.apollodisplays.com