Printed-Circuit-Board transformers

Output Power: 6.0 VA

EI 42

10	**DIN EN 61558-2-6**	**VDE**	119359
VDE-Mark for Glow-Wire-Test	**DIN EN 60 335-1**	**VDE**	102961/84814
	UL 5085-3	**UL**	on request
	UL 5085-1	**UL**	E98173
	C22.2	**CSA**	on request




- according to REACH regulation
- according to RoHs regulation

- Output Power up to 6.0 VA
- Non short-circuit-proof at temperature class ta 70 °C/B
- Standard type cast housing “K” and “O”
- Excellent temperature fluctuation resistance properties
- High electrical safety and long service life features
- High voltage resistance
- Self-extinguishing cast housing and sealing material
- Per item tested quality with certificate

Protection extern secondary by:
- Micro fuse according to IEC 127 or
- PTC resistance

Connection scheme (only connected pins are present)

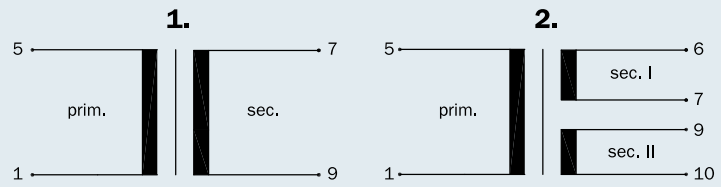


2.) double voltage – bridge: 7 + 9, double current – bridge: 6 + 9/ 7 + 10

Frame size/Core height	Output Power ta 70 °C/B	Height (h)	Weight	Packaging unit
BV EI 422 .... /14.8 mm	6.0 VA	32.3 mm	0.200 kg	30/21 pieces*

* it depends on kind of cast housing

Connecting pins type cast housing “0”

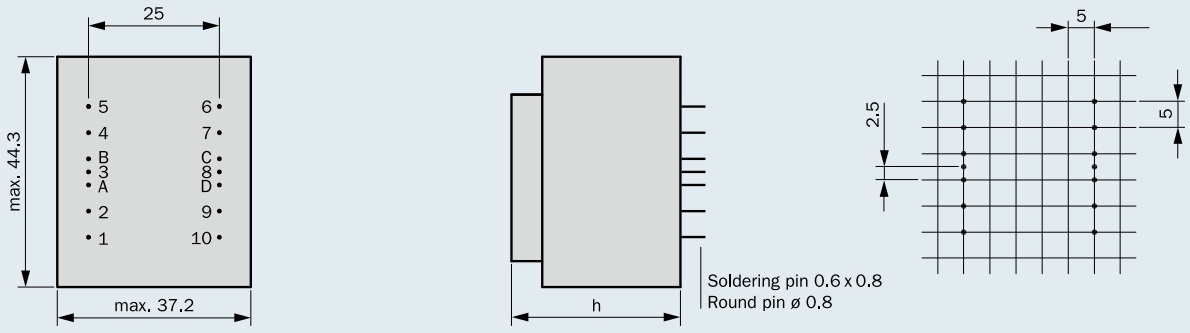

View looking onto pins

Dimensions without tolerances ± 0.3 mm,
rights to make alterations and improvements hereby reserved

Type cast housing “0”

6.0 VA
ta 70 °C/B

Frame size/Core height
BV EI 422..../
14.8 mm

non short-circuit-proof

no load power loss
type. 1.3 W

Order No.	Primary voltage V	Connecting pins prim.	Secondary voltage V	Current sec. mA	Connecting pins sec.	No-load voltage V	Connection scheme
BV EI 422 1320	230	1 – 5	1 x 6	1000	7–9	1 x 8.7	1
BV EI 422 1298	230	1 – 5	2 x 6	500	6–7/9–10	2 x 8.7	2
BV EI 422 1303	230	1 – 5	1 x 7.5	800	7–9	1 x 10.9	1
BV EI 422 1304	230	1 – 5	2 x 7.5	400	6–7/9–10	2 x 10.9	2
BV EI 422 1285	230	1 – 5	1 x 9	667	7–9	1 x 13.0	1
BV EI 422 1281	230	1 – 5	2 x 9	334	6–7/9–10	2 x 13.0	2
BV EI 422 1275	230	1 – 5	1 x 12	500	7–9	1 x 16.7	1
BV EI 422 1260	230	1 – 5	2 x 12	250	6–7/9–10	2 x 16.7	2
BV EI 422 1276	230	1 – 5	1 x 15	400	7–9	1 x 20.2	1
BV EI 422 1305	230	1 – 5	2 x 15	200	6–7/9–10	2 x 20.6	2
BV EI 422 1289	230	1 – 5	1 x 18	334	7–9	1 x 24.6	1
BV EI 422 1306	230	1 – 5	2 x 18	167	6–7/9–10	2 x 24.6	2
BV EI 422 1355	230	1 – 5	1 x 21	285	7–9	1 x 27.1	1
BV EI 422 1307	230	1 – 5	1 x 24	250	7–9	1 x 30.8	1