KOBITONE™ AUDIO COMPANY

Ultrasonic Transducers


Date: 08/12/13

Part Number:


255-400ST16-ROX
255-400SR16-ROX

Ultrasonic Transducers


Dimensions: mm (in.)

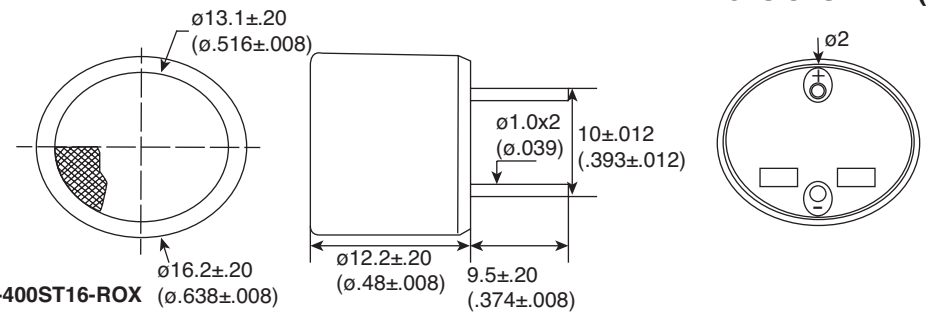

Directivity for 255-400ST16-ROX

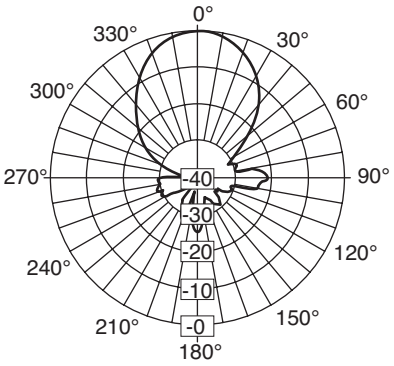


Sensitivity For 255-400SR16-ROX

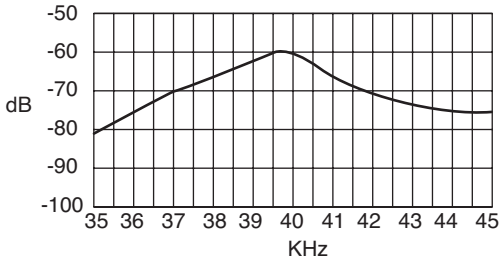


Sound Pressure for 255-400ST16-ROX




SPL Variation vs. Driving Voltage

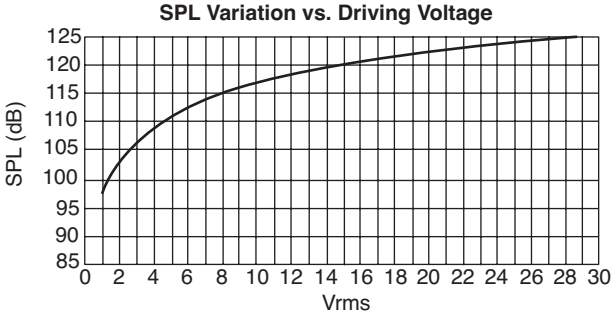

Impedance/Phase Angle vs. Frequency
Tested under 1Vrms Oscillation Level

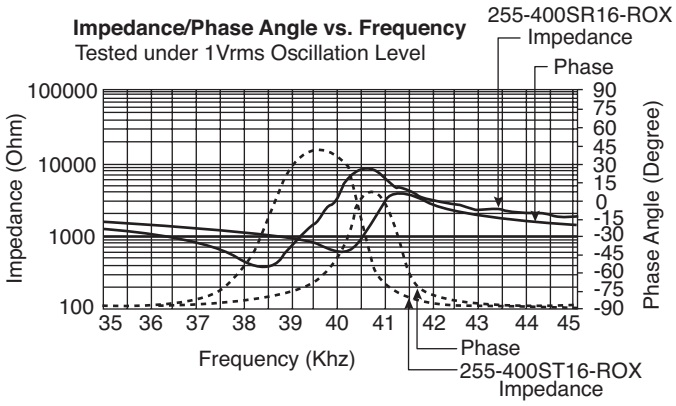

Sensitivity/Sound Pressure Level
Tested under 10Vrms @30cm

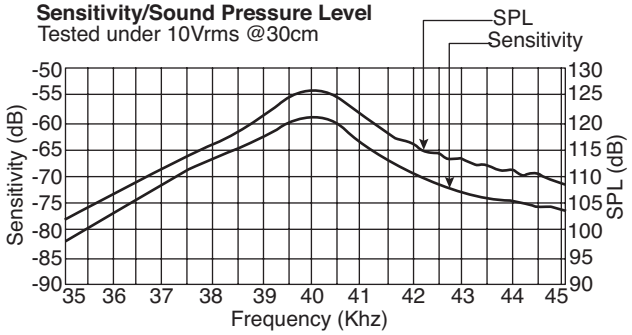

KT-400244

Electrical Specifications:

- Center Frequency (f_0): 40.0KHz±1.0KHz
- SPL @ f_0 for 255-400ST16-ROX: 119dB (0dB re 0.0002μ bar)
- Sensitivity @ f_0 for 255-400SR16-ROX: -65dB (0dB=1V/μ bar)
- Bandwidth (-6dB): 255-400ST16-ROX - 2KHz; 255-400SR16-ROX - 2.5KHz
- Allowable Input Power: 0.2W
- Capacitance: 2,400pF±20% @ 1KHz

Mechanical Specifications:

- Type: Transmitter - 255-400ST16-ROX; Receiver - 255-400SR16-ROX
- Operating Temperature: -30°C ~ +85°C
- Storage Temperature: -40°C ~ +100°C

Note:

- RoHS Compliant by Exemption

Available from Mouser Electronics **www.mouser.com** **(800) 346-6873**

Specifications are subject to change without notice. No liability or warranty implied by this information. Environmental compliance based on producer documentation.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kobitone:

255-400SR16-ROX 255-400ST16-ROX