SHINDENGEN

Super Fast Recovery Rectifiers

Dual

S20LC20U

200V 20A

FEATURES

- Low noise
- trr35ns
- Small θ jc
- Dielectric strength 2kV guaranteed


APPLICATION

- Switching power supply
- Free Wheel
- Home Appliances, Office Equipment, Factory Automation

OUTLINE DIMENSIONS

Case : MTO-3P

Unit : mm

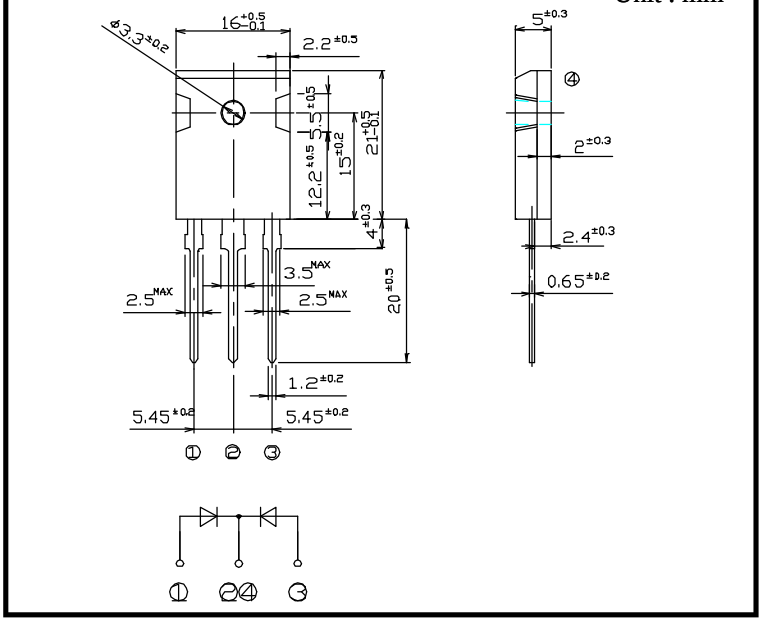

RATINGS

●Absolute Maximum Ratings (If not specified Tc=25°C)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	Tstg		-40～150	°C
Operating Junction Temperature	Tj		150	°C
Maximum Reverse Voltage	V_{RM}		200	V
Average Rectified Forward Current	Io	50Hz sine wave, R-load, Rating for each diode Io/2, Tc=123°C	20	A
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, Tj=25°C	140	A
Mounting Torque	TOR	(Recommended torque 0.5N･m)	0.8	N･m

●Electrical Characteristics (If not specified Tc=25°C)


Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	I_F=10A, Pulse measurement, Rating of per diode	Max.0.98	V
Reverse Current	I_R	V_R=V_{RM}, Pulse measurement, Rating of per diode	Max.10	μA
Reverse Recovery Time	trr	I_F=0.5A, I_R=1A, Rating of per diode	Max.35	ns
Thermal Resistance	θ jc	junction to case	Max.1.2	°C/W


Copyright & Copy;2000 Shindengen Electric Mfg.Co.Ltd

S20LC20U Forward Voltage

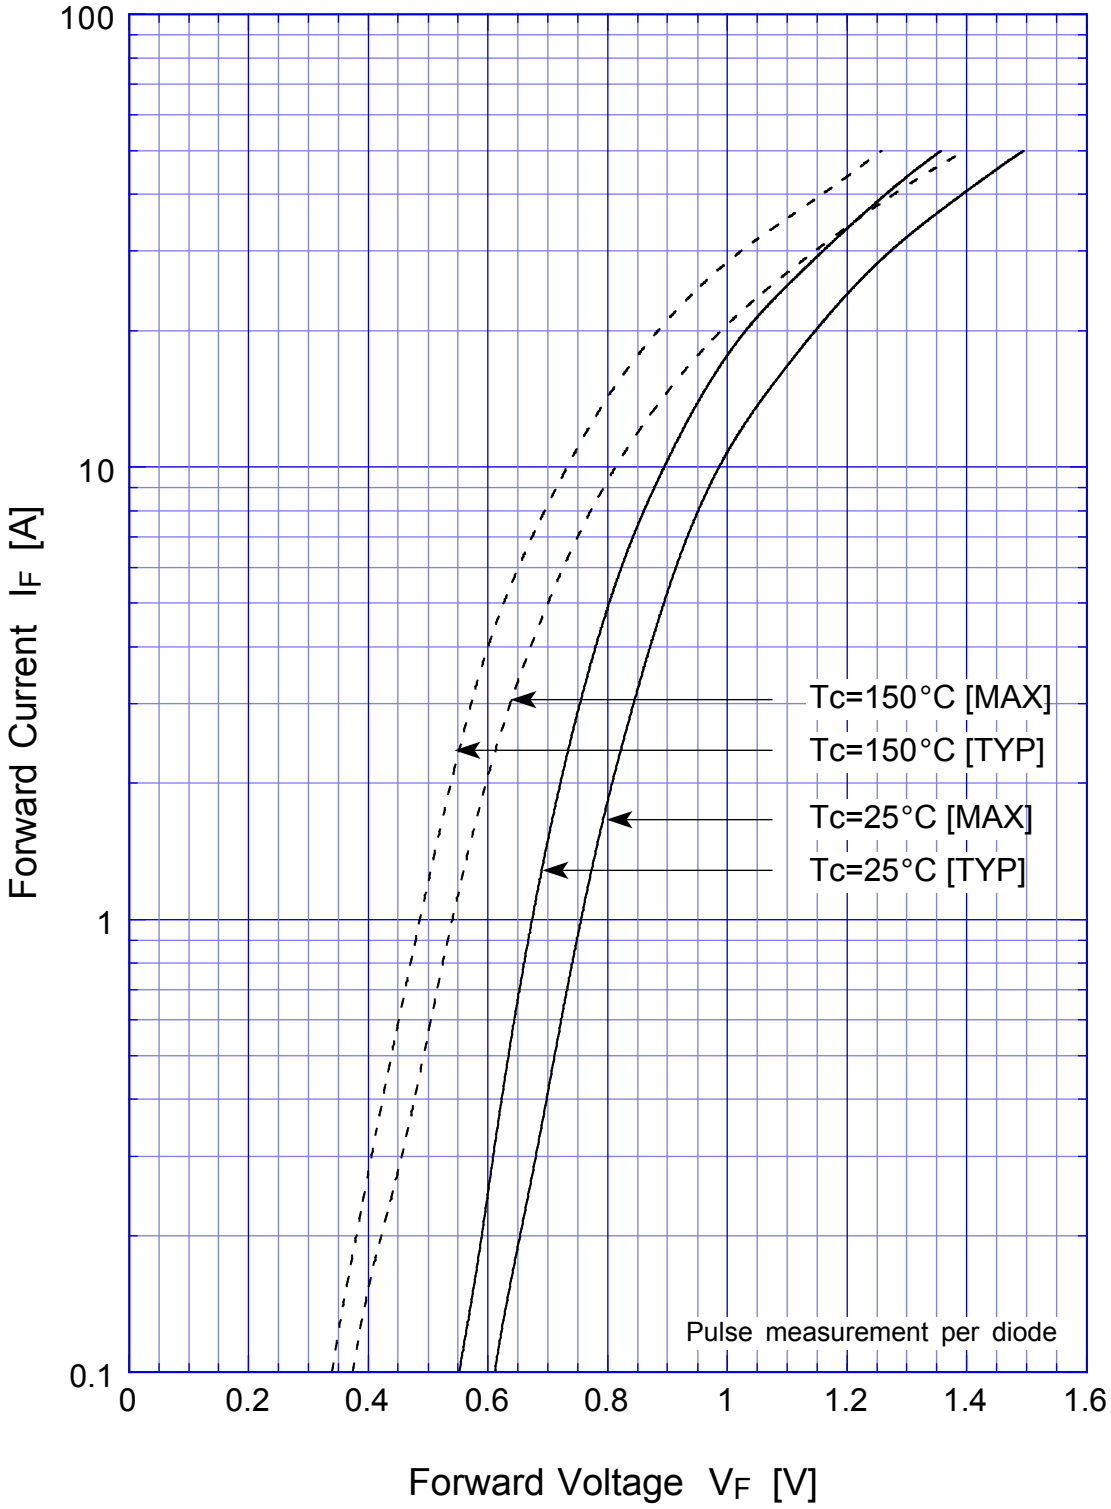



S20LC20U Forward Power Dissipation

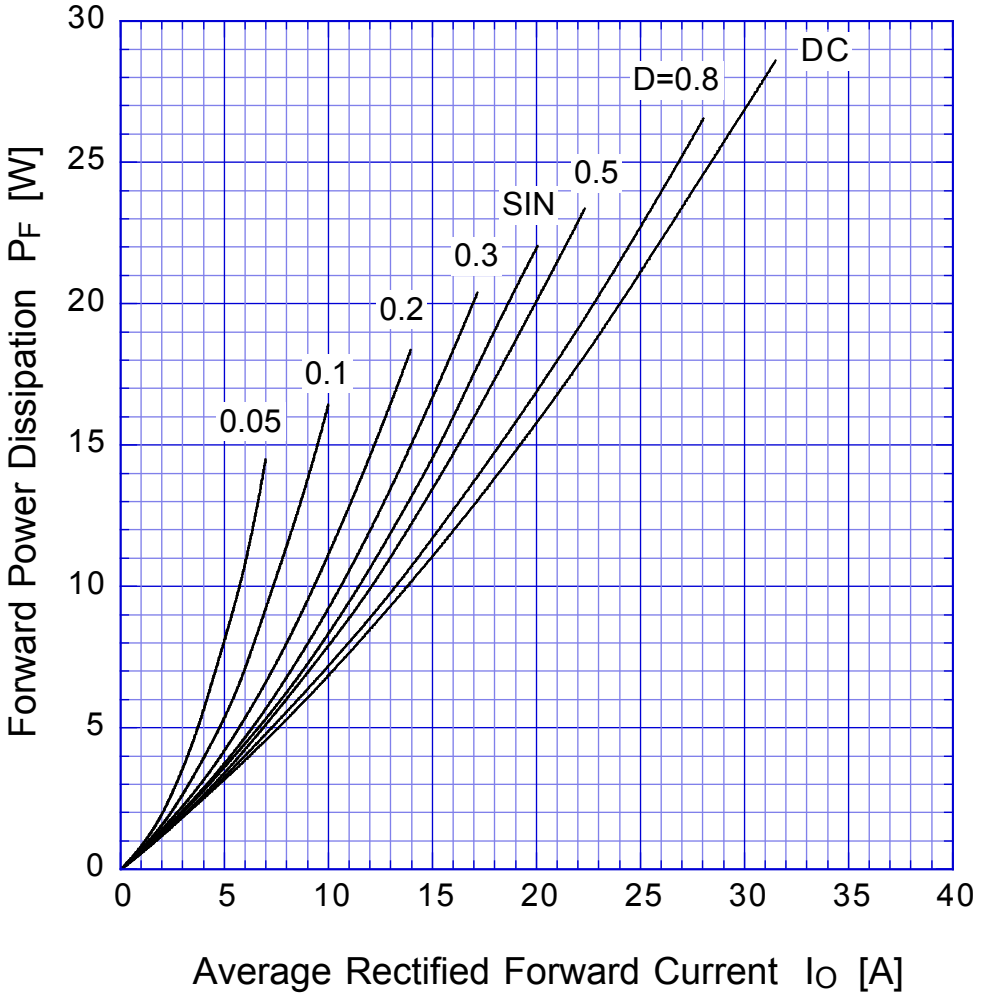

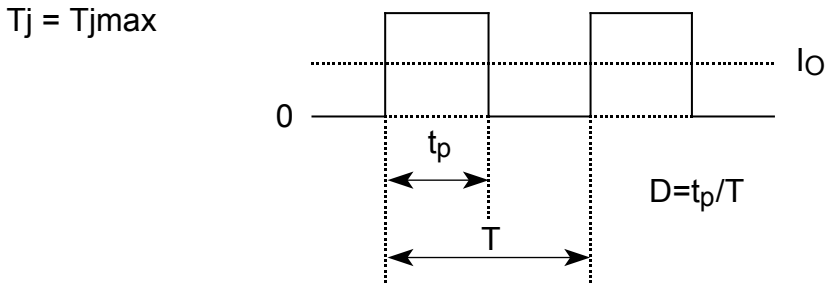


S20LC20U Derating Curve

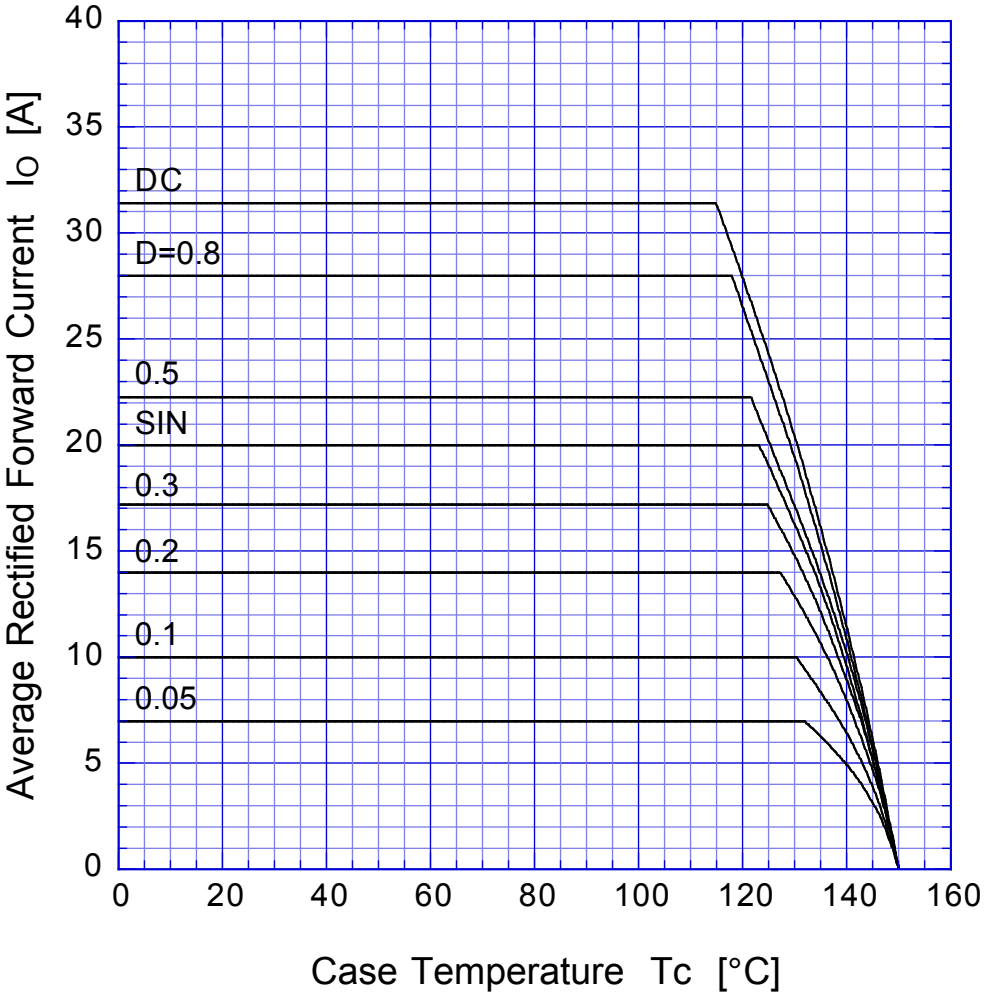

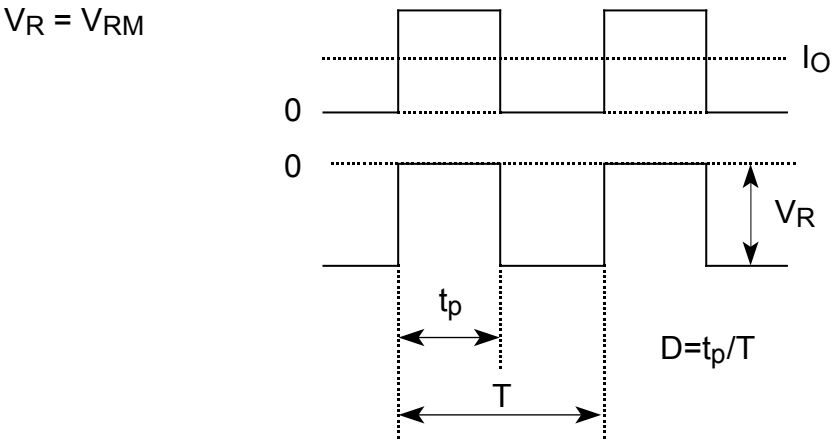

S20LC20U Peak Surge Forward Capability

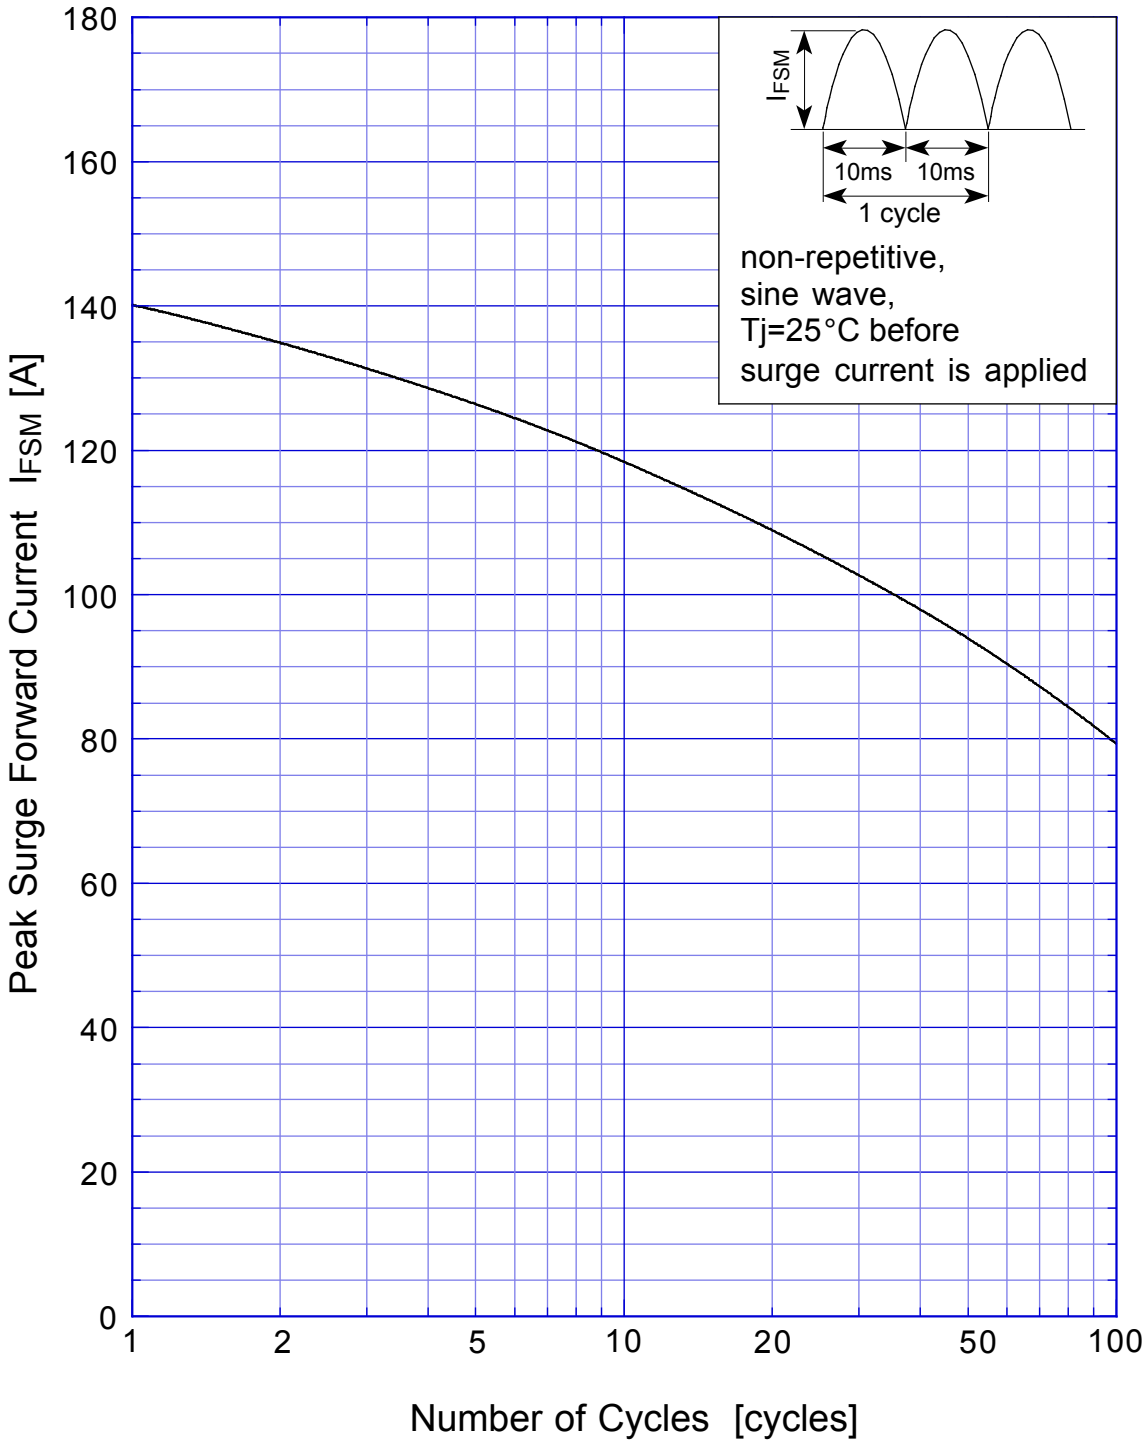

S20LC20U Junction Capacitance

