LND, INC.
OCEANSIDE, NEW YORK, USA

516-678-6141
info@LNDinc.com

712

End window-alpha-beta-gamma detector



GENERAL SPECIFICATIONS

MAXIMUM LENGTH (INCH/MM)	1.94/49.2
MAXIMUM DIAMETER (INCH/MM)	0.59/15.1
GAS FILLING	Ne +Halogen
EFFECTIVE LENGTH (INCH/MM)	1.5/38.1
CATHODE MATERIAL (INTERNAL/EXTERNAL)	446 Stainless Steel

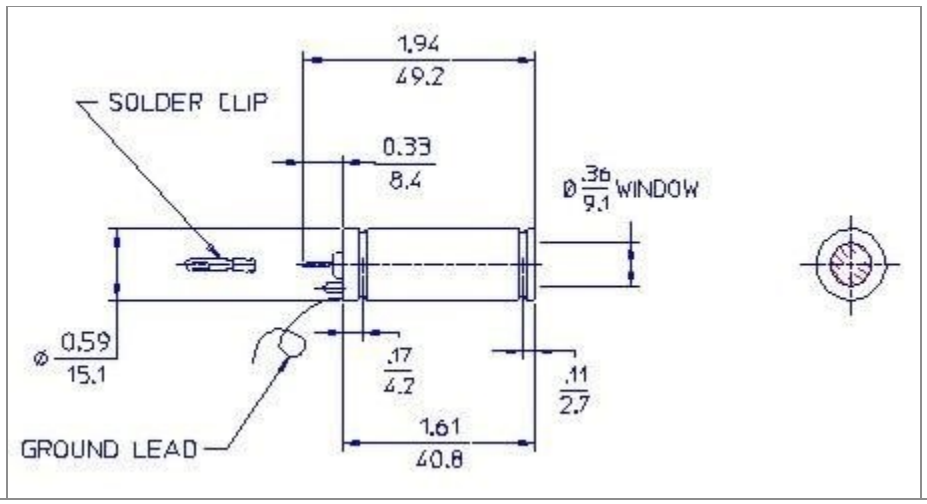
EFFECTIVE DIAMETER (INCH/MM)	.36/9.1
CONNECTOR	Pin
OPERATING TEMPERATURE RANGE °C	-40 to +75

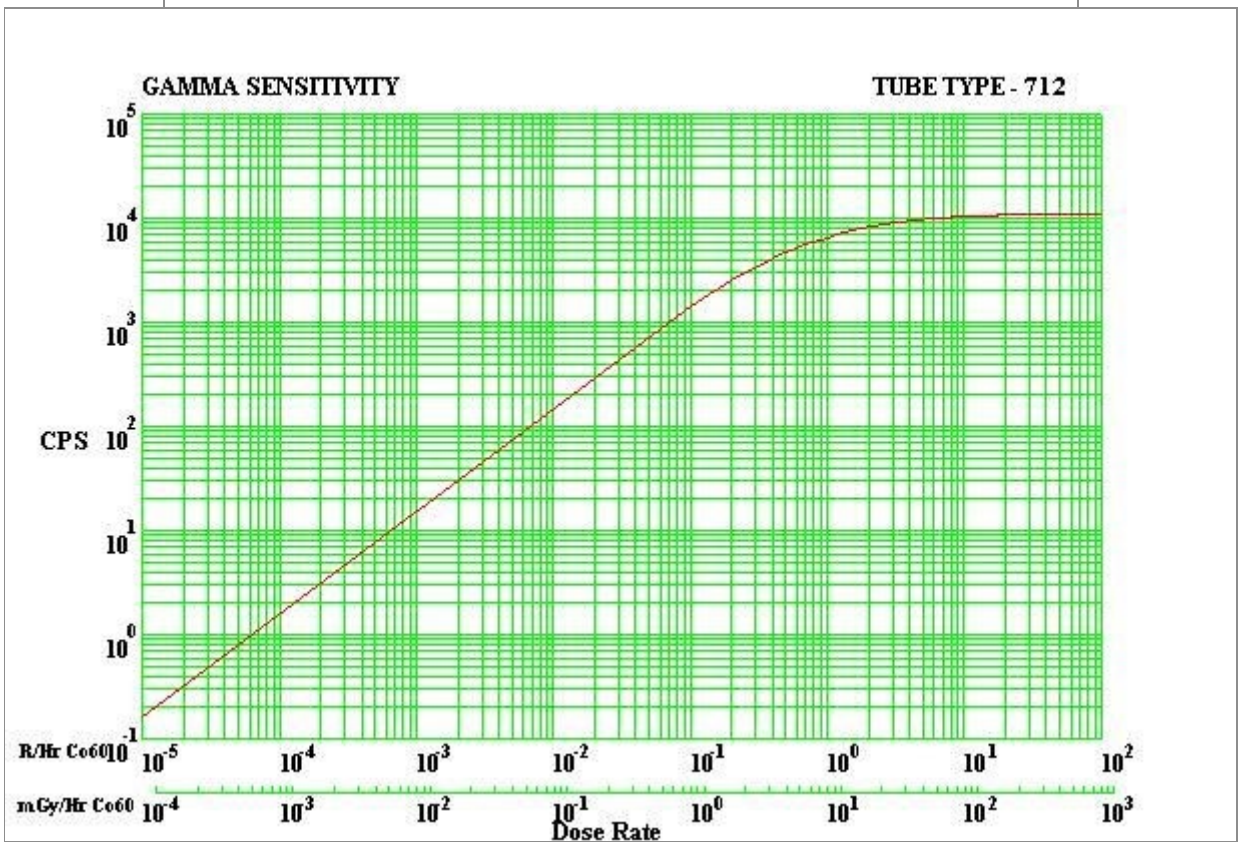
WINDOW SPECIFICATIONS

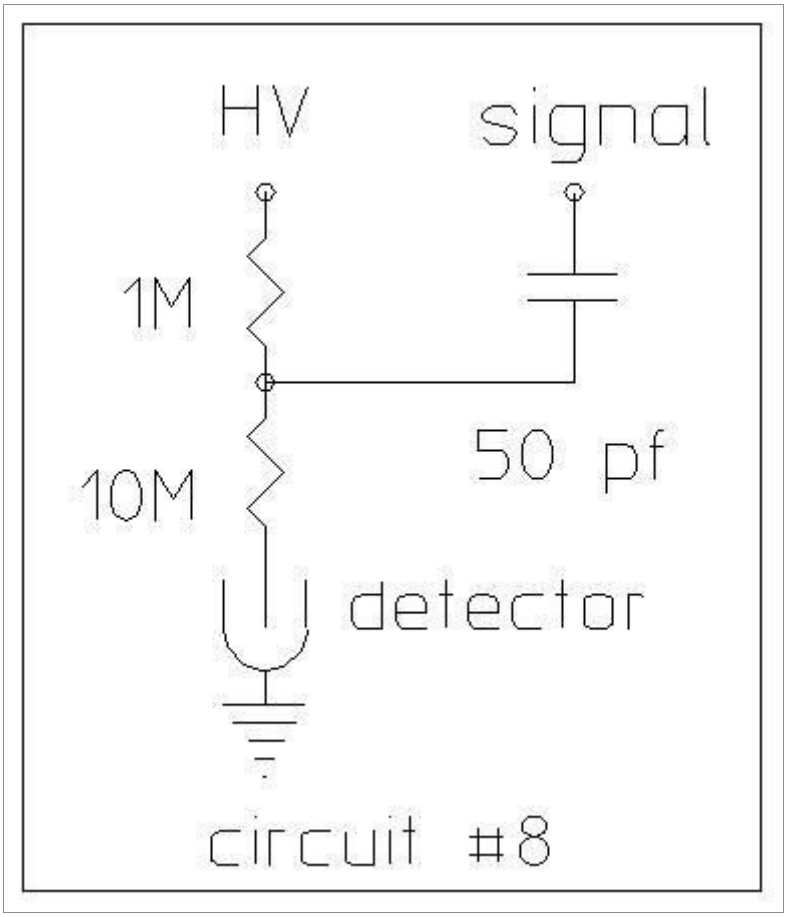
MATERIAL	Mica
EFFECTIVE DIAMETER (INCH/MM)	0.36/9.1
AREAL DENSITY (MG/CM²)	1.5 - 2.0

ELECTRICAL SPECIFICATIONS

RECOMMENDED OPERATING VOLTAGE (VOLTS)	500
RECOMMENDED ANODE RESISTOR (MEG OHM)	10
OPERATING VOLTAGE RANGE (VOLTS)	450 - 650
MAXIMUM PLATEAU SLOPE (%/100 VOLTS)	6
MINIMUM DEAD TIME (MICRO SEC)	90
GAMMA SENSITIVITY CO60 (CPS/mR/HR)	18
TUBE CAPACITANCE (PF)	3
WEIGHT (GRAMS)	8
MAXIMUM BACKGROUND SHIELDED 50MM PB + 3MM AL (CPM)	10
MAXIMUM STARTING VOLTAGE (VOLTS)	325


1.94
49.2
SOLDER CLIP
0.33
8.4
Ø .36 WINDOW
9.1
Ø 0.59
15.1
.17
4.2
.11
2.7
1.61
40.8
GROUND LEAD


GAMMA SENSITIVITY
TUBE TYPE - 712
CPS
R/Hr Co60
mGy/Hr Co60
Dose Rate


HV
signal
1M
50 pf
10M
detector
circuit #8

