ERD32 (3A) (100 to 200V / 3A)

FAST RECOVERY DIODE

■ Outline drawings, mm

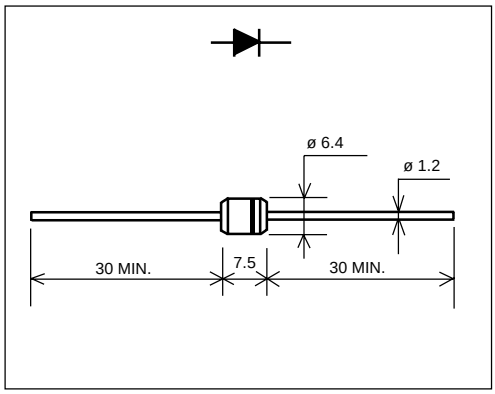

■ Features

- Super high speed switching
- Low V_F in turn on
- High reliability

■ Marking

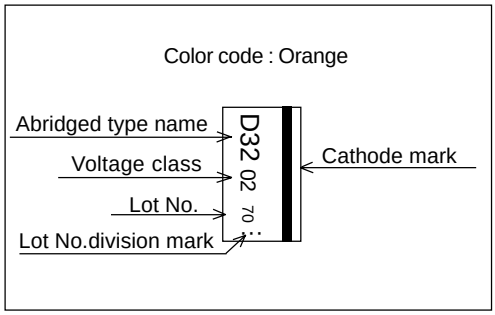

■ Applications

- High speed switching

■ Maximum ratings and characteristics

● Absolute maximum ratings

Item	Symbol	Conditions	Rating		Unit
			-01	-02	
Repetitive peak reverse voltage	V_{RRM}		100	200	V
Non-repetitive peak renerse voltage	V_{RSM}		100	200	V
Average forward current	$I_{F(AV)}$	Resistive load (Ta =25°C)	3*		A
Surge current	I_{FSM}	Sine wave 10ms	150		A
Operating junction temperature	T_j		-40 to +150		°C
Storage temperature	T_{stg}		-40 to +150		°C

* With cooling Cu fin both lead(1t x 15 x 15)

● Electrical characteristics (Ta=25°C Unless otherwise specified)

Item	Symbol	Conditions	Max.		Unit
			-01	-02	
Forward voltage drop	V_{FM}	I_{FM}=3A	0.92		V
Reverse current	I_{RRM}	$V_R=V_{RRM}$	10	50	µA
Reverse recovery time	t rr	I_F=0.1A, I_R=0.1A	100		ns

■ Characteristics

Forward characteristics

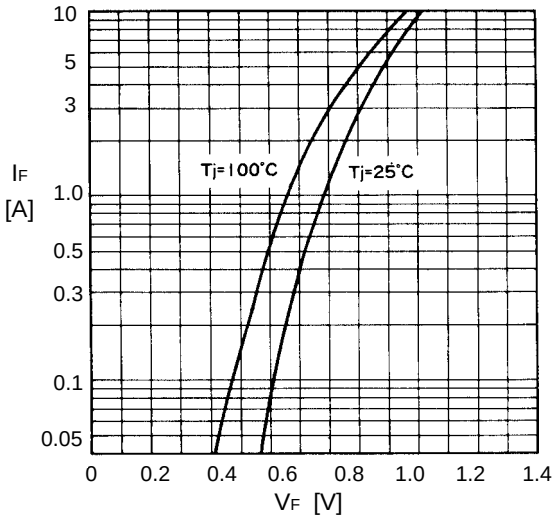

Reverse characteristics

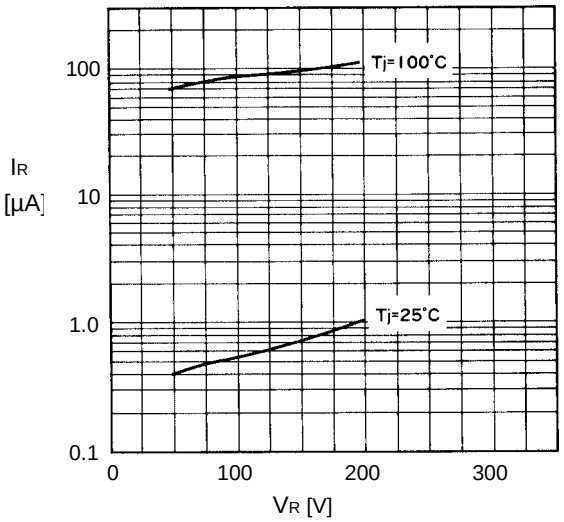

Current derating ($I_{F(AV)}$-T_a)

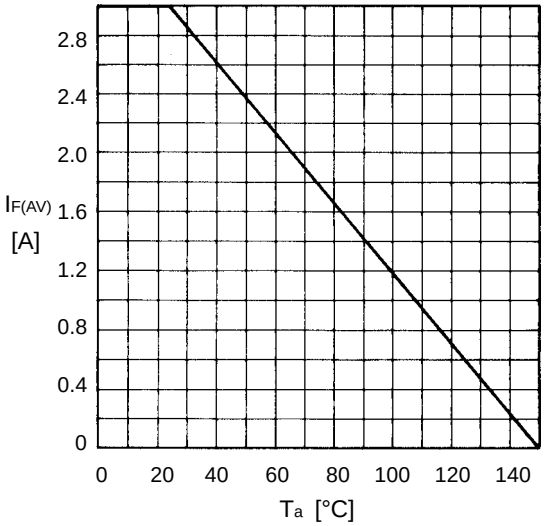

Junction capacitance characteristics

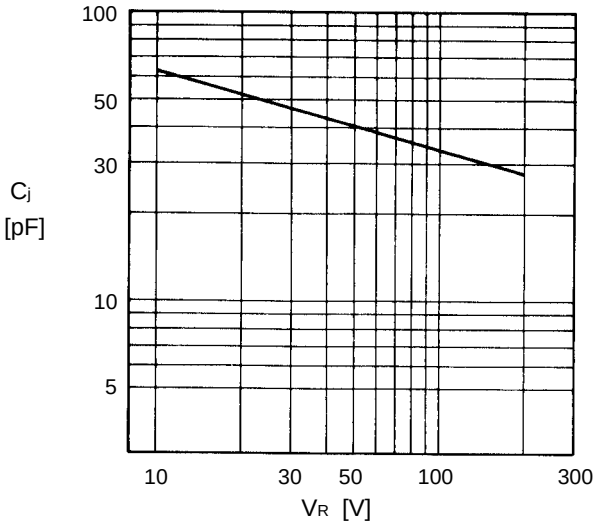

Surge capability

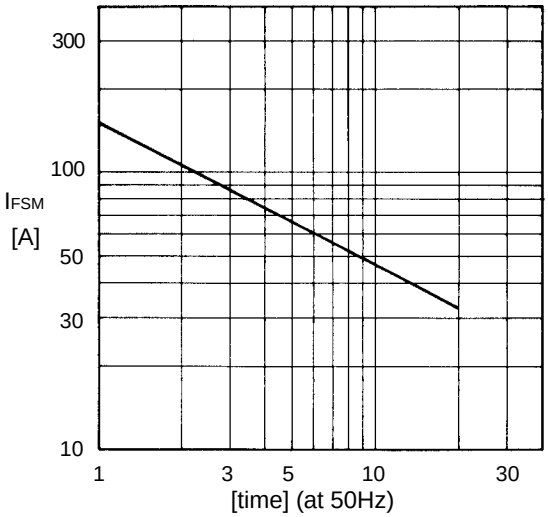

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.