
NA100-P Current Transducer

Applications:

For the electronic measurement of currents: AC, DC IMPL.,etc.,with galvanic isolation between the primary (high power) and the secondary (electronic) circuits.

Main technical data:



1. Primary normal current I_{PN}: 100A r.m.s
2. Primary current, measuring range I_P: 0~+/-150A
3. Measuring resistance:

		$R_M$min	$R_M$max
with +/-12V	@ +/-100A max:	0 ohm	42 ohm
	@ +/-120A max:	0 ohm	14 ohm
with +/-15V	@ +/-100A max:	20 ohm	100 ohm
	@ +/-150A max:	20 ohm	25 ohm

4. Secondary normal current: 50mA rms
5. Conversion ratio: 1:2000
6. Supply voltage(+/-5%): +/-12V~+/-15V
7. Current consumption: 10mA+ Secondary output current
8. Isolation test: Between the primary circuit to the secondary circuit: 2.5kVrms/50Hz/1min

Accuracy – Dynamic performance data:

1. Accuracy @ I_{PN}, T_A=+25 °C , @+/-12V~+/-15V: +/-0.7%
2. Non-linearity: better than +/-0.2%
3. Offset current: not more than +/-0.1mA(@+25°C)
4. Residual current @ I_P=0 after an overload of 3xI_P: +/-0.3mA
5. Thermal drift: +/-0.25mA(-25 °C ~+85 °C)

   +/-0.50mA(-40 °C ~+25 °C)
6. Reaction time @10% of $I_{P\,max}$: less than 500ns
7. Response time: not more than 1us
8. di/dt accurately followed: better than 100A/us
9. Frequency Bandwidth (0.5dB): DC 0~200kHz


General data:

1. Operating temperature: -40ºC~+85ºC
2. Storage temperature: -40 ºC ~+90 ºC
3. Secondary coil resistance: not more than 120 ohm
4. Weight: 25g
5. Standards: EN 50155

Features:

1. Hall effect measuring principle
2. Galvanic isolation between primary and secondary circuit
3. Insulated plastic case made of white PPO recognized according to UL 94-V0
4. The whole current transducer comply with RoHS Directive completely

Dimension:

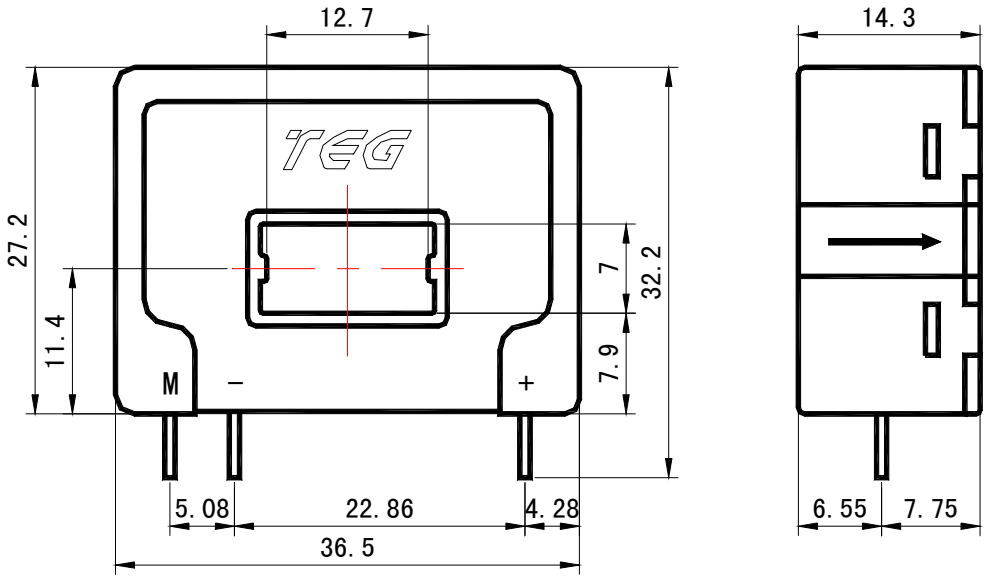

Connection:

