NA50-P/SP1 Current Transducer

Application:

For the electronic measurement of currents: AC, DC IMPL.,etc.,with galvanic isolation between the primary (high power) and the secondary (electronic) circuits.



Main technical data:

1. Primary normal current I_{PN}: 50A r.m.s
2. Primary current, measuring range I_P: 0~±100A
3. Measuring resistance:

		$R_M$min	$R_M$max
with ±12V	@ ±50A max:	0 ohm	210 ohm
	@ ±100A max:	0 ohm	30ohm
with ±15V	@±50A max:	30 ohm	330ohm
	@ ±70A max:	30ohm	90ohm

4. Secondary normal current: 25mA rms
5. Conversion ratio: 1:2000
6. Supply voltage(1±5%): ±12V~±15V
7. Current consumption: 10mA+ Secondary output current
8. Isolation test: Between the primary circuit and the secondary circuit(+.-.M):2.5kV/50Hz/1min

Accuracy – Dynamic performance data:

1. Accuracy @ I_{PN}, T_A=+25 ℃ , @±12V~±15V: ±0.65%
2. Non-linearity: ≤0.2%
3. Offset of zero current:≤±0.1mA (@+25℃)
4. Residual current @ I_P=0, T_A=+25 °C, after an overload of 3xI_P: ±0.3mA
5. Thermal drift: ≤±0.25mA (0 ℃ ~+70 ℃)
   ≤±0.3mA (-25℃ ~+85℃)
6. Reaction time @10% of $I_{P\,max}$: less than 500ns
7. Response time: ≤ 1us
8. di/dt accurately followed: better than 200A/us


General data:

1. Operating temperature: -25ºC~+85ºC
2. Storage temperature: -40 °C ~+90 °C
3. Secondary coil resistance: not more than 150 ohm
4. Weight: 25g
5. Standards: EN 50155

Features:

1. Zero magnetic flux Hall effect principle
2. Galvanic isolation between primary and secondary circuit
3. Insulated plastic case made of white PPO recognized according to UL 94-V0
4. The whole current transducer comply with RoHS Directive completely

Dimension：

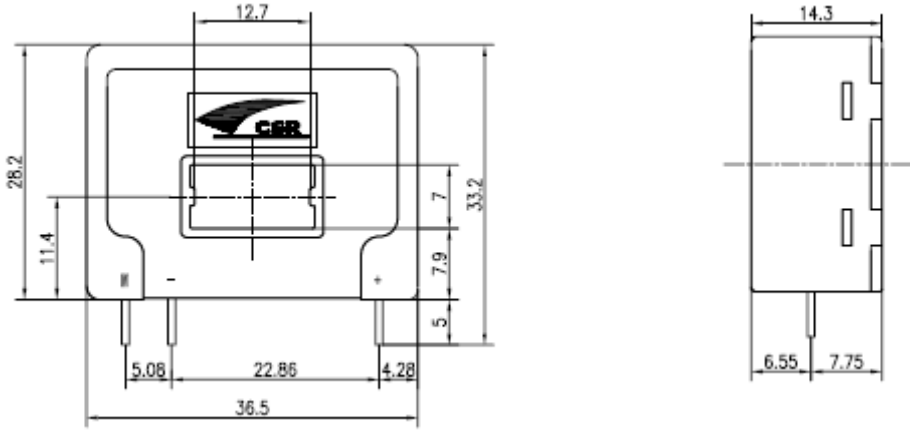

Connection：

