
Basic Switches
Subminiature

UM Series

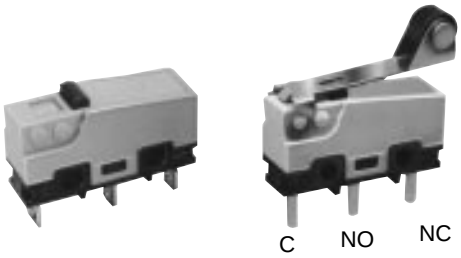

FEATURES
- Choice of low energy or power duty electrical ratings
- Variety of integral actuators
- Temperature Range: −25° to +85°C (−13° to 185°F)
- Weight: 2 grams (.07 oz.)
- UL/CSA/VDE/SEMKO marking designations
- Form C single-pole double-throw (SPDT) circuitry

ELECTRICAL RATINGS (in amps)

Voltage	UM50E Silver Contacts Resistive	UM50E Silver Contacts Inductive	UM40B/D Silver Contacts Resistive	UM40B/D Silver Contacts Inductive	UM10A/B/D/E Gold Contacts Resistive
125 VAC	5	3	3	2	0.1
250 VAC	5	3	3	2	0.1
30 VDC	5	3*	3	2*	0.1

*Time constant for DC inductive loads: less than 7 msec.
UL File No. E12252, CSA File LR23413M167

ORDER GUIDE 0.1 AMP TYPE GOLD CONTACTS

Rating	Actuator Length	O.F. max. grams **oz.**	Terminals Solder	Terminals .110 QC	R.F. min. g **ounces**	P.T. max. mm **inches**	O.T. min. mm **inches**	D.T. max. mm **inches**	O.P mm **inches**
0.1 Amp 250 VAC	A pin plunger	25 **.88**	UM10A10A01	UM10A70A01	2 **.071**	0,6 **.024**	0,4 **.016**	0,1 **.004**	8,4 ± 0,3 **.331 ± .012**
		50 **1.76**	UM10B10A01	UM10B70A01	7,5 **.265**	0,6 **.024**	0,4 **.016**	0,1 **.004**	8,4 ± 0,3 **.331 ± .012**
		100 **3.57**	UM10D10A01	UM10D70A01	15 **.529**	0,6 **.024**	0,4 **.016**	0,1 **.004**	8,4 ± 0,3 **.331 ± .012**
		150 **5.3**	UM10E10A01	UM10E70A01	20 **.705**	0,6 **.024**	0,4 **.016**	0,1 **.004**	8,4 ± 0,3 **.331 ± .012**
	B flat lever 18mm	10 **.35**	UM10A10B01	UM10A70B01	0,4 **.014**	2,5 **.098**	0,8 **.031**	0,5 **.020**	8,8 ± 0,8 **.346 ± .031**
		20 **.7**	UM10B10B01	UM10B70B01	1,7 **.060**	2,5 **.098**	0,8 **.031**	0,5 **.020**	8,8 ± 0,8 **.346 ± .031**
		40 **1.4**	UM10D10B01	UM10D70B01	3,5 **.123**	2,5 **.098**	0,8 **.031**	0,5 **.020**	8,8 ± 0,8 **.346 ± .031**
		60 **2.1**	UM10E10B01	UM10E70B01	4,0 **.141**	2,5 **.098**	0,8 **.031**	0,5 **.020**	8,8 ± 0,8 **.346 ± .031**
	C flat lever 20mm	8 **.28**	UM10A10C01	UM10A70C01	0,35 **.012**	2,8 **.110**	1,2 **.047**	0,8 **.031**	8,8 ± 0,8 **.346 ± .031**
		16 **.56**	UM10B10C01	UM10B70C01	1,5 **.053**	2,8 **.110**	1,2 **.047**	0,8 **.031**	8,8 ± 0,8 **.346 ± .031**
		35 **1.23**	UM10D10C01	UM10D70C01	3,0 **.106**	2,8 **.110**	1,2 **.047**	0,8 **.031**	8,8 ± 0,8 **.346 ± .031**
		55 **2**	UM10E10C01	UM10E70C01	3,5 **.123**	2,8 **.110**	1,2 **.047**	0,8 **.031**	8,8 ± 0,8 **.346 ± .031**
	D flat lever 26mm	12 **.4**	UM10B10D01	UM10B70D01	1,2 **.042**	3,5 **.138**	1,6 **.063**	1,0 **.039**	8,8 ± 1,2 **.346 ± .047**
		25 **.88**	UM10D10D01	UM10D70D01	2,5 **.088**	3,5 **.138**	1,6 **.063**	1,0 **.039**	8,8 ± 1,2 **.346 ± .047**
		45 **1.6**	UM10E10D01	UM10E70D01	3,0 **.106**	3,5 **.138**	1,6 **.063**	1,0 **.039**	8,8 ± 1,2 **.346 ± .047**

ORDER GUIDE 0.1 AMP TYPE GOLD CONTACTS cont.

Rating	Actuator Length	O.F. max. grams oz.	Terminals Solder	Terminals .110 QC	R.F. min. g ounces	P.T. max. mm inches	O.T. min. mm inches	D.T. max. mm inches	O.P mm inches
0.1 Amp 250 VAC 	J flat lever 60mm	6 **.2**	UM10B10J01	UM10B70J01	0,5 **.018**	8,5 **.335**	2,2 **.087**	2,5 **.098**	8,8 ± 2,4 **.346 ± .094**
		15 **.52**	UM10D10J01	UM10D70J01	1,0 **.035**	8,5 **.335**	2,2 **.087**	2,5 **.098**	8,8 ± 2,4 **.346 ± .094**
		20 **.7**	UM10E10J01	UM10E70J01	1,0 **.035**	8,5 **.335**	2,2 **.087**	2,5 **.098**	8,8 ± 2,4 **.346 ± .094**
0.1 Amp 250 VAC 	E simulated roller lever, radius 2,5mm, 19mm	16 **.56**	UM10B10E01	UM10B70E01	1,5 **.053**	2,8 **.110**	1,2 **.047**	0,8 **.031**	11,65 ± 0,8 **.459 ± .031**
		35 **1.23**	UM10D10E01	UM10D70E01	3,0 **.106**	2,8 **.110**	1,2 **.047**	0,8 **.031**	11,65 ± 0,8 **.459 ± .031**
		55 **2**	UM10E10E01	UM10E70E01	3,5 **.123**	2,8 **.110**	1,2 **.047**	0,8 **.031**	11,65 ± 0,8 **.459 ± .031**
	H simulated roller lever, radius 1,3mm, 19mm	16 **.56**	UM10B10H01	UM10B70H01	1,5 **.053**	2,8 **.110**	1,2 **.047**	0,8 **.031**	10,7 ± 0,8 **.421 ± .031**
		35 **1.23**	UM10D10H01	UM10D70H01	3,0 **.106**	2,8 **.110**	1,2 **.047**	0,8 **.031**	10,7 ± 0,8 **.421 ± .031**
		55 **2**	UM10E10H01	UM10E70H01	3,5 **.123**	2,8 **.110**	1,2 **.047**	0,8 **.031**	10,7 ± 0,8 **.421 ± .031**
0.1 Amp 250 VAC 	F roller lever 18,00mm	20 **.7**	UM10B10F01	UM10B70F01	1,7 **.060**	2,5 **.098**	0,8 **.031**	0,5 **.020**	14,50 ± 0,8 **.571 ± .031**
		40 **1.4**	UM10D10F01	UM10D70F01	3,5 **.123**	2,5 **.098**	0,8 **.031**	0,5 **.020**	14,50 ± 0,8 **.571 ± .031**
		60 **2.1**	UM10E10F01	UM10E70F01	4,0 **.141**	2,5 **.098**	0,8 **.031**	0,5 **.020**	14,50 ± 0,8 **.571 ± .031**

OTHER TERMINATION TYPES ARE AVAILABLE
For PC Straight cross-line, change 2nd set of numbers to 20 (Example: UM10A**20**A01)
For PC Straight international, change 2nd set of numbers to 40 (Example: UM10A**40**A01)
For PC Straight right angle, change 2nd set of numbers to 50 (Example: UM10A**50**A01)
For PC Straight left angle, change 2nd set of numbers to 60 (Example: UM10A**60**A01)

ORDER GUIDE 3 AND 5 AMP TYPE SILVER CONTACTS

Rating	Actuator Length	O.F. max. grams oz.	Terminals Solder	Terminals .110 QC	R.F. min. g ounces	P.T. max. mm inches	O.T. min. mm inches	D.T. max. mm inches	O.P mm inches
3 Amp 250 VAC	A pin plunger	50 **1.76**	UM40B10A01	UM40B70A01	7,5 **.265**	0,6 **.024**	0,4 **.016**	0,1 **.004**	8,4 ± 0,3 **.331 ± .012**
		100 **3.527**	UM40D10A01	UM40D70A01	15,0 **.529**	0,6 **.024**	0,4 **.016**	0,1 **.004**	8,4 ± 0,3 **.331 ± .012**
3 Amp 250 VAC	B flat lever 18mm	20 **.7**	UM40B10B01	UM40B70B01	1,7 **.060**	2,5 **.098**	0,8 **.031**	0,5 **.020**	8,8 ± 0,8 **.346 ± .031**
		40 **1.4**	UM40D10B01	UM40D70B01	3,5 **.123**	2,5 **.098**	0,8 **.031**	0,5 **.020**	8,8 ± 0,8 **.346 ± .031**
	C flat lever 20mm	16 **.56**	UM40B10C01	UM40B70C01	1,5 **.053**	2,8 **.110**	1,2 **.047**	0,8 **.031**	8,8 ± 0,8 **.346 ± .031**
		35 **1.23**	UM40D10C01	UM40D70C01	3,0 **.106**	2,8 **.110**	1,2 **.047**	0,8 **.031**	8,8 ± 0,8 **.346 ± .031**
	D flat lever 26mm	12 **.4**	UM40B10D01	UM40B70D01	1,2 **.042**	3,5 **.138**	1,6 **.063**	1,0 **.039**	8,8 ± 1,2 **.346 ± .047**
		25 **.88**	UM40D10D01	UM40D70D01	2,5 **.088**	3,5 **.138**	1,6 **.063**	1,0 **.039**	8,8 ± 1,2 **.346 ± .047**
	J flat lever 60mm	6 **.2**	UM40B10J01	UM40B70J01	0,5 **.018**	8,5 **.335**	2,2 **.087**	2,5 **.098**	8,8 ± 2,4 **.346 ± .094**
		15 **.52**	UM40D10J01	UM40D70J01	1,0 **.035**	8,5 **.335**	2,2 **.087**	2,5 **.098**	8,8 ± 2,4 **.346 ± .094**
3 Amp 250 VAC	E simulated roller lever, radius 2,5mm 19mm	16 **.56**	UM40B10E01	UM40B70E01	1,5 **.053**	2,8 **.110**	1,2 **.047**	0,8 **.031**	11,65 ± 0,8 **.459 ± .031**
		35 **1.23**	UM40D10E01	UM40D70E01	3,0 **.106**	2,8 **.110**	1,2 **.047**	0,8 **.031**	11,65 ± 0,8 **.459 ± .031**
	H simulated roller lever, radius 1,3mm 19,15mm	16 **.56**	UM40B10H01	UM40B70H01	1,5 **.053**	2,8 **.110**	1,2 **.047**	0,8 **.021**	10,7 ± 0,8 **.421 ± .031**
		35 **1.23**	UM40D10H01	UM40D70H01	3,0 **.106**	2,8 **.110**	1,2 **.047**	0,8 **.031**	10,7 ± 0,8 **.421 ± .031**
	F roller lever 18mm	20 **.7**	UM40B10F01	UM40B70F01	1,7 **.060**	2,5 **.098**	0,8 **.031**	0,5 **.020**	14,50 ± 0,8 **.571 ± .031**
		40 **1.4**	UM40D10F01	UM40D70F01	3,5 **.123**	2,5 **.098**	0,8 **.031**	0,5 **.020**	14,50 ± 0,8 **.571 ± .031**
5 Amp 250 VAC	A pin plunger	150 **5.3**	UM50E10A01	UM50E70A01	20 **.705**	0,6 **.024**	0,4 **.016**	0,1 **.004**	8,4 ± 0,3 **.331 ± .012**
	B flat lever 18mm	60 **2.1**	UM50E10B01	UM50E70B01	4,0 **.141**	2,5 **.098**	0,8 **.031**	0,5 **.020**	8,8 ± 0,8 **.346 ± .031**
	C flat lever 20mm	55 **2**	UM50E10C01	UM50E70C01	3,5 **.123**	2,8 **.110**	1,2 **.047**	0,8 **.031**	8,8 ± 0,8 **.346 ± .031**
	D flat lever 26mm	45 **1.6**	UM50E10D01	UM50E70D01	3,0 **.106**	3,5 **.138**	1,6 **.063**	1,0 **.039**	8,8 ± 1,2 **.346 ± .047**
	J flat lever 60mm		UM50E10J01	UM50E70J01	1,0 **.035**	8,5 **.335**	2,2 **.087**	2,5 **.098**	8,8 ± 2,4 **.346 ± .094**
	E simulated roller lever, radius 2,5mm 19mm	55 **2**	UM50E10E01	UM50E70E01	3,5 **.123**	2,8 **.110**	1,2 **.047**	0,8 **.031**	11,65 ± 0,8 **.459 ± .031**
	H simulated roller lever, radius 1,3mm 19mm	55 **2**	UM50E10H01	UM50E70H01	3,5 **.123**	2,8 **.110**	1,2 **.047**	0,8 **.031**	10,7 ± 0,8 **.421 ± .031**
	F roller lever 18mm	60 **2.1**	UM50E10F01	UM50E70F01	4,0 **.141**	2,5 **.098**	0,8 **.031**	0,5 **.020**	14,50 ± 0,8 **.571 ± .031**

OTHER TERMINATION TYPES ARE AVAILABLE
For PC Straight cross-line, change 2nd set of numbers to 20 (Example: UM40B**20**A01)
For PC Straight international, change 2nd set of numbers to 40 (Example: UM40B**40**A01)
For PC Straight right angle, change 2nd set of numbers to 50 (Example: UM40B**50**A01)
For PC Straight left angle, change 2nd set of numbers to 60 (Example: UM40B**60**A01)