NEC
ELECTRON DEVICE

Phase-out/Discontinued

DIODE ARRAY
μPA64H


HIGH SPEED SWITCHING
SILICON EPITAXIAL DIODE ARRAY

DESCRIPTION

The μPA64H is a common anode monolithic array of six high speed switching diodes.

PACKAGE DIMENSIONS

in millimeters

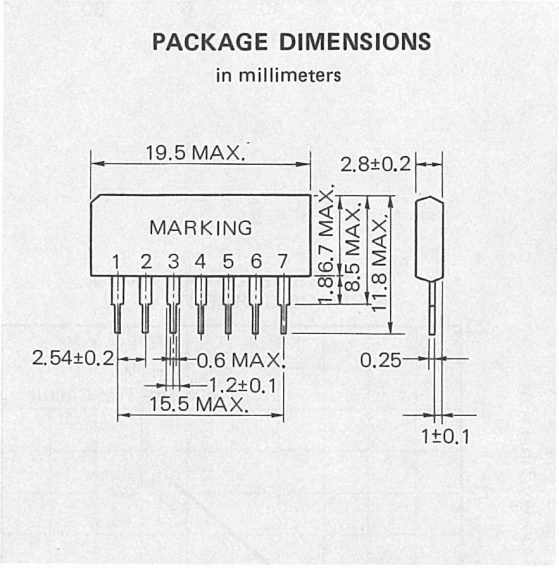

FEATURES


- High Speed Switching Time → t_{rr} 4.0 ns TYP.
- Small Terminal Capacitance → Ct 5.0 pF TYP.
- Small Size enables High Density Mounting
- Good Electrical Thermal Balance of Six Diode due to 1 Chip Structure
- Package is 7 pin PLASTIC SIP.

ABSOLUTE MAXIMUM RATINGS

Maximum Voltages and Currents (T_a = 25 °C)			
Peak Reverse Voltage	V_{RM}	75	V
Reverse Voltage	V_R	50	V
Peak Forward Surge Current (1 μs)	$I_{F\ (surge)}$	1.0*	A
Peak Forward Current	I_{FM}	200*	mA
Average Rectified Current	I_O	100*	mA
Maximum Power Dissipation (Ta=25 °C)			
Power Dissipation	P	300**	mW
Maximum Temperatures			
Junction Temperature	T_j	125	°C
Storage Temperature	T_{stg}	−55 to +125	°C

* 1 Unit ** Package

PIN CONNECTION



Common Anode

ELECTRICAL CHARACTERISTICS (Ta = 25 °C)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Forward Voltage	V_F		0.8	1.0	V	I_F=30 mA
Reverse Current	I_R		0.005	0.1	μA	V_R=30 V
Terminal Capacitance*	Ct		5.0	8.0	pF	V_R=0, f=1.0 MHz
Reverse Recovery Time	t_{rr}		4.0	8.0	ns	See t_{rr} Reverse Recovery Time Test Circuit

* 1 Unit


Nippon Electric Co.,Ltd.

© 1981 NEC Corporation


Phase-out/Discontinued

TYPICAL CHARACTERISTICS (Ta = 25 °C)


FOWARD CURRENT vs. FORWARD VOLTAGE

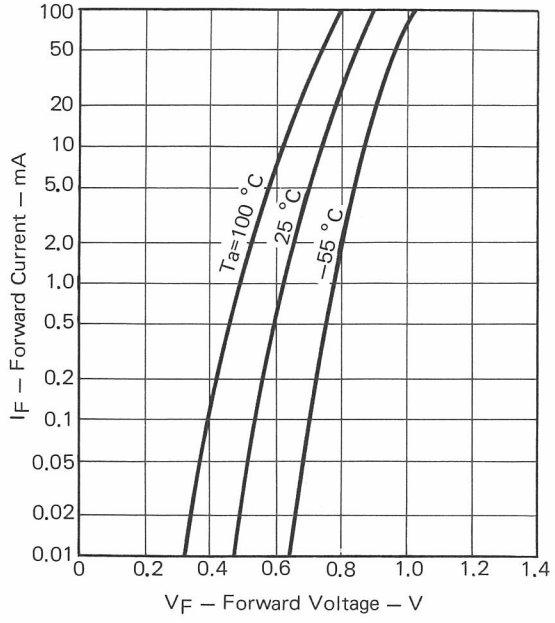


REVERSE CURRENT vs. REVERSE VOLTAGE

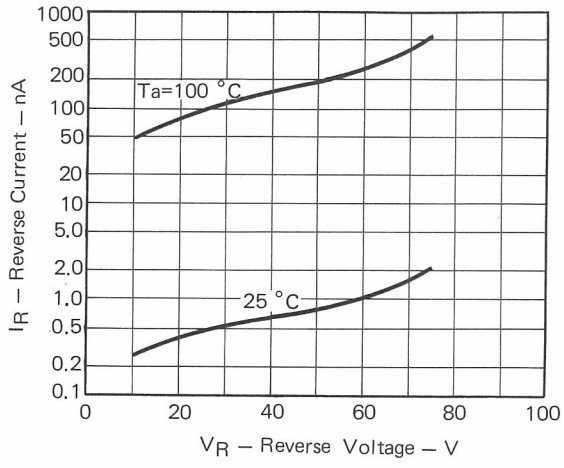


TERMINAL CAPACITANCE vs. REVERSE VOLTAGE

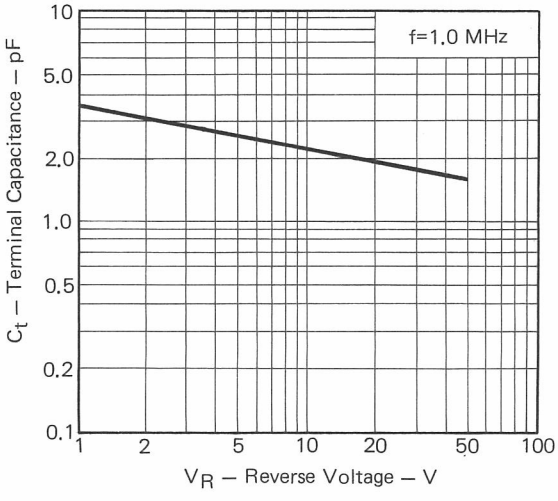



REVERSE RECOVERY TIME vs. FORWARD CURRENT

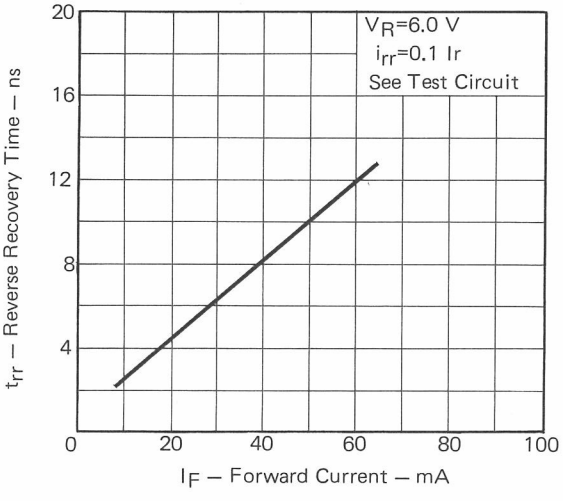

trr REVERSE RECOVERY TIME TEST CIRCUIT

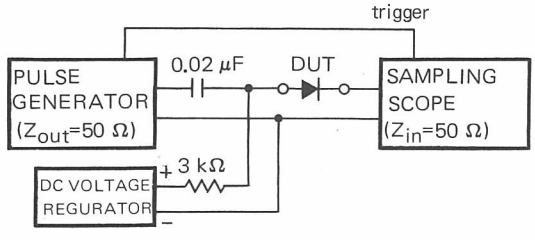





Test Conditions : I_F=10 mA, V_R=6 V, R_L=100 Ω, i_{rr}=0.1 Ir

Please note our new name,
NEC Corporation, starting April 1, 1983.

Nippon Electric Co.,Ltd.

NEC Building, 33-1, Shiba Gochome, Minato-ku, Tokyo 108, Japan
Tel.: Tokyo 454—1111
Telex Address: NECTOK J22686
Cable Address: MICROPHONE TOKYO

IC-1406
AUG.-20-81RK
Printed in Japan