


Typical performance

- ◆ Wide Input voltage range
- ◆ Typical Efficiency （75%）
- ◆ Switching frequency：60 KHz
- ◆ Over current/Short circuit protection,Self-furbish
- ◆ Input-output isolate
- ◆ PCB Board in-line type installs
- ◆ Metal case

Temperature graph

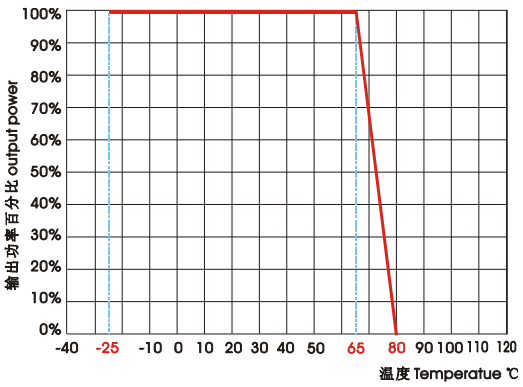

Technology parameter (Test condition : Unless otherwise indicated,specifications apply over all operating input voltage,resistive load,and temperature conditions)

Input	Min	Nom	Max	Notes
Vdc Input voltage	165(200Vdc)	220	265(380Vdc)	N
	85(120Vdc)	220	265(380Vdc)	W
Hz Frequency range	47		440	
Remote ON/OFF	Non			

Ouput			
Voltage accuracy		Vo1；Vo2	±1.0%，±2.0%
Line regulation	Nominal Load, full voltage range	Vo1；Vo2	±0.2%；±0.5%
Load regulation	20% ~ 100% rated voltage	Vo1；Vo2	±0.5%；±3.0%
Ripple and noise	20MHz BM (Full Load) （Note: Ripple of package 50.8*25.4*11.2mm is bigger than nominal value）		
	Vo≤5.0V, ≤80mVp-p	Vo≥48V, ≤180mVp-p	Other≤120 mVp-p
Turn-on delay time	Typical value		1S

General			
Efficiency	Nominal input，Full load	Vo≤5.0V,75%(Typical)	Vo>5.0V，77%(Typical)

Switching frequency		60KHz	
Operating temperature		Free air	-25℃ ~ +65℃
Storage temperature			-40℃ ~ +105℃
Max case temperature			+80℃
Relative humidity			10%~90%
case material			Metal case
Isolation Voltage	Input-output 2.5KV ≤10mA/1min		
Input- case Input-FG 1.5KV≤ 10mA/1min			
(MTBF)	$2X10^5$Hrs		

Product Nomination Method

Example	W A 3 – 220 S 05 I ① ② ③ ④ ⑤ ⑥ ⑦		
①	W Wide range voltage input: AC85-265V, N Narrow range voltage input: AC165-265V	⑤	S : Single output, D : Dual output, T : Triple output,
②	Power convert mode A (AC-DC)	⑥	Output voltage
③	Output Watt	⑦	I : Indicate dual output isolate
④	Input voltage		


Typical product tabulates


TYPE	Input voltage range	Output voltage / current					
		VO1		VO2		VO3	
		V	mA	V	mA	V	mA
WA3-220S2V1	85~265VAC 120~380VDC	2.1V	600mA				
WA3-220S3V3		3.3V	600mA				
WA3-220S05		5V	600mA				
WA3-220S06		6V	500mA				
WA3-220S09		9V	330mA				
WA3-220S12		12V	250mA				
WA3-220S15		15V	200mA				
WA3-220S18		18V	160mA				
WA3-220S24		24V	120mA				
WA3-220S48		48V	60mA				

WA3-220D3V3		+3.3V	300mA	-3.3V	300mA		
WA3-220D05		+5V	300mA	-5V	300mA		
WA3-220D06		+6V	250mA	-6V	250mA		
WA3-220D09		+9V	165mA	-9V	165mA		
WA3-220D12		+12V	125mA	-12V	125mA		
WA3-220D15		+15V	100 mA	-15V	100 mA		
WA3-220D24		+24V	60 mA	-25V	60 mA		
WA3-220D48	85~265VAC 120~380VDC	+48V	30 mA	-48V	30 mA		
WA3-220D05I		+5V	300 mA	-5V	300 mA		
WA3-220S5S12I		+5V	350 mA	+12V	100 mA		

Shows the nominal value of input voltage, due to space limitations ,the above list is only for some products, If demand for products out of above list, please contact the our sales department.

Mechanical Data

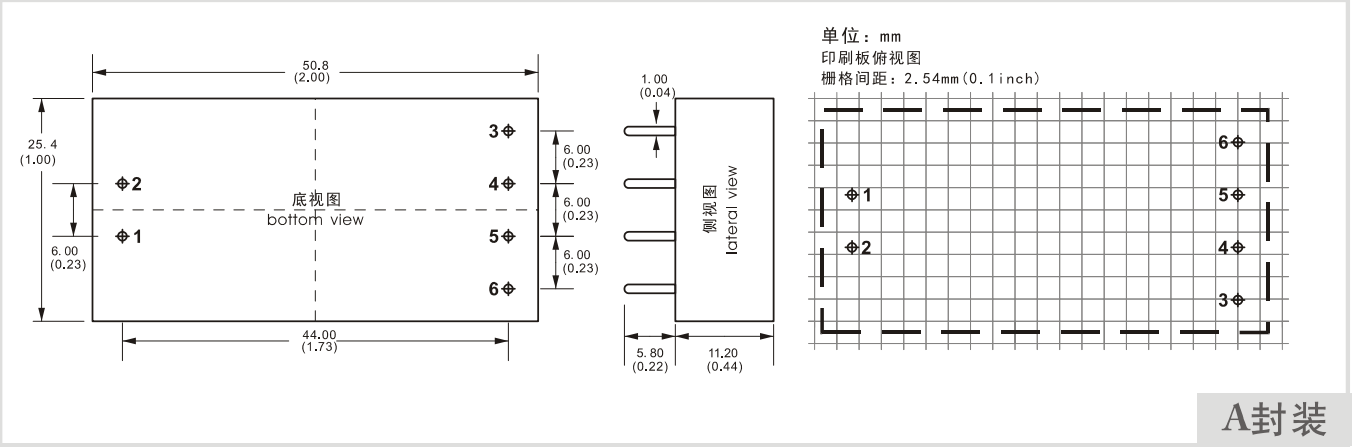

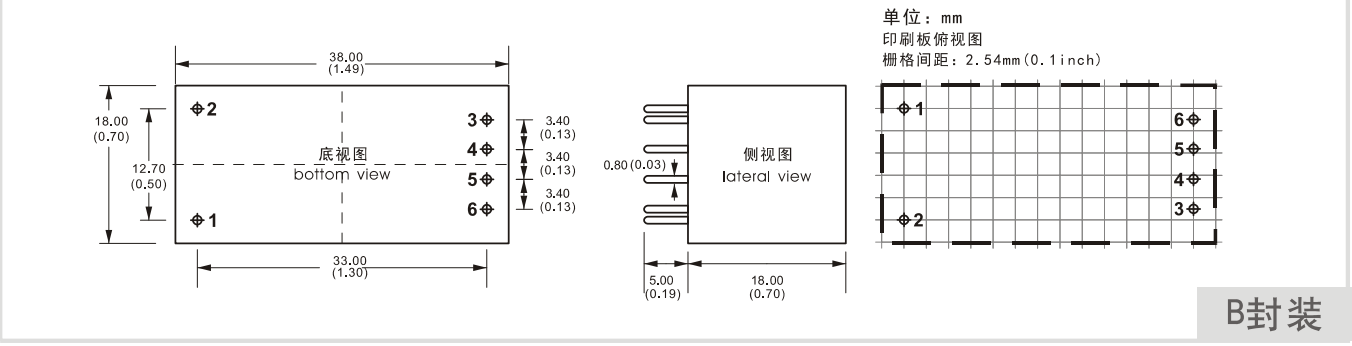

Mechanical Data

Package Code	L x W x H (unit)：mm	Package No
A	50.8 x 25.4 x 11.2	200100AC
B	38.0 x 18.0 x 18.0	150071AC

Pin Assignments

Pin No	1	2	3	4	5	6				
Single	AC(N)	AC(L)	+Vout	NP	NP	GND				

Dual	AC(N)	AC(L)	+Vo1	COM	COM	-Vo2				
Dual Isolate	AC(N)	AC(L)	+Vo1	GND1	+Vo2	GND2				

*Note：The power modules such as the definition of the pin does not match with the data sheet, please refer to the actual item.