
2,000 V - 10,000 V Rectifiers

0.5 A - 2.0 A Forward Current
70 ns Recovery Time

1N6513 1N6515
1N6517 1N6519

AXIAL LEADED
HERMETICALLY SEALED
MIL-PRF-19500/575



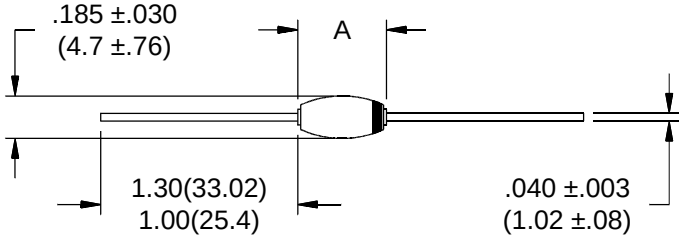
JANTX JANTXV

4

ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Working Reverse Voltage (Vrwm)	Average Rectified Current (Io)		Reverse Current @ Vrwm (Ir)		Forward Voltage (Vf)		1 Cycle Surge Current tp=8.3ms (Ifsm)	Repetitive Surge Current (Ifsm)	Reverse Recovery Time (3) (Trr)	Thermal Impedance θ_{J-L}			Junction Cap. @50VDC @ 1kHZ (Cj)
		55°C(1)	100°C(2)	25°C	100°C	25°C		25°C	25°C	25°C	L=000	L=.125	L=.250	25°C
	Volts	Amps	Amps	µA	µA	Volts	Amps	Amps	Amps	ns	°C/W	°C/W	°C/W	pF
1N6513	2000	2.00	1.50	1.0	25	3.5	2.0	100	15	70	3	6	12	25
1N6515	3000	1.50	1.00	1.0	25	6.0	1.5	60	10	70	3	6	12	20
1N6517	5000	1.00	0.50	1.0	25	8.0	1.0	40	8	70	3	6	12	16
1N6519	10000	0.50	0.25	1.0	25	13.0	0.5	25	5	70	3	6	12	8

(1)TL=55°C L=0.375" (2)TL=100°C L=0.375" (3)If=0.5A, Ir=1.0A, Irr=0.25A • Op.Temp.= -65°C to +175°C Stg.Temp.= -65°C to +200°C



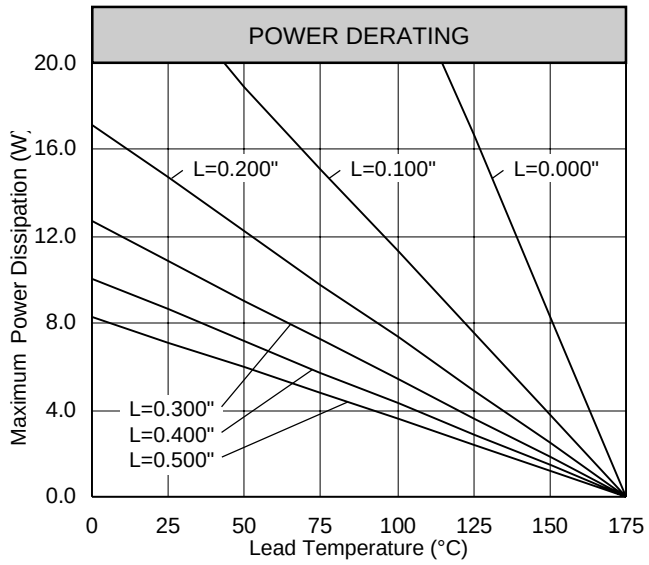
Part	A
1N6513	.310(7.82) MAX. .250(7.6) MIN.
1N6515	.330(8.38) MAX. .270(6.85) MIN.
1N6517	.350(8.89) MAX. .290(7.37) MIN.
1N6519	.400(10.16) MAX. .340(8.64) MIN.

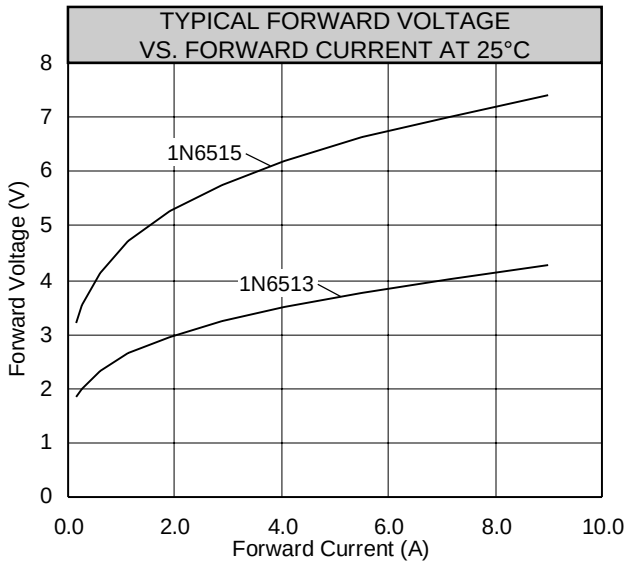


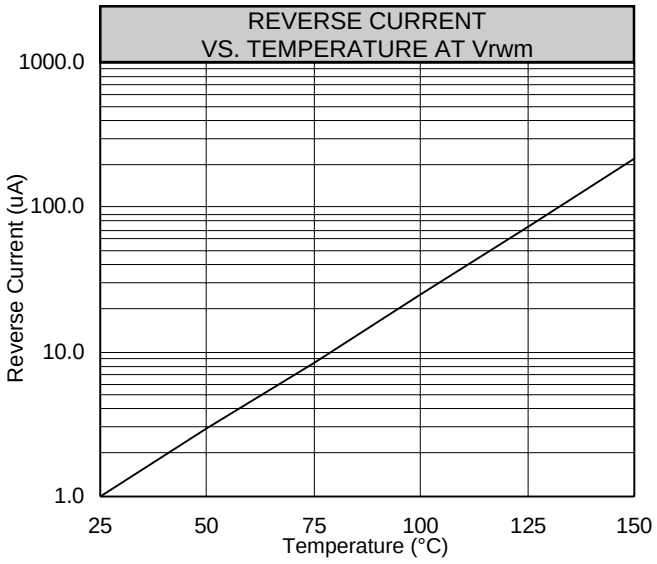
Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.

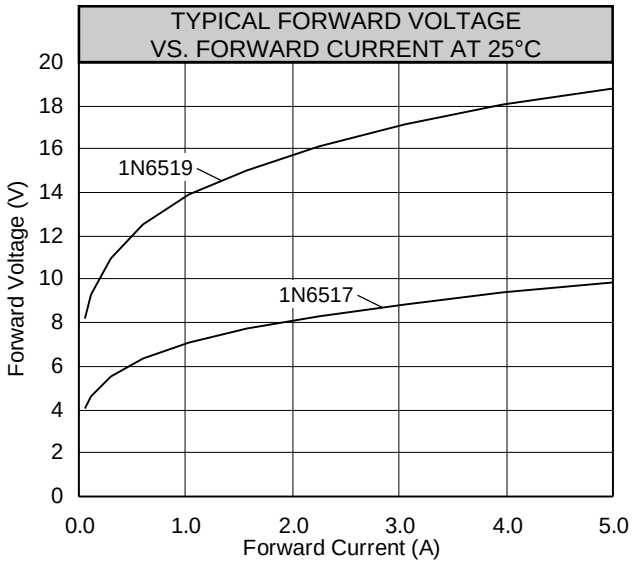
VOLTAGE MULTIPLIERS INC.
8711 W. Roosevelt Ave.
Visalia, CA 93291

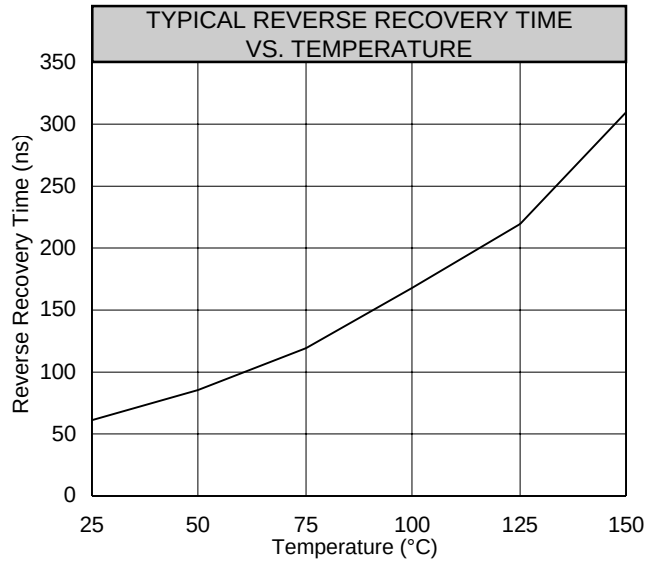
TEL 559-651-1402
FAX 559-651-0740
www.voltagemultipliers.com

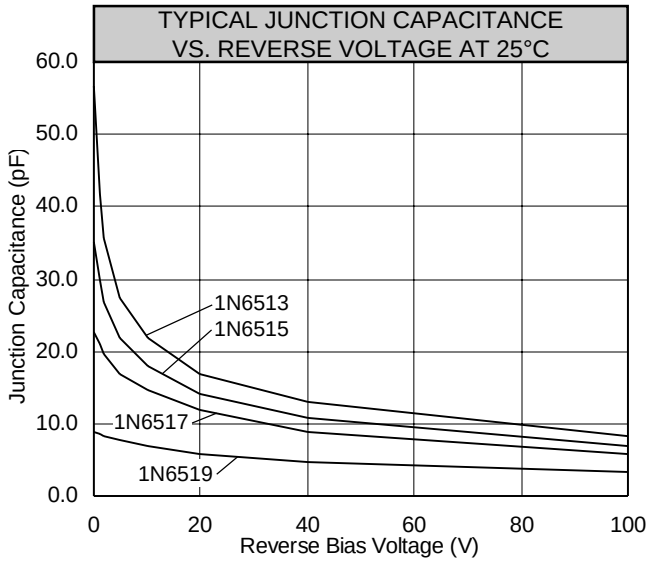

POWER DERATING
Maximum Power Dissipation (W)
20.0
16.0
12.0
8.0
4.0
0.0
L=0.200"
L=0.100"
L=0.000"
L=0.300"
L=0.400"
L=0.500"
0
25
50
75
100
125
150
175
Lead Temperature (°C)


TYPICAL FORWARD VOLTAGE
VS. FORWARD CURRENT AT 25°C
Forward Voltage (V)
8
7
6
5
4
3
2
1
0
1N6515
1N6513
0.0
2.0
4.0
6.0
8.0
10.0
Forward Current (A)


REVERSE CURRENT
VS. TEMPERATURE AT Vrwm
Reverse Current (uA)
1000.0
100.0
10.0
1.0
25
50
75
100
125
150
Temperature (°C)


TYPICAL FORWARD VOLTAGE
VS. FORWARD CURRENT AT 25°C
Forward Voltage (V)
20
18
16
14
12
10
8
6
4
2
0
1N6519
1N6517
0.0
1.0
2.0
3.0
4.0
5.0
Forward Current (A)


TYPICAL REVERSE RECOVERY TIME
VS. TEMPERATURE
Reverse Recovery Time (ns)
350
300
250
200
150
100
50
0
25
50
75
100
125
150
Temperature (°C)


TYPICAL JUNCTION CAPACITANCE
VS. REVERSE VOLTAGE AT 25°C
Junction Capacitance (pF)
60.0
50.0
40.0
30.0
20.0
10.0
0.0
1N6513
1N6515
1N6517
1N6519
0
20
40
60
80
100
Reverse Bias Voltage (V)

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.