# DIODE(THREE PHASES BRIDGE TYPE)


# DF60AA120/160


UL;E76102(M)

Power Diode Module **DF60AA** is designed for three phase full wave rectification, which has six diodes connected in a three phase bridge configuration. The mounting base of the module is electrically isolated from semiconductor elements for simple heatsink construction Output DC current is 60Amp (Tc=112℃) Repetitive peak reverse voltage is up to 1,600V.

- TjMax=150℃
- Isolated Mounting Base
- High reliability by unique glass passivation

(Applications)
AC. DC Motor Drive/AVR/Switching
—for three phase rectification



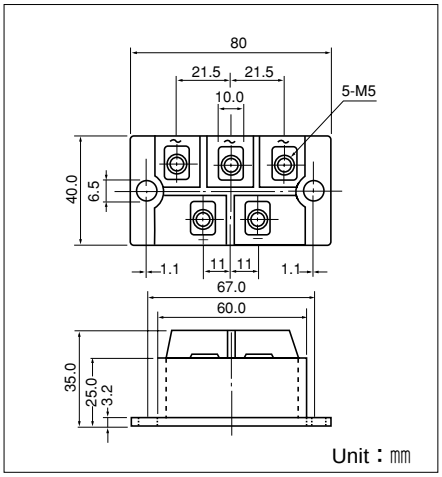
## ■Maximum Ratings

(Tj=25℃ unless otherwise specified)

| Symbol | Item | Ratings | | Unit |
|---|---|---|---|---|
| | | DF60AA120 | DF60AA160 | |
| VRRM | Repetitive Peak Reverse Voltage | 1200 | 1600 | V |
| VRSM | Non-Repetitive Peak Reverse Voltage | 1300 | 1700 | V |

| Symbol | Item | | Conditions | Ratings | Unit |
|---|---|---|---|---|---|
| ID | Output current(D.C.) | | Three phase. full wave. Tc=112℃ | 60 | A |
| IFSM | Surge Forward Current | | 1 cycle, 50/60Hz, peak value, non-repetitive | 910/1000 | A |
| Tj | Junction Temperature | | | −40 to +150 | ℃ |
| Tstg | Storage Temperature | | | −40 to +125 | ℃ |
| VISO | Isolation Breakdown Voltage (R.M.S.) | | Main Terminal to case 1minute | 2500 | V |
| | Mounting Torque | Mounting (M6) | Recommended Value 2.5-3.9 (25-40) | 4.7 (48) | N·m (kgf·cm) |
| | | Terminal (M5) | Recommended Value 1.5-2.5 (15-25) | 2.7 (28) | |
| | Mass | | Typical Value | 200 | g |


## ■Electrical Characteristics

| Symbol | Item | Conditions | Ratings | Unit |
|---|---|---|---|---|
| IRRM | Repetitive Peak Reverse Current, max. | Tj=150℃ at VRRM | 12.0 | mA |
| VFM | Forward Voltage Drop, max. | IFM=60A, Tj=25℃ Inst. measurement | 1.3 | V |
| Rth(j-c) | Thermal Impedance, max. | Junction to case | 0.24 | ℃/W |



SanRex®

50 Seaview Blvd. Port Washington, NY 11050-4618 PH.(516)625-1313 FAX(516)625-8845 E-mail: semi@sanrex.com


Forward Voltage Drop max.

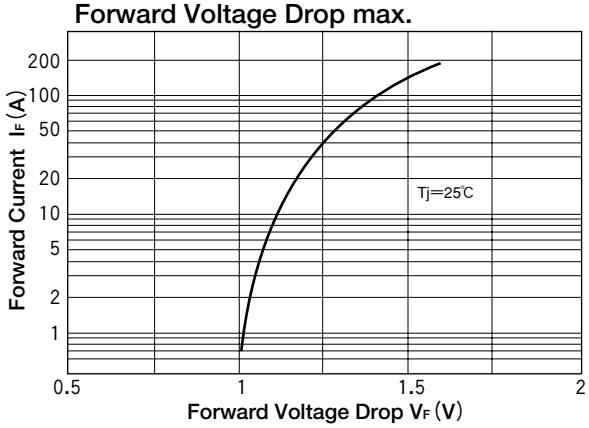



Output Current vs.Power Dissipation, max. (Three phase, full wave)

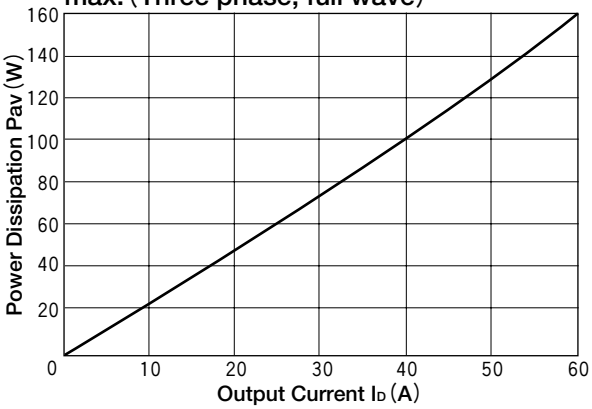



Output Current vs. Allowable case Temp

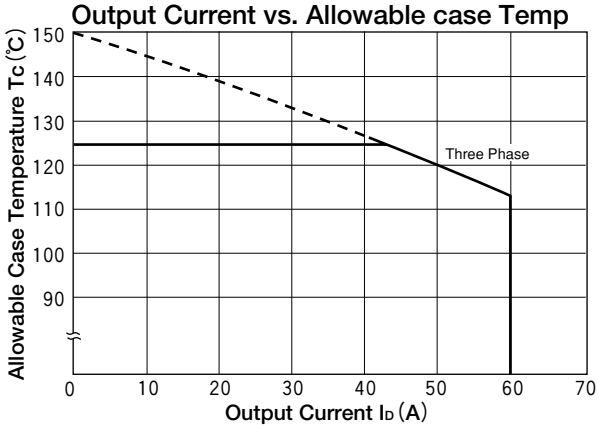


Cycle Surge Forward Current Rating (Non-Repetitive)

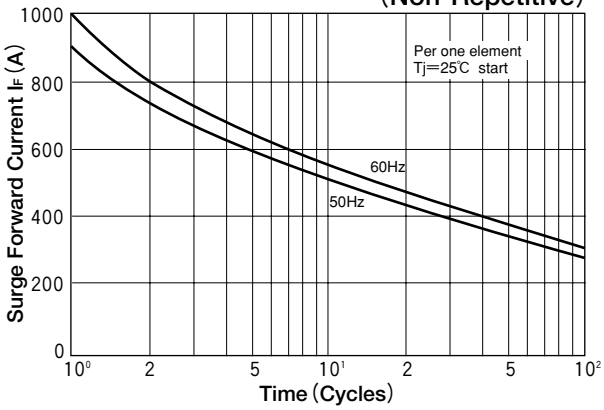


Transient Thermal Impedance (max)

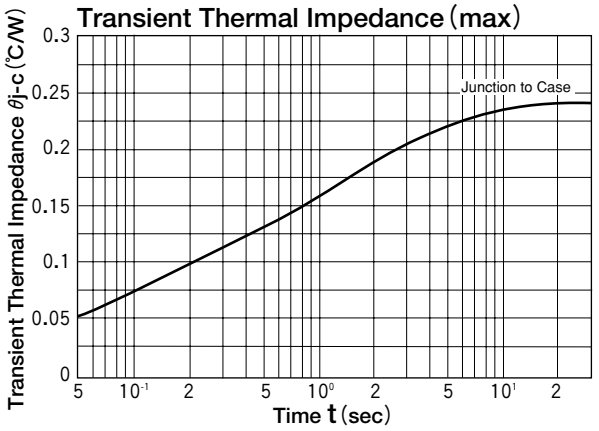




50 Seaview Blvd. Port Washington, NY 11050-4618 PH.(516)625-1313 FAX(516)625-8845 E-mail: semi@sanrex.com

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.