
Automatic Drop-Down Seal - Assa Abloy Planet X3 RD

Model	Assa Abloy Planet X3 RD (smoke-shielding), can be shortened
Performance	52 dB sound reduction; smoke-shielding (RD)
Profile	Aluminium 22 × 30 mm; seal height 5–12 mm; side lift 2–6 mm
Material	Aluminium & silicone
Finish	Natural finish
FF&E; ref	FIX-09 · Zone: Entrance · Qty 1



Overview of Advantages

- Drop-down seal for exterior doors made of wood, metal or PVC
- Driving rain proof (9A, ift certified), no drainage channel required
- X3: 3 sealing movements simultaneously: downwards, to the left and to the right, individually adjustable
- Drop height 5 – 12 mm, side lift 2 – 6 mm, easily adjustable
- Sound absorption level up to 52 dB with optimal sealing
- High quality silicone lip
- Minimum door thickness 68 mm
- Can be shortened to the next smaller stock length with Planet X3 shortening set
- 7-year warranty

Incl. accessories

Planet assembly set X3 for wooden doors with 2 mounting brackets (stainless steel), 4 screws, version Planet X3 shortenable: incl. Planet shortening set X3 with quick clamping system

Tender specification


Automatic door drop-down seal Planet X3 RD | 52 dB, against driving rain (9A, ift certified) for sound and smoke-shielding protection doors, release on one side on the hinge side, 3 sealing movements: Seal can be adjusted to the left, downwards and to the right, seal height 5 – 12 mm, side lift adjustment 2 – 6 mm, flush or 2 mm deeper with lip protection for grooving. Silicone lip, side attachment. Profile made of aluminium 22 x 30 mm.

Technical data

Groove size	22.5 mm wide and 30 to 32 mm deep
Seal profile	high-quality silicone
Sound absorption value	up to 52 dB at ground air 7 mm
Frame protector plate	Planet corner plate set X3 recommended (optional)
Fastening	with stainless steel mounting brackets and screws on the side
Can be shortened	max. 125 mm
Release	on one side, hinge side
Drop height adjustment	on the release pin with 3 mm Allen key, side lift adjustment (2 – 6 mm) on the front side with 4 mm Allen key
Max. drop height	5 – 12 mm
Profile size	22 x 30 mm
Profile material	Aluminium
Special features	Driving rain proof 9A, 600 Pa, classification according to DIN EN 12208 Test method according to DIN EN 1027

Variants that can be ordered

Order number	Version	Length	can be shortened to	Version	Order placement information
206084	X3	835 mm	>710 mm	Can be shortened	seal must be assembled!
206096	X3	960 mm	>835 mm	Can be shortened	seal must be assembled!
206109	X3	1085 mm	>960 mm	Can be shortened	seal must be assembled!
206121	X3	1210 mm	>1085 mm	Can be shortened	seal must be assembled!
206134	X3	1335 mm	>1210 mm	Can be shortened	seal must be assembled!
206146	X3	1460 mm	>1335 mm	Can be shortened	seal must be assembled!
209084	X3	710 - 835 mm		made to measure	ready for installation (cannot be shortened)
209096	X3	835 - 960 mm		made to measure	ready for installation (cannot be shortened)
209109	X3	961 - 1085 mm		made to measure	ready for installation (cannot be shortened)

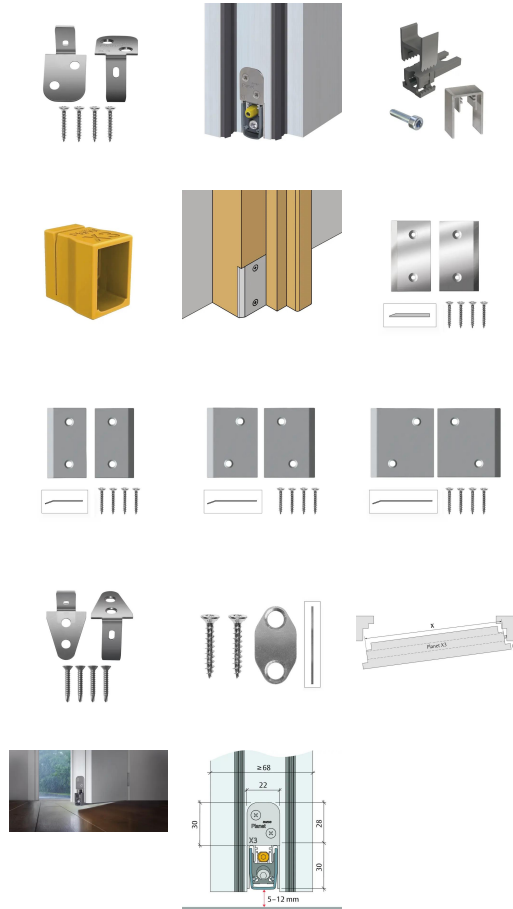

Features / versions (depending on options)



Floor surfaces



Possible door types (depending on options)



Planet X3
22 x 30 mm | ↓5–12 mm | ███2–6 mm | 9A | 52 dB



shortened)

Planet X3 22 x 30 mm ↓5–12 mm ███2–6 mm 9A 52 dB				
Planet ASSA ABLOY				
209121	X3	1086 - 1210 mm	made to measure	ready for installation (cannot be shortened)
209134	X3	1211 - 1335 mm	made to measure	ready for installation (cannot be shortened)
209146	X3	1336 - 1460 mm	made to measure	ready for installation (cannot be shortened)