
Load Center, Meter Socket PAMS3022TRNUS

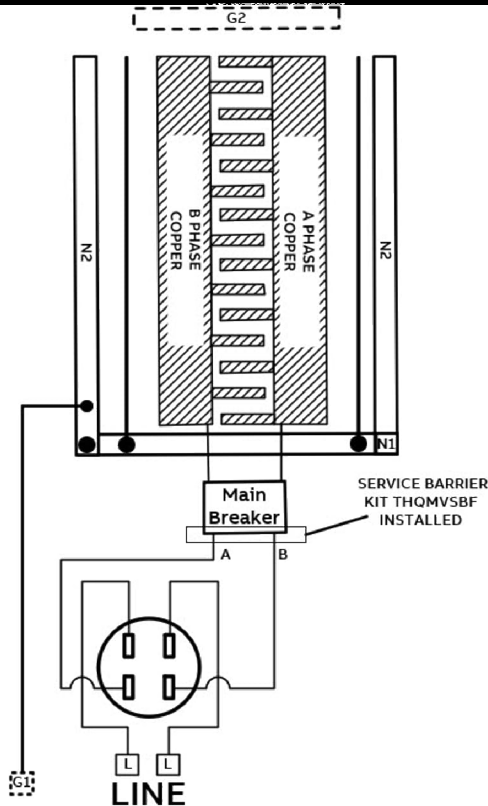
Catalog No.	PAMS3022TRNUS
Enclosure	Outdoor Type 3R, Surface
Rating	225 A main breaker, 1-ph 3-W, 120/240
Spaces / circuits	30 / 60
Interrupt	22 kAIC, fully rated
Main wire	1-300 Cu-Al
Dimensions	53.05 x 14.93 x 5.81 in
Modification	ReliaHome 32-hole equipment ground bar - TGK32

Substitution / Deviation - engineer confirmation required

Offered with aluminum bus and a 225A main in place of the specified copper bus / 175A main - ABB's meter combo is not offered in that combination. Requires engineer confirmation.

ABB**ReliaHome™****Meter Combo**

ENCLOSED
PANELBOARD
ISSUE NO. C-3024

**SUITABLE ONLY FOR USE AS SERVICE EQUIPMENT.**

MAXIMUM CONTINUOUS LOAD ON BRANCH CIRCUIT NOT TO
EXCEED 80 PERCENT OF THEIR RATING.

ADDITIONAL/REPLACEMENT DEVICE SHALL BE OF SAME
DESIGNATION AND OF EQUAL OR GREATER
INTERRUPTING RATING

100 AMPS MAX BRANCH BREAKER
200 AMPS MAXIMUM STAB RATING

FOR ADDITIONAL SERIES RATING INFORMATION REFER TO
DET008

BUILDING PAPER OR FLASHING IS TO BE OVER THE FRONT
OF FLANGE WHEN SEMI-FLUSH DEVICE IS INSTALLED

THIS DEVICE MEETS E.U.S.E.R.C. SPECIFICATIONS

**DANGER**

HAZARD OF ELECTRICAL SHOCK OR BURN.
TURN OFF POWER BEFORE WORKING INSIDE
THIS EQUIPMENT.

RAINPROOF CONDUIT HUBS

WHEN CABINET HAS PROVISIONS FOR A CONDUIT HUB, SELECT FROM THE CHART BELOW.

DIAMETER (INCHES)	3/4	1	1 1/4	1 1/2	2	2 1/2	3	CAP	11/2	2
RAINTIGHT CAT.NO.	TC75	TC100	TC125	TC150	TC200	TC250	TC300	TCCP	TCCP15	TCCP20

THE SHORT CIRCUIT RATING OF THIS PANELBOARD IS EQUAL TO 22,000
RMS SYMMETRICAL AMPERES AT 240 V, SINGLE PHASE. WATT-HOUR
METER NOT INCLUDED IN SHORT-CIRCUIT RATING.

METER COMBO
CAT NO. SURFACE TYPE : PAMS3022TRNUS MOD 1

225 AMPS MAX. 120/240V AC

3 WIRES, 1 PHASE

TYPE 3R ENCLOSURE

METER SOCKET RATING: 225 AMPS (200 AMPS CONTINUOUS)

MAIN BREAKER: THQMV225FB

USE ONLY ABB TYPE BREAKERS :

THQL, THHQL, THQLT, THQLQ

OVER CURRENT PROTECTION

IF BREAKER TRIPS, HANDLE WILL BE IN INTERMEDIATE
POSITION. TO RESTORE SERVICE;

1. MOVE HANDLE TO "OFF" POSITION

2. THEN TO "ON" POSITION

USE COPPER OR ALUMINIUM

USE 60 °C OR 75 °C AMPACITY SIZED WIRE ON LINE
NEUTRAL TERMINALS. SEE CIRCUIT BREAKERS FOR THEIR
TEMPERATURE RATING.

WIRE RANGE TABLE

CONNECTOR	COPPER		ALUMINIUM	
	SOLID	STRD	SOLID	STRD
NEUTRAL – N1	-	1 – 300	-	1 – 300
NEUTRAL – N2	14 – 10	14 – 4	12 – 10	12 – 4
LINE – L	-	1 – 300	-	2/0 – 300
GROUND – G1	-	1 – 300	-	1 – 300
GROUND – G2	14 – 10	14 – 4	12 – 10	12 – 4

LUG TIGHTENING TORQUE (LB-IN)

SLOTTED SCREW		INTERNAL HEX SCREW	
AWG	TORQUE	HEX	TORQUE
WIRE	(LB-IN)	SIZE	(LB-IN)
14 - 10	32 - 35	3/16 ACROSS FLATS	108 -120
8	36 - 40	1/4 ACROSS FLATS	180-200
6 - 4	41 - 45	5/16 ACROSS FLATS	248-275
3 - 2/0	45 - 50	-----	-----

ACCESSORIES

EQUIPMENT GROUND KITS	TGK32, TGK42
FRONT FILLER PLATES	1" WIDTH - TQLFP1

WARNING: TO AVOID ACCIDENTAL CONTACT WITH LIVE
PARTS, CLOSE ALL OPENINGS WITH BREAKERS OR FILLER
PLATES. THE CIRCUIT BREAKERS IN THIS BOX HAVE BEEN
SELECTED TO PROTECT THE WIRING TO AVOID DAMAGE
AND LOSS OF PROTECTION, DO NOT REPLACE WITH
HIGHER AMPERE RATED BREAKERS. FOR REPAIRS OR
ALTERATIONS, CALL AN ELECTRICAL CONTRACTOR OR
ELECTRICIAN.

BUSHING PLATE

INSTRUCTION SHEET
1TQC183000Z2401



ABB INC., GREGSON DRIVE,
CARY, INC, U.S.A
SALXXXX@
COUNTRY OF ORIGIN : MEXICO
10096008P37 REV. A



Catalog No. **TKG32**

Description: RH 32-HOLE GROUND

UPC No 783164158489

Home > Load Center & Meter Combos > Accessories/Parts

The **TKG32** is a 32 hole ground bar kit. For 6-12 circuit indoor load centers, utilize PowerMark Plus style neutrals and grounds. Add the TKGIS for an isolated ground and mount to ground kit.

Descriptors	
Category	Accessories/Parts
GO Schedule	RA
Grouping	Accessories/Parts