

Recirculation Pump - Taco **2400 Series** High-Capacity Circulator

Model	Taco 2400 Series high-capacity circulator (select by duty)
Max flow / head	90 GPM / 46 ft
Fluid temp	40 to 225 F
Max working pressure	150 psi
Body	Cast iron or stainless steel
Electrical	115 V, 1-phase, 60 Hz; 1/6 to 1/2 HP by model
Motor	Open drip-proof, PSC, thermally protected (indoor use)

Notes

Select the specific 2400 model to match the recirculation flow / head.



2400 Series High Capacity Circulators

Submittal

JOB DETAILS


JOB: _____

REPRESENTATIVE: _____


ENGINEER: _____

CONTRACTOR: _____


MODELS 2400-10-3P THRU 2400-50S/2-3P

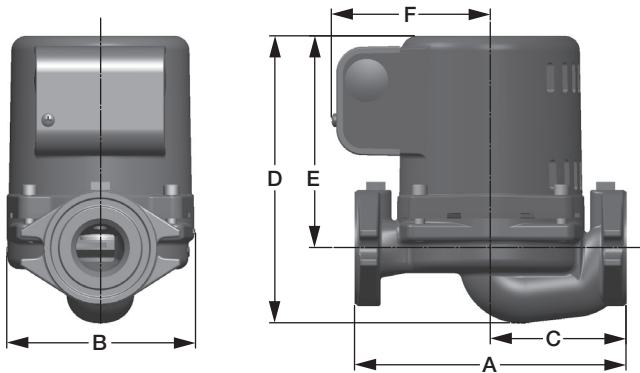

MODELS 2400-60-3P THRU 2400-70S-3P

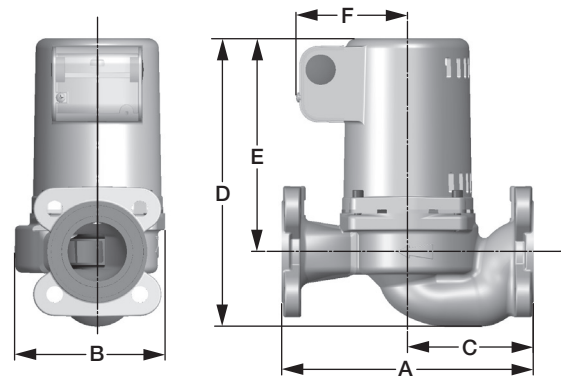

MODELS 2400-70/3-3P AND 2400-70S/3-3P

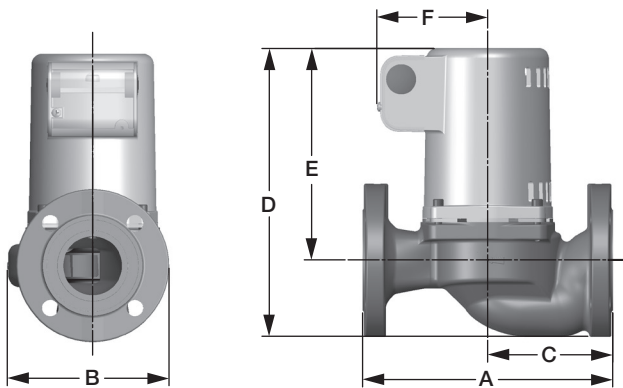

PUMP DIMENSIONS & WEIGHTS

All dimensions and weights are approximate.

CAST IRON MODEL	STAINLESS STEEL MODEL	A		B		C		D		E		F		SHIP WEIGHT	
		IN.	MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM	IN.	MM	LBS.	KG
2400-10-3P	2400-10S-3P	6 3/8	162	4 1/2	114	3 3/16	82	6 7/8	175	5	127	3 3/4	95	11.5	5.3
2400-20-3P	2400-20S-3P	6 3/8	162	4 1/2	114	3 3/16	82	6 7/8	175	5	127	3 3/4	95	12.0	5.5
2400-30-3P	2400-30S-3P	8 1/2	216	4 3/4	121	4 1/4	108	8	203	5 1/4	133	3 3/4	95	14.5	6.6
2400-40-3P	2400-40S-3P	8 1/2	216	4 3/4	121	4 1/4	108	8	203	5 1/4	133	3 3/4	95	14.5	6.6
2400-45-3P	2400-45S-3P	6 3/8	162	4 5/8	119	3 3/16	82	8 3/4	222	6 7/8	175	3 3/4	95	15.0	6.8
2400-50-3P	2400-50S-3P	6 3/8	162	4 5/8	119	3 3/16	82	8 3/4	222	6 7/8	175	3 3/4	95	16.0	7.3
2400-50/2-3P	2400-50S/2-3P	6 3/8	162	5 1/4	133	3 3/16	82	8 3/4	222	6 7/8	175	3 3/4	95	16.5	7.5
2400-60-3P	2400-60S-3P	8 1/2	216	5 3/16	132	4 1/4	108	7 7/8	200	5 1/4	133	3 3/4	95	18.0	8.2
2400-65-3P	2400-65S-3P	8 1/2	216	5 1/2	140	4 1/4	108	9 7/8	251	7 1/4	184	3 3/4	95	22.0	10.0
2400-70-3P	2400-70S-3P	8 1/2	216	5 1/2	140	4 1/4	108	9 7/8	251	7 1/4	184	3 3/4	95	23.0	10.4
2400-70/3-3P	2400-70S/3-3P	8 1/2	216	6 5/8	168	4 1/4	108	10 1/2	267	7 1/4	184	3 3/4	95	29.0	13.2



Submittal

MATERIALS OF CONSTRUCTION

Casing: Cast Iron or Stainless Steel

Seal Face Plate: Stainless Steel

Motor Housing: Aluminum

Impeller: 30% Glass-filled Noryl® *

Impeller Insert: Stainless Steel

Shaft: Stainless Steel

Mechanical Seal: Carbon/Silicon-Carbide

Motor Bearings: Permanently lubricated ball bearing

O-Ring/Flange Gaskets: EPDM

*Noryl is a registered trademark of General Electric Co.

PERFORMANCE DATA

Maximum Flow: 90 GPM

Maximum Head: 46 Feet

Minimum Fluid Temp: 40 °F (4 °C)

Maximum Fluid Temp: 225 °F (107 °C)

Maximum Working Pressure: 150psi


ELECTRICAL DATA

MODEL NUMBER	Hz	Ph	AMPS	RPM	HP
			115 V		
2400-10-3P	60	1	1.9	3450	⅙
2400-20-3P			1.9		⅙
2400-30-3P			1.9		⅙
2400-40-3P			1.9		⅙
2400-45-3P			3.6		⅓
2400-50-3P			4.9		½
2400-60-3P			1.9		⅙
2400-65-3P			3.6		⅓
2400-70-3P			4.9		½
Motor Type	Open drip proof, permanent split capacitor, thermally protected				

MODEL NOMENCLATURE

S – Stainless Steel, Flanged

MOUNTING POSITIONS

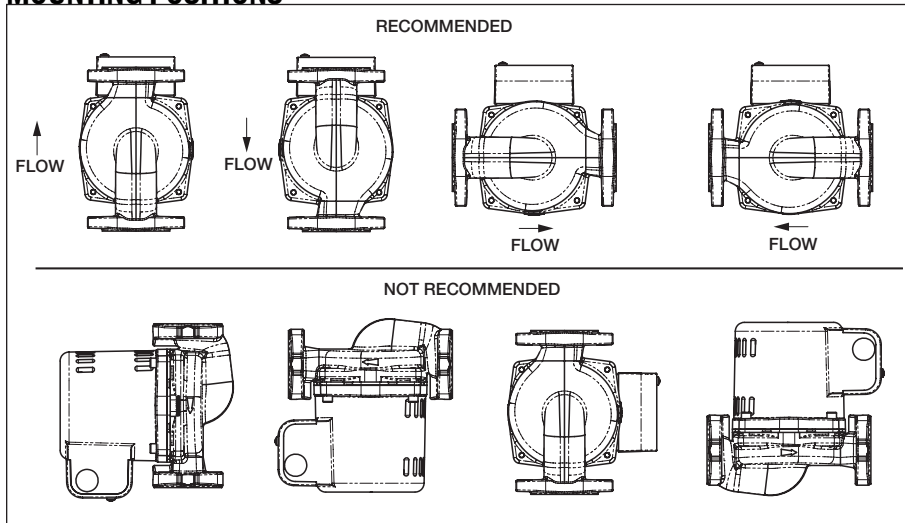

FOR INDOOR USE ONLY



STAINLESS STEEL
MODELS ONLY

2400 SERIES COMPANION FLANGE SETS

MODELS	CONNECTION	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
2400-10/10S-3P 2400-20/20S-3P 2400-45/45S-3P 2400-50/50S-3P 2 bolt	Iron NPT	110-251F	110-252F	110-253F	110-254F	-	-	-
	S. Steel NPT	110-251SF	110-252SF	110-253SF	110-254SF	-	-	-
	Bronze SWT	110-523BSFL	110-524BSFL	110-525BSFL	110-526BSFL	-	-	-
	Shut-Off NPT	SFL-075T	SFL-100T	SFL-125T	SFL-150T	-	-	-
	Shut-Off SWT	SFL-075TS	SFL-100TS	SFL-125S	SFL-150S	-	-	-
	Shut-Off Press	SFL-075P	SFL-100P	SFL-125P	SFL-150P	-	-	-
2400-50/50S/2-3P 2", 2 bolt	Iron NPT	-	-	-	-	194-2124F	-	-
	S. Steel NPT	-	-	-	-	194-2124SF	-	-
2400-30/30S-3P 2400-40/40S-3P 2 bolt	Iron NPT	-	-	194-1540F	194-1542F	-	-	-
	S. Steel NPT	-	-	194-1540SF	194-1542SF	-	-	-
	Shut-Off NPT	-	-	SFL-125T-0012	SFL-150T-0012	-	-	-
	Shut-Off SWT	-	-	SFL-125S-0012	SFL-150S-0012	-	-	-
2400-60/60S-3P 2400-65/65S-3P 2400-70/70S-3P 4 bolt	Iron NPT	-	-	-	-	185-086C	-	-
	Bronze NPT	-	-	-	-	185-086B	-	-
2400-70/70S/3-3P 3", 4 bolt	Iron NPT	-	-	-	-	-	185-112C	185-113C
	Bronze NPT	-	-	-	-	-	185-112B	185-113B