


Filling level indication ltr./US.liq.gal

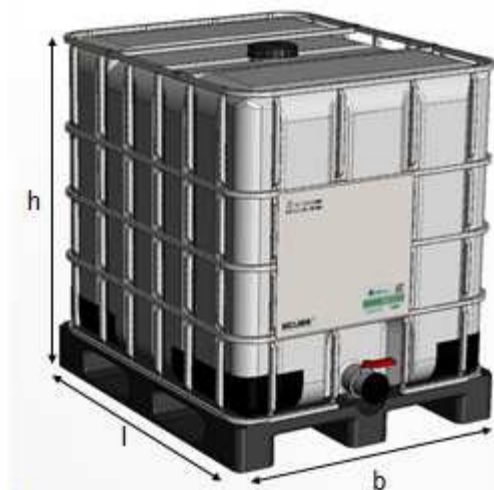

**Greif code**

**WulfKugelDN150**

**customer**

Neukunde/New customer

**customer article #**

**External dimensions targets (mm):**

length (l)	width (b)	height (h)
1200	1000	1171

**Weight (kg)** 56 +/- 3 %

**brimful volume (ca ltr.)** 1060

**Food contact conformity** ☐

n.a.

**Eligible for Zone area** 2 (IEC TS 60079-32-1)

**Materials and Structural Equipment**

**Cage** tubular steel 18x18mm, galvanized, welded

**Pallet** plastic skid pallet, injection molded

4 corner protectors, PE-HD, black

**Inner receptacle** blowmolded

**Resin** HDPE UV stab.

**Weight** 14,5+0,5 kg

**Color** nature colored

**Openings and closures**

**Top closure** Screw cap from PE-HD black DN150 for automatic filling ☐

**Cap gasket** sponge rubber (EPDM) venting ☒ Gore D38

**2" closure** ☒ 56x4

**Plug washer** EPDM

**Torques** cap/plug ca

**Discharge Opening** DN50

**Valve** ball valve, PE-HD black, complete

**color handle** black

**Flange gasket** FKM

**Flap seal** FKM

**connection** S60x6

**outlet nozzle** ☒

**UN approval**

UN31HA1/Y/./NL/TCPI-GEF5/FPD2-150582/4066/2023

max. stacking load (kg): resting 4066

Transport 2258

**stickers** Earthminded Collection

All components with product contact are free of recycled polymers.

**Remarks**

**Label plates**

Front 470x770

Left

Right

Back 470x530

**Date of creation**

14.08.2019

**Status** DRAFT