


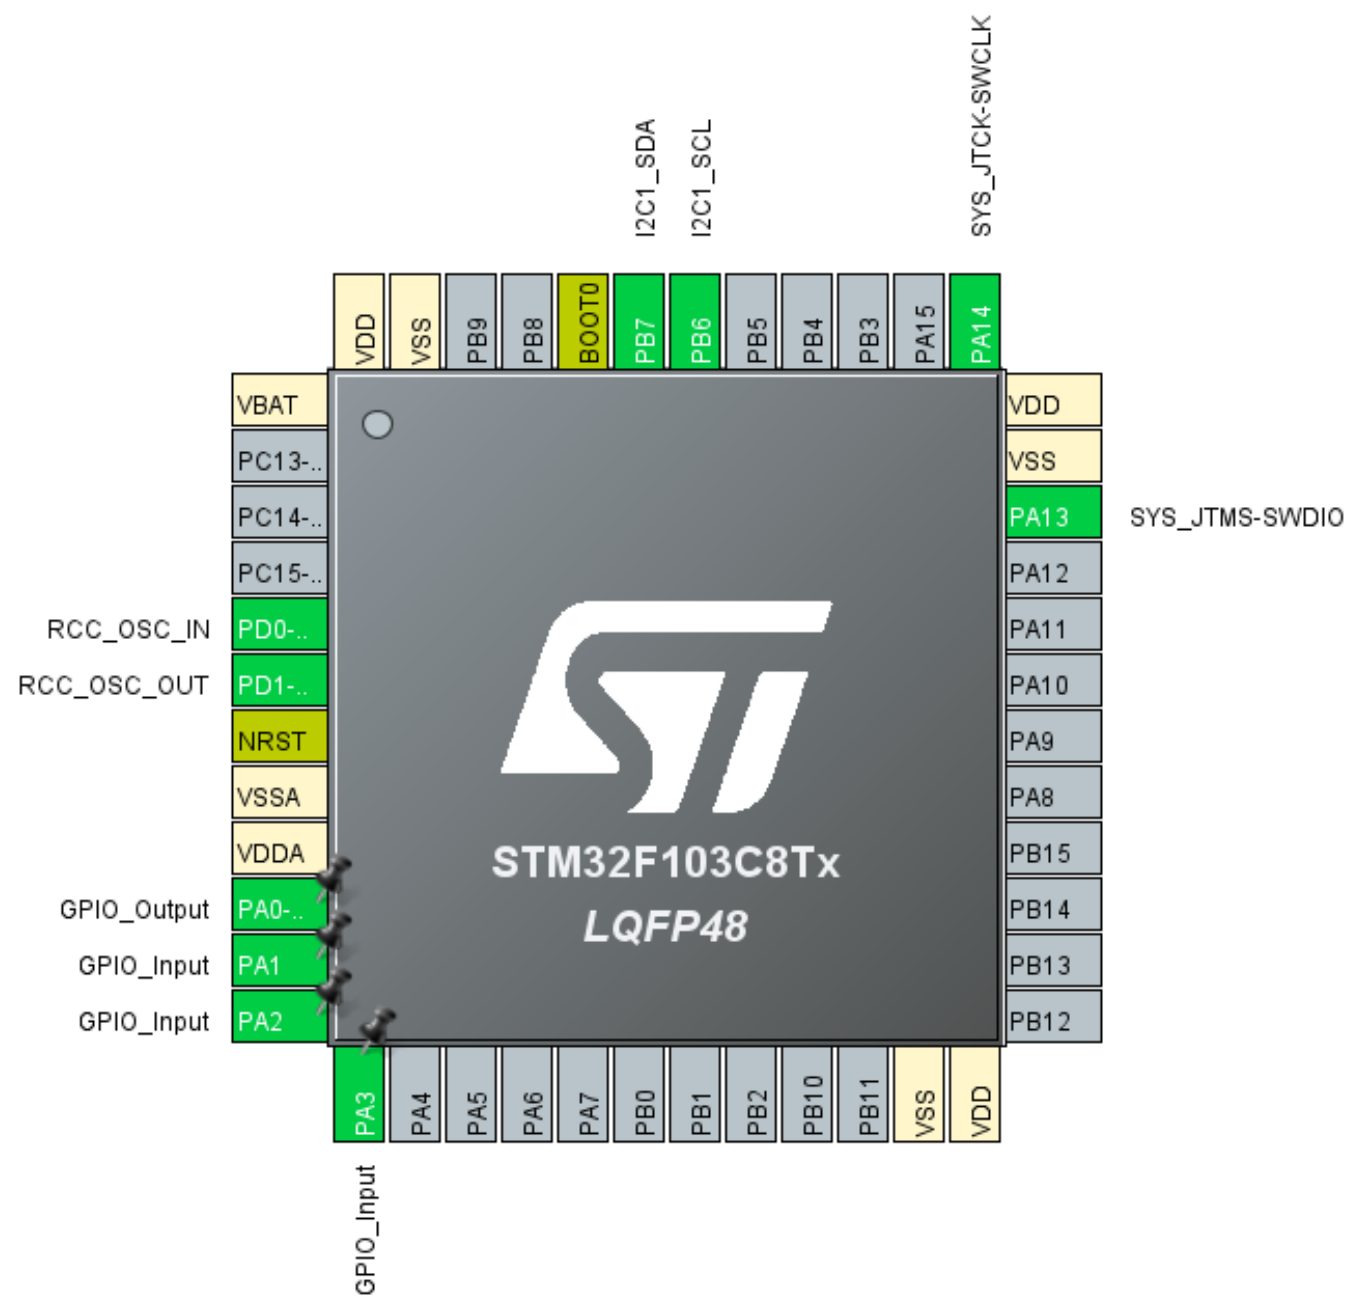

Mode

High Speed Clock (HSE) Crystal/Ceramic ...

Low Speed Clock (LSE) Disable

☐ Master Clock Output

SYS Mode and Configuration

Mode

Debug Serial Wire

I2C1 Mode and Configuration

Mode

I2C I2C

✓ NVIC Settings

✓ DMA Settings

✓ Parameter Settings

✓ User Constants

Configure the below parameters :

Search (Ctrl+F)

Counter Settings

Prescaler (PSC ... 7199

Counter Mode Up

Counter Period (... 4999

Internal Clock Div.. No Division

auto-reload prelo.. Disable

Trigger Output (TRGO...

Master/Slave Mo.. Disable (Trigger input effe..

Trigger Event Se.. Reset (UG bit from TIMx_...

Parameter Settings	User Constants	
NVIC Interrupt Table	Enabled	Preemption
TIM3 global interrupt	☒	0