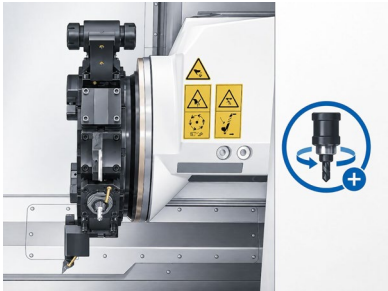
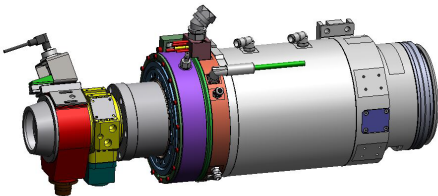



August 31, 2026
 REF: QR-MT-3864D


Attn: Manager Procurement
 Islamabad.

QUOTATION FOR HIGH ACCURACY CNC LATHE PD300
Option # 1

ITEM DESCRIPTION	UNIT PRICE FOB GERMANY (Euro)
<u>HIGH ACCURACY CNC LATHE MACHINE</u> Make: SPINNER Model: PD300-36MC Origin: Germany WITH ALL STANDARD ACCESSORIES & FEATURES PD300 with travel X=180mm Z=450mm in 45 degree inclined bed design with hardened and ground sliding guides in SUPER-PRECISION version PD with selected components with increased accuracy for fine and hard machining 	€ 289,000/-
equipped as a SINGLE-SPINDLE LATHE with turret WITH powered tools in version XXX-MC	
INDEXING TURRET - WITH driven tool stations all tool stations can be driven on the inner circle of turret disk. If one circle all positions can be with live tools only the station in working position is driven designed as servo turret Swivel speed as adjustable CNC axis with feed potentiometer 	
Tool holder on BMT45 turret system for particularly high change accuracy and rigidity	
Number of tool stations in the turret: 12	
AIR/WATER switching for turret incl. additional pneumatic valve to cool with compressed air instead of cooling lubricant	
SPINDLE 1 in version up to 7,000 rpm As integrated motor spindle in synchronous technology, with liquid cooling with solid shaft measuring systems mounted directly on spindle shaft for C-axis operation with hydraulic hollow clamping cylinder, bar passage 36mm, Speed range 0-7,000 rpm, 10.5 KW / 64Nm (40%), Spindle nose as flat flange DIN55026-A5 	

CNC CLAMPING FORCE SETTING on spindle 1 for convenient setting of the clamping force from the CNC program or on the screen	
FOOT SWITCH for opening and closing the clamping device of SPINDLE 1 in loading mode	
CNC-REITSTOCK with integrated bearing can be moved as CNC axis in axis to the main spindle. Programmable contact pressure.	
FOOTSWITCH for moving the tailstock quill in loading mode on machines with quill stroke or moving the CNC axis of CNC tailstocks or CNC counter spindles that are used as tailstocks for insert parts.	
HARD TURNING PACKAGE includes the following options: High-precision glass scale Heidenhain for the X-axis High-precision glass scale Heidenhain for Z-axis Direct measuring system in the spindle via non-contact inductive hollow shaft encoder for high-precision repositioning of the C-axis Increased rigidity of the spindle bearings by choosing bearings with stronger preload 	
Version with FANUC controlwith the following features: FANUC 32iTB CONTROL SYSTEM with the following basic functions:- Contouring control with Fanuc standard user interface- 15" LCD flat panel screen Fanuc control panel, full-key- User memory 256 KByte, max. 64 program numbers- USB interface for loading/saving CNC programs- Ethernet interface- GE Fanuc "turning" cycles for threading, deep drilling, machining, grooving,- Contour train programming, cutting radius compensation, chamfering and corner rounding- Zero offsets G54-59, 64 tool compensation pairs, V-constant- Thread cutting without compensation chuck for central threads in spindle centre and for driven tools.- In case of C-axis: Polar coordinates and cylinder interpolation- Parallel programming in the background- Dialogue interface for simple cycle assignment and contour programming incline graphs- Inch-Metric switching- Electronic handwheel integrated in control panel- Trilingual German/English/French dialogue language for control system. 	

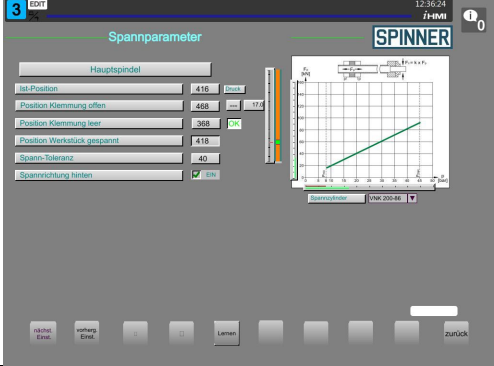CNC dialogue PRIMARY LANGUAGE: English	
Controller delivery status in METRIC programming	
Fanuc Manual-Guide i DIALOGUE PROGRAMMING	
Spinner option "Analog clamping parameters" Dialog mask on control to enter the monitored clamping position. No more adjustment of final switches on the clamping cylinder of the lathe No opening of sheet metal cladding is required. For quick conversion to other clamping tools and clamping positions with optimal safety monitoring Analog sensor LPS on SMW clamping cylinder For main and counter spindle, if subspindle installed Standard of Spinner lathes	
KEY FUNCTIONS for integration of probes	
To prevent illegal shipments of this machine to sanctioned countries or to sanctioned customers SPINNER monitors the location of this machine globally via satellite live in real time. We reserve the right to functionally disable the machine if it is brought to a location other than the buyer's agreed and legal place of use. Manipulation of the tracking system will result in the machine being blocked. In the event of a resale, the new operator must provide sufficient identification and the new location of the machine will be released. There are no costs involved. We also reserve the right to block all spare parts supply and support for these machines if the location is unclear or not sufficiently clarified. Please note that when you later resell the machine, you must comply with all applicable export control rules yourself and inform buyers of these.	
SIGNAL LAMP on top of the machine in three colors red / yellow / green as a status indicator Functions: Red: machine alarm Yellow: End of part program / end of bar / parts pallet empty Green: The program is running in automatic mode	
CHIP CONVEYOR as hinged belt conveyor exiting to the right, incl. integrated coolant tank and feed pump. Universal design variant	
	
Rinsing gun in working area	

	
MEASURING PROBE for tool measurement in the working area incl. quick-change coupling. The probe can be used for setup operation in the working area to measure the tools in X/Z direction. Attention: Collision considerations with turrets can lead to restrictions depending on the design of the tools on the disc. Version for standard chuck sizes	
Electrical PREPARATION FOR EXTRACTION for the installation of a standard extraction system recommended by Spinner	
MIST EXTRACTION SYSTEM for working area to match the size of the machine. Suitable for cooling lubricant emulsions with an oil content > 5%!	
AUTOMATIC DOOR for working area door opens the door at the end of the program and closes with Start including the necessary safety technology, suitable for manual loading or automation access  	
STANDARD DOCUMENTATION IN ENGLISH including machine and CNC manuals, is supplied in digital form on the control. Paper manuals are available at an additional charge.	
STANDARD PAINTWORK two colors in light grey RAL7035 and blue grey RAL5008	
EUROPA-STANDARD electrical version as follows: Operating voltage 3x400V +/-10% Mains frequency 50Hz (+/-2%) TN network (5-wire)	
Technical design according to CE standards in accordance with the standards of the European Union with corresponding CE certificate	
PACKAGING screwed onto steel pallet with plastic cover, hermetically sealed, incl. seaworthy preservation, recommended for direct door-to-door transport in shipping containers	
ATTENTION: The product is included in the export list and is subject to the approval of the German authorities BAFA for export to third countries. The buyer shall undertake to observe the applicable export control regulations in the event of resale/delivery. We draw the attention of buyers in third countries to the fact that a delivery obligation is only entered into by us subject to the examination of the end user after receipt of the necessary end-use declarations and subject to official approvals.	



OPTIONAL EQUIPMENT / TOOLING:

ITEM DESCRIPTION	UNIT PRICE (EURO)
TOOL HOLDERS - fixed 125527 TOOLHOLDER PACKAGE "BMT45-Fixed toolholders for Turing" Consisting of: 4 x 125458 radial turningtoolholder BMT45 1 x 125459 axial turningtoolholder BMT45 1 x 125460 axial boringbarholder BMT45 D=32 mm (H=65mm) 3 x 125554 axial boringbarholder BMT45 D=32 mm (H=85mm) 6 x 125461+125462 closure-bolt/plate for not used turret positions BMT45	€ 5,054.00
CLAMPING TOOLS - S1 154960 Collet chuck mini pull-back 42 A5 Hainbuch SPANNTOP® mini pull-back size 42 L=114 for spindle nose DIN 55026-A5, connection: inside thread M72x1.5	€ 5,670.00
154961 Draw tube adapter for Hainbuch Spanntop mini 32 and 42 A5 on MT-36 Thread M72x1.5 - M48x2	€ 186.20
154962 Power chuck 165mm/43mm 3-jaws A SMW Autoblok BH-D 165-46-3-A05, taper hook chuck for spindle head per DIN 55028 - A5, jaw serration: 1/16" with static Nut M50x1.5	€ 4,256.00
154963 Draw tube adapter for SMW BHD 165-3-A5 on MT-36 Thread M50x1.5 - M48x2	€ 266.00
CLAMPING TOOLS - tailstock accessory 110795 Fixed centre MK4 with nut to eject taper, type 671	€ 354.20

TERMS AND CONDITIONS:

1. **PRICE TERMS:** Quoted prices are on **FOB Germany** basis in **EUROS**.
2. **PAYMENT TERMS:**
 - 100% payment will be made through LC at sight to be established in favor of foreign principal supplier.

Or,

 - 90% advance payment will be released equivalent in Pak Rupees upon the submission of Advance Payment Bank Guarantee (APBG). The submitted advance payment BG will be released duly cancelled upon arrival of goods at destination port and submission of copies of shipping / transport documents.
 - 10% balance payment will be released equivalent in Pak Rupees after delivery / installation of the machine, or within 30 days from the date of delivery at the site, whichever comes first. In case of any delay in starting the installation at the buyer's end, this payment will be released accordingly.
3. **ESTABLISHMENT OF LETTER OF CREDIT (LC):** The Letter of Credit (LC) will be established with the name of local company or sister concern company or trading company as applicant / consignee of offered consignment that may be advised at the time of order confirmation. Acceptance of order and Shipment of equipment is subject to approval and issuance of export license from the concerned authorities of exporting country.
4. **CLEARANCE OF THE CONSIGNMENT:** The consignment will be made in the name of supplier or its concern company and clearance of the consignment from the custom / port will be arranged and done by the buyer.
5. **DELIVERY:** Delivery will be made within **3-4 months**, or earlier, following the receipt of the confirmed official purchase order and advance payment. We shall not be held responsible for any delay in shipment due to force majeure, government-imposed restrictions, new import policies, or any factors beyond our control. The shipment schedule is also subject to approval for import by the State Bank of Pakistan.
6. **WARRANTY:** We shall provide an effective standard warranty for a period of **14 MONTHS** from the date of shipment of the machine or **12 MONTHS** from the date of installation / acceptance, whichever comes first. Warranty is against manufacturing defects, faulty design and workmanship. This warranty does not cover damages caused by mishandling, misuse, abuse, inexpert repair, improper transportation, unsuitable storage or use under harsh environment or conditions at buyers' end. During warranty period defective parts will be repaired or replaced by our Principal free of cost at Principals' Ex-works basis.
7. **FORCE MAJEURE:** The term "Force Majeure" shall mean, acts of God, strikes, lockout or other industrial disturbances, acts of public enemy, wars, blockades, insurrection, riots, epidemics, landslides, earthquakes, storms, lightning, floods, washouts, civil disturbances, explosions and any other similar events, not within our control. In such cases the buyer will not impose any penalty on us and will return our earnest money without any deduction or penalties.

8. **RESTRICTIONS:** In the event of unforeseen restrictions imposed on the shipment by the exporting country, or if the consignment is detained / held at any port for infinity period or confiscated, the supplier will reimburse the actual amount paid by the buyer if any. In such cases the buyer will not impose any penalty and this all scenario shall be considered as "Force Majeure".
9. **SPARE PARTS & ACCESSORIES:** We confirm the availability of spare parts and accessories for the offered machine/equipment for a period of 10 years from the date of delivery. The supply and delivery of spare parts and accessories shall be subject to obtaining the necessary export permits/permissions from the relevant authorities of the exporting country, wherever applicable.
10. **VALIDITY:** Our quotation will be valid for 60 days from the date of quotation.