Simulation Modelling Practice and Theory Multi-product Batch Processing Time Maximization Problem --Manuscript Draft--

Manuscript Number:				
Article Type:	Regular Article			
Keywords:	multiproduct batch; processing time maximization; analytical solution; C++; LINGO			
Corresponding Author:	Tatiana Balbi Fraga, Ph.D. Federal University of Pernambuco Caruaru, BRAZIL			
First Author:	Tatiana Balbi Fraga			
Order of Authors:	Tatiana Balbi Fraga			
	Ítalo de Aquino, Ruan Barbosa			
	Regilda Menêzes, da Costa e Silva			
Abstract:	In the plastic bag extrusion process, it is necessary to determine the optimal processing time for batches formed by different products, which are processed simultaneously by the same extruder, but with different processing rates. The batch processing time must be determined in order to meet a series of known constraints, such as the limitation for the quantity produced for each product and for the quantity produced for the set of all products in the same batch. In this paper we present this problem as a new combinatorial optimization problem named Multi-product Batch Processing Time Maximization (MPBPTM) problem. We also present a mathematical model for the MPBPTM problem and an analytical solution method with polynomial time complexity, which proved to be able to obtain optimal solutions for several benchmarks in a very short time, even for very large instances.			

Avenida Marielle Franco, Bairro Nova Caruaru, Caruaru, PE, Brazil

Tatiana Balbi Fraga · Avenida Marielle Franco, Bairro Nova Caruaru, Caruaru, PE, Brazil

To Simulation Modelling Practice and Theory

Caruaru, July 27, 2023

Cover letter

Dear editor,

Along with this letter, I am sending a paper in which I present the Multi-product Batch Processing Time Maximization (MPBPTM) problem, as well as a mathematical model and an analytical solution method with polynomial time complexity.

MPBPTM is a combinatorial optimization problem. The complexity of MPBPTM is mainly attributed to the fact that there is a production limit for the set of products and not just for each product. This restriction causes the problem to be defined as a non-polynomial problem.

The problem was identified by me during the development of a solver for production planning in extruders. As I am applying a local search heuristic, at each iteration I need to generate a new solution, and therefore I need to solve the MPBPTM problem.

However, MPBPTM is also a practical problem and its solution directly influences the efficiency of inventory control in some industries, as is the case of industries in the plastic bag sector.

As is widely known, there are few combinatorial optimization problems that can be solved using exact methods. In this paper we present an exact optimization method for solving the MPBPTM problem, based on the idea of partitioning the problem into two smaller problems.

I had a vague idea about the proposed method while I was presenting the problem to my co-workers, and I managed to develop the method the same day before going to sleep, as I was really excited about the idea of the method and about the impact that this method would generate for the performance of the solver I'm developing for production planning in extruders.

According to the bibliographic research carried out by the authors, the problem and exact method proposed in this paper has not yet been presented in the scientific literature.

Also, the language used in the paper is simple, so that many researchers can easily understand the work.

I am then waiting for your final decision with great expectation of approval of the work for publication in this journal.


Sincerely,

Tatiana Balbi Fraga
Founding leader of the Systems Analysis, Modeling and Optimization Group and Professor of the Production Engineering Course at the Academic Center of Agreste - Federal University of Pernambuco

Graphical Abstract

Multi-product Batch Processing Time Maximization Problem

Tatiana Balbi Fraga, Ítalo Ruan Barbosa de Aquino, Regilda da Costa e Silva Menêzes

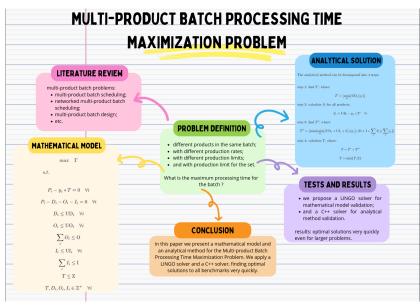

Highlights

Multi-product Batch Processing Time Maximization Problem

Tatiana Balbi Fraga, Ítalo Ruan Barbosa de Aquino, Regilda da Costa e Silva Menêzes

- brief bibliographic review on multi-product batch problems;
- new combinatorial optimization problem named Multi-product Batch Processing Time Maximization (MPBPTM) problem;
- linear integer programming model for the MPBPTM problem;
- exact optimization method for solving the MPBPTM problem.

Multi-product Batch Processing Time Maximization Problem

Tatiana Balbi Fraga^{a,*}, Ítalo Ruan Barbosa de Aquino^a, Regilda da Costa e Silva Menêzes^a

^a Agreste Academic Center - Federal University of Pernambuco, Avenida Marielle Franco, Nova Caruaru, Caruaru, 55014-900, PE, Brazil

Abstract

In the plastic bag extrusion process, it is necessary to determine the optimal processing time for batches formed by different products, which are processed simultaneously by the same extruder, but with different processing rates. The batch processing time must be determined in order to meet a series of known constraints, such as the limitation for the quantity produced for each product and for the quantity produced for the set of all products in the same batch. In this paper we present this problem as a new combinatorial optimization problem named Multi-product Batch Processing Time Maximization (MPBPTM) problem. We also present a mathematical model for the MPBPTM problem and an analytical solution method with polynomial time complexity, which proved to be able to obtain optimal solutions for several benchmarks in a very short time, even for very large instances.

Keywords: multiproduct batch, processing time maximization, analytical solution, C++, LINGO

1. Introduction

The scientific literature presents several papers that address multi-product batch problems. Many works target the problem of multi-product batch scheduling (MPBS), in which it is necessary to determine the production

^{*}corresponding author

Email addresses: tatiana.balbi@ufpe.br (Tatiana Balbi Fraga), italo_ruan_@hotmail.com (Ítalo Ruan Barbosa de Aquino), regilda.smenezes@ufpe.br (Regilda da Costa e Silva Menêzes)

sequence of the products and the ideal batch size for each product, in a production of several products which share the same production facilities and for which demand is known (Eilon, 1985). In this problem, a single product is processed at a time, so it is necessary that the quantity produced is sufficient to meet the demand during the period in which other products are being processed. The solution must be determined in such a way that both setup and storage costs are minimized. Among the authors who addressed this problem are Eilon (1985), Omega Journal (1993) and Liu et al. (2020). Méndez et al. (2000) and Shi et al. (2017) present two parallel multi-product batch scheduling (PMPBS) problems, in which production units of the same type are arranged in parallel, forming each production stage. In this case, it is also necessary to define in which units each product will be processed. The authors also take into account other constraints for the problem (e.g.,release time and due date for the products, and sequencing constraints due to mismatched product colors sequences) and other goals (i.e., optimize customer satisfaction and/or the plant performance). In the papers mentioned above, production in a single unit or in a serial flowshop plant is considered, in which all products follow a linear flow through the production stages. Kim et al. (1996) consider the multi-product batch problem in networked processes. As defined by the authors, in this case, the production units are not arranged in lines, and the connection between the units may or may not exist. Therefore, the production paths in the flowshop network can be different for each product. Also the passing of previous batch can be possible so that the final sequence of the production at the last stage units can be different from the initial sequence. In all papers presented above, each batch contains only one product type, and each machine can process only one batch (or product type) at a time. Li et al. (2022) deal with a PMPBS problem involving incompatible families with different job sizes and capacity constraints. In this problem, solutions are accepted in which two or more batches are processed simultaneously on the same machine. However, there are no production limitations for the production of each product group. The paper of Li et al. (2022) also presente an extensive literature review on production batch scheduling problems. Other important works deal with the problem of a multi-product batch plant design (MPBPD). In this case the problem is to obtain the configuration of the plant and the equipment that minimize the capital cost of all the equipment items needed to fulfill the production requirements (Ravemark and Rippin, 1998).

In this work, we are concerned with determining the ideal processing time

for a single batch consisting of a set of products, each product being or not different from the other products of the same batch. That is, we consider a specific case where different products are processed simultaneously on the same processor. This case occurs, for example, during the processing of plastic bags in extruders, where the resins are melted, then pass through a cylinder forming a balloon and this balloon, after cooling, is stored in a coil which, in turn, is cut into several smaller coils with different models of plastic bags.

As scientific contributions, in this paper we define a new multi-product batch problem, named multi-product batch processing time maximization (MPBPTM) problem, as well as a mathematical model and a polynomial time complexity analytical solution optmization method for solving this problem.

In the next sections, a presentation of problem is made along with an application example. Section 3 presents an interger linear mathematical model for the problem and section 4 presents an analytical method for its solution. Section 5 presents the tests and results obtained by a solver in C++ applying the analytical solution and a solver developed in LINGO to new proposed benchmarks. In sections 7 and 8, the contributions to this work are informed and acknowledgments are given, respectively. Finally, section 6 presents the paper's conclusions and suggestions for future works.

2. Multi-product batch processing time maximization problem

The multi-product batch processing time maximization problem arises when a set of different products are processed simultaneously in a same production batch. In this problem, it is considered that the quantity produced of each product is directly proportional to the processing time, however, with a different constant of proportionality (production rate) for each product. In addition, there is a maximum quantity allowed for the production of batch products, defined both individually and for the set. The maximum production quantity of each product is mainly defined according to the demand for the product. However, it is still possible to stock the products and/or send them to the outlets. In both cases, there is a stocking/shipping limit for each product and a stocking/shipping limit for the set of products in the batch. Also, there is a time limit available for processing the batch. The problem consists of defining the maximum processing time for the batch, respecting the limitations related to the quantities produced. For a better understanding of the problem, an example is presented below.

Example: A certain machine must process a batch containing 2 different products: A and B. The production rate of A is 60 g/min while the production rate of B is 40 g/min. The factory has free stock for a maximum of 3000 g of any product, and, according to the company's inventory policy, a maximum of 3000 g of product A and 2000 g of product B can be stocked at the factory. There is a demand for 1000 g of product A and 500 g of product B. The factory has an outlet that has free space in stock of 1000 g, which can receive a maximum of 600 g of each product. A maximum time of 100 minutes of this machine can be allocated for processing this batch. What is the maximum possible time for processing this batch?

3. Mathematical model

Given that:

 UD_i is the demand for the product i;

I is the maximum quantity allowed for additional factory storage of all products in the batch;

 UI_i is the maximum quantity allowed for stocking the product i in the factory;

O is the maximum quantity allowed for shipment of all products to outlets;

 UO_i is the maximum amount of product i that can be shipped to outlets;

 p_i is the production rate of product i;

Z is the timeout for batch processing;

 P_i is the amount of product i produced;

 D_i is the amount of product *i* delivered for the demand;

 O_i amount of product i shipped to factory outlets;

 I_i is the amount of product i that will be stored at the factory;

T is the batch processing time.

We have the problem:

s.t.

$$P_i - p_i * T = 0 \quad \forall i \tag{2}$$

$$P_i - D_i - O_i - I_i = 0 \quad \forall i \tag{3}$$

$$D_i \le \mathrm{UD}_i \quad \forall i$$
 (4)

$$O_i \le UO_i \quad \forall i$$
 (5)

$$\sum_{i} O_i \le O \tag{6}$$

$$I_i \le UI_i \quad \forall i$$
 (7)

$$\sum_{i} I_i \le I \tag{8}$$

$$T \le Z$$
 (9)

$$T, D_i, O_i, I_i \in \mathbb{Z}^+ \quad \forall i$$
 (10)

where:

Constraints in (2) relate the quantity produced, P_i , to batch processing time T. Constraints in (3) calculate the quantity produced, P_i , as a function of the primary variables, D_i , O_i and I_i . Constraints in (4), (5), and (7) state that the quantity delivered to demand, the quantity shipped to the autlets, and the factory-stocked quantity of each product must be less than their respective known limits. Constraints (6) and (8) state that both the sum of product quantities sent to the autlets and the sum of product quantities stocked in the factory must be less than their respective maximum allowed values. The restriction in (9) establishes that there is a batch processing time limit, Z, that must be respected. And finally, the constraints in (10) inform the nature of the decision variables.

4. Analytical solution

It is possible to consider the factory stock and the outlets stock as single stock, so we have:

$$E_i = O_i + I_i \tag{11}$$

where E_i is the sum of the quantity stored at the factory and the quantity sent to the outlets of the product i.

So that:

$$E_i \le UO_i + UI_i$$
 (12)

and

$$\sum_{i} E_{i} \le O + I \tag{13}$$

It is also possible to split the batch processing time into two time slots:

$$T = T' + T'' \tag{14}$$

and consider that T' is the maximum processing time used only for production that will meet the demand. Thus, we can find T', solving the reduced problem:

$$max \quad T'$$
 (15)

s.t.

$$D_i - p_i * T' = 0 \quad \forall i \tag{16}$$

$$D_i \le \mathrm{UD}_i \quad \forall i$$
 (17)

$$D_i, T' \in \mathbb{Z}^+ \quad \forall i$$
 (18)

This reduced problem can be rewritten in the form:

$$max \quad T' \tag{19}$$

s.t.

$$T' \le |\mathrm{UD}_i/\mathrm{p}_i| \quad \forall i$$
 (20)

So we have that T' will be the smallest of the ratios $\lfloor \mathrm{UD}_i/\mathrm{p}_i \rfloor$ of all products.

Once we find the value of T', we can calculate the value of unmet demand for each product after T', S_i , through the equations in (21).

$$S_i = UD_i - p_i * T' \quad \forall i$$
 (21)

Now we consider that the time interval T'' will be used for the production of the quantities that will be stored (in the factory and in the outlets), as well as of the demand not met by the production in the first time interval, S_i .

In this case, we can find T''' by solving the second reduced problem:

$$max \quad T''$$
 (22)

s.t.

$$E_i - p_i * T'' = 0 \quad \forall i \tag{23}$$

$$E_i - S_i \le UO_i + UI_i \quad \forall i$$
 (24)

$$\sum_{i} E_i - S_i \le O + I \tag{25}$$

$$E_i, T'' \in \mathbb{Z}^+ \quad \forall i$$
 (26)

Again, using a little algebra, we can rewrite this reduced problem in the form:

$$max \quad T'' \tag{27}$$

s.t.

$$T'' \le \lfloor (\mathrm{UO}_i + \mathrm{UI}_i + S_i)/\mathrm{p}_i \rfloor \quad \forall i$$
 (28)

$$T'' \le \lfloor (O + I + \sum_{i} S_i) / \sum_{i} p_i \rfloor$$
 (29)

So, being N the number of products in the batch, we will have N+1 inequalities that limit the value of T'' by constants and again T'' will be defined by the smallest value.

So, the analytical method can be decomposed into 4 steps:

step 1: find T', where:

$$T' = \lfloor \min_{\forall i} \{ UD_i / p_i \} \rfloor$$
 (30)

step 2: calculate S_i for all products.

$$S_i = UD_i - p_i * T' \quad \forall i$$
 (31)

step 3: find T'', where:

$$T'' = \left[\min\left\{\min_{\forall i} \left\{ (\mathrm{UO}_i + \mathrm{UI}_i + S_i)/\mathrm{p}_i \right\}, (\mathrm{O} + \mathrm{I} + \sum_i S_i) / \sum_i \mathrm{p}_i \right\} \right]$$
 (32)

step 4: calculate T, where:

$$T = T' + T'' \tag{33}$$

$$T = \min\{T, Z\} \tag{34}$$

It is probably possible to extend this thinking to the solution of a class of linear optimization problems. However, we will work on this concept in an upcoming paper.

Solution for the example presented before

Applying the method for solving the example presented in section 2, we have:

$$T' \leq \lfloor 1000 \text{ g/(60 g/min)} \rfloor$$

$$T' \le 16 \text{ min}$$
 for A

$$T' \le \lfloor 500 \text{ g}/(40 \text{ g/min}) \rfloor$$

$$T' \le 12 \text{ min}$$
 for B

so:

$$T' = 12 \min$$

Then:

$$S_A = 1000 \text{ g} - 12 \text{ min} * 60 \text{ g/min} = 280 \text{ g}$$

$$S_B=500~\mathrm{g}-12~\mathrm{min}*40~\mathrm{g/min}=20~\mathrm{g}$$

And so we have:

$$T'' \le \lfloor (3000 \text{ g} + 600 \text{ g} + 280 \text{ g})/(60 \text{ g/min}) \rfloor$$

$$T'' \le 64 \text{ min}$$
 for A

$$T'' \leq \lfloor (2000~\mathrm{g} + 600~\mathrm{g} + 20~\mathrm{g})/(40~\mathrm{g/min}) \rfloor$$

$$T'' \le 65 \text{ min}$$
 for B

$$T'' \leq \lfloor (1000~\mathrm{g} + 3000~\mathrm{g} + 300~\mathrm{g})/(100~\mathrm{g/min}) \rfloor$$

$$T'' \le 43 \text{ min}$$
 for A and B

So that:

$$T'' = 43 \min$$

So we have:

$$T=55~\mathrm{min}$$

As T < Z, then T = 55 min will certainly be the optimal solution.

In this case we will have:

$$P_A = 3300 \text{ g e } P_B = 2200 \text{ g}$$

$$D_A = 1000 \text{ g e } D_B = 500 \text{ g}$$

$$E_A = 2300 \text{ g e } E_B = 1700 \text{ g}$$

Note that it is not important to know the values of O_i and I_i , $\forall i$, however, after determining a solution, these values can be found by taking a solution from the undetermined system of inequalities:

$$O_i + I_i = E_i \quad \forall i \tag{35}$$

$$O_i \le UO_i \quad \forall i$$
 (36)

$$\sum_{i} O_i \le O \tag{37}$$

$$I_i \le UI_i \quad \forall i$$
 (38)

$$\sum_{i} I_{i} \le I \tag{39}$$

$$O_i, I_i \in \mathbb{Z}^+ \quad \forall i$$
 (40)

5. Tests and results

To test the developed model and analytical solution method, we created a solver in C++ and a solver in LINGO (https://github.com/tbfraga/COPSolver). The tests were performed on a notebook with an Intel i7 processor. We tested the solvers developed for the benchmarks presented on Tables 1, 2 and 3, and for randon benchmarks generated by the following functions:

$$p_i = \text{rand}()\%30 + 10$$
 (41)

$$UD_i = rand()\%3000 + 800; (42)$$

$$seed1 = rand()\%3000 + 500; (43)$$

$$seed2 = rand()\%5000 + 1000; \tag{44}$$

$$O = N/2 * seed1; (45)$$

$$UO_i = rand()\%(seed1 - 500) + 500;$$
 (46)

$$I = N/2 * seed2; \tag{47}$$

$$UI_i = rand()\%(seed2 - 1000) + 1000;$$
 (48)

$$Z = 100;$$
 (49)

i	1	2	total
\mathbf{p}_i	60	40	
UD_i	1000	500	
UO_i	600	600	1000
UI_i	3000	2000	3000
		\mathbf{Z}	100

Table 1: Benchmark MPBPTMP 001

Randomly generated benchmarks were named RMPBPTMP N, being N the number of products. Seeking to enable the reproduction of the results, in the computational construction of the benchmarks we used the function srand((unsigned) source), where source is a defined value. To build the results presented in this work, we used source=0. The benchmarks used for the tests performed can be consulted at github.com/blinded.

$\underline{}$	1	2	3	total
\mathbf{p}_i	60	40	50	
UD_i	1000	500	800	
UO_i	600	600	600	1500
UI_i	3000	2000	1000	3500
			\mathbf{Z}	100

Table 2: Benchmark MPBPTMP 002

$\underline{}$	1	2	3	4	5	6	7	8	9	10	total
\mathbf{p}_i	60	40	50	40	30	50	60	10	20	40	
UD_i	1000	500	800	500	400	500	2000	300	500	1000	
UO_i	600	600	600	1500	300	200	500	800	0	200	3000
$_{ m UI}_i$	3000	2000	1000	800	3000	1000	400	300	200	0	5000

Z 100

Table 3: Benchmark MPBPTMP 003

Table 4 presents the results obtained by applying the analytical method (C++ solver) and the LINGO solver for the solution of the previously presented benchmarks.

It is important to point out that the LINGO solver was developed with the purpose of validating the results found by the proposed analytical method. As the analytical method is a polynomial time complexity method, we did not intend to compare computational costs, however it is possible to verify that both solvers are capable of finding optimal solutions for the proposed benchmarks very quickly, even for very large problems.

We have considered here a one-day period problem, so in a future work we will study the complexities of solving a multi-period problem and try to propose new solution methods if needed.

problem	LINGO solver	time (s)	analytical method	time (s)
MPBPTMP 1	55	0.04	55	0.001
MPBPTMP 2	48	0.06	48	0.001
MPBPTMP 3	30	0.09	30	0.001
RMPBPTMP 20	100	0.08	100	0.001
RMPBPTMP 50	98	0.12	98	0.001
RMPBPTMP 100	98	0.12	98	0.002
RMPBPTMP 1,000	78	3.10	78	0.002
RMPBPTMP 10,000	70	168.87	70	0.006

Table 4: Results obtained with the LINGO solver and the analytical method

6. Conclusions and suggestions for future works

In this paper we presented the Multi-product Batch Processing Time Maximization problem, as well as a mathematical model and an analytical solution method for this problem. The mathematical model and analytical method were tested, respectively, by a solver developed with the LINGO software, from LINDO Systems, and with a solver developed in C++ language. Optimum results were found for all proposed benchmarks, very quickly, even in the case of very large problems, which demonstrates the efficiency of the proposed method. As in this paper we considered a planning period of one day, in a future work we will study the complexities that arise when considering the same problem in a multi-period scenario. We will also verify if there is the possibility of extending the proposed analytical method to solve a class of linear integer programming problems with similar characteristics to the studied problem.

7. CRediT authorship contribution statement

T.B. Fraga: Conceptualization, Project administration, Supervision, Software, Methodology, Validation, Formal analysis, Writing – original draft, Writing – review & editing. Í.R.B. Aquino: Data curation. R.C.S. Menêzes: Data curation.

8. Acknowledgments

We are enormously grateful to Coordenação de Aperfeiçoamento de Pessoal de Nível Superior (CAPES) and to Conselho Nacional de Desenvolvimento Científico e Tecnológico (CNPq) for the financial support provided to our projects. We also thank LINDO systems team for the LINGO software license, without which this work would not have been possible and the to the owner of the company in the plastics sector, who allowed us to learn about his company's production process. Finally, we would like to thank Pró-reitoria de Extensão e Cultura da UFPE (PROExC) and the Research Director of Propesqi (Pró-reitoria de Pesquisa e Inovação da UFPE) for their support and recognition of our work, and dear Professors Antônio José da Silva Neto and João Flávio Vieira de Vasconcellos from IPRJ/UERJ, who contributed significantly to the formation of essential skills for the development of our projects. We also thank my co-worker Marcos Luiz Henrique, for having helped by evaluating the mathematical model and solution method proposed in this paper.

References

- Eilon. (1985). Multi-product batch production on a single machine A problem revisited. *OMEGA Int. J. of Mamt Sci.*, Vol. 13 (5), pp. 453–468.
- Kim, M., Jung, J. H. and Lee, I. (1996). Intelligent scheduling and monitoring for multi-product networked batch processes. *Computers chem. Engn*, Vol. 20 (Suppl.), pp. 1149–1154.
- Li, C., Wang, F., Gupta, J.N.D., Chung, T. (2022). Scheduling identical parallel batch processing machines involving incompatible families with different job sizes and capacity constraints. *Computers & Industrial Engineering*, Vol. 169, pp. 108115.
- Liu, G., Li, F., Yang, X., and Qiu. S. (2020). The multi-stage multi-product batch-sizing problem in the steel industry. Applied Mathematics and Computation, Vol. 369, 124830.
- Méndez, C.A., Henning, G.P., Cerdá, J. (2000). Optimal scheduling of batch plants satisfying multiple product orders with different due-dates. *Computers and Chemical Engineering*, Vol. 24, pp. 2223–2245.

- OMEGA Journal. (1993). Single Machine Multi-product Batch Scheduling: Testing Several Solution Methods. *OMEGA Int. J. of Mgmt Sci.*, Vol. 21 (6), pp. 709–711.
- Ravemark, D. E., and Rippin, D. W. T. (1998). Optimal design of a multiproduct batch plant. *Computers chem. Engng*, Vol. 22 (1-2), pp. 177–183.
- Shi, B., Qian, X., Sun, S., Yan, L. (2017). Rule-based scheduling of multi-stage multi-product batch plants with parallel units. *Chinese Journal of Chemical Engineering*, in press.

Source file (Word or (La)TeX)

Click here to view linked References

Click here to access/download

Source file (Word or (La)TeX)

manuscript.tex

