




MANUAL CHAIN BLOCK

STANDARD : EN 13157

- › The Europull Manual Chain hoist is used in construction, marine, oilfield projects.
- › Chain hoist capacity range from 0.5 ton to 100 ton.
- › Multi-support structure, more reasonable force, flexible operation and low failure rate of the transmission system.
- › With double pawls, increase the safety factor in 2 times.
- › All nuts in anti-slip nuts.
- › Smooth rotation, high efficiency, light hand pull.
- › The hand cover uses special crimping process, keep the hand chain not tilting and not snapping.
- › Fitted with high strength grade 80 alloy steel load chain with galvanized finish for corrosion resistance (comply with EN 818-7, safety factor 4).

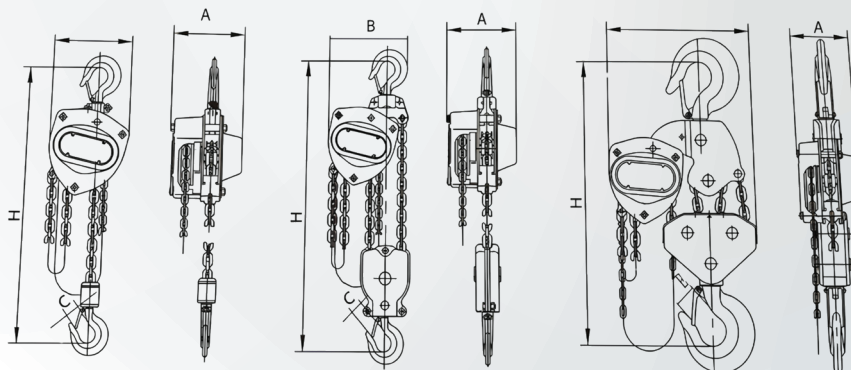

EPC - 0.5T TO 2T

EPC - 3T TO 5T

EPC - 10T

Technical details

Model		EPC-0.5T	EPC-1T	EPC-2T	EPC-3S	EPC-3D	EPC-5T	EPC-7.5T	EPC-10T	EPC-15T	EPC-20T	EPC-30T	EPC-50T	EPC-100T
Capacity	(t)	0.5	1	2	3	3	5	7.5	10	15	20	30	50	100
Standard lift	(m)	3	3	3	3	3	3	3	3	3	3	3	3	3
Running Test	(t)	0.75	1.5	3	4.5	4.5	7.5	10	12.5	15	20	30	50	100
Effort required to lift max load	(N)	240	250	335	363	370	360	410	380	435	435*2	435*2	435*2	435*4
Load chain number of falls		1	1	1	1	2	2	3	4	6	8	12	22	20*2
Load chain Diameter	(mm)	5	6	8	10	8	10	10	10	10	10	10	10	10
Hand chain size	(mm)	5*25	5*25	5*25	5*25	5*25	5*25	5*25	5*25	5*25	5*25	5*25	5*25	5*25
Net Weight	(kg)	11.00	12.50	19.50	29.00	24.00	41.30	79.00	78.50	120.00	193.00	220.00	1092.00	1500.00
Packing size (cm)	(cm)	24*19*18	28*21*21	34*26*20	34*26*20	34.5*24*16	41*32*24	48*42*18.5	48*42*18.5	69*56*20	78*68*20	85*67*30	110*100*130	220*320*800
Dimension (mm)	A	132	151	175	176	151	189	188	189	190	192	330	410	745
	B	148	172	210	230	208	280	398	463	580	630	670	900	1140
	C	28	32	36	46	46	46	57	57	75	82	106	130	170
	H	345	376	470	565	475	688	720	765	870	890	1000	1950	2680

MANUAL LEVER HOIST


STANDARD : EN 13157

» The Europull series manual lever hoist can be widely used for equipment installation, lifting and tightening goods, dragging loads in factories, mines, construction sites, power plants, boat manufacturing etc.

» It is an ideal device especially in narrow space, open air and over-head places for pulling and stretching at angle.

FEATURES:

- » Compact, light yet durable.
- » Double-pawl brake system designed for safety and reliability.
- » Heat treatment steel plates, gears and shafts for enhanced strength, forged upper, lower hooks with forged steel safety latches, high tensile alloy steel chain.
- » The lifting chain can be freely pulled and operated by special separating block design.
- » Weston style automatic load brake with double pawls load reduction.
- » 360° rotating handle eases of using in confined space.
- » As for the N position of the shift block, the position of the bottom hook can be freely adjusted according to the need when unloaded.
- » Safety factor: 4 to 1
- » Fatigue tested at 1.5 times of working load limit to 2000 cycles.

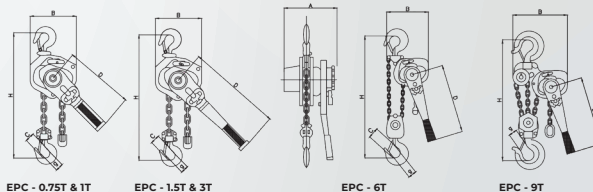

Technical details

Model		EPL-0.75T	EPL-1T	EPL-1.5T	EPL-2T	EPL-3T	EPL-6T	EPL-9T
Capacity load	(t)	0.75	1	1.5	2	3	6	9
Load chain Number of falls		1	1	1	1	1	2	3
Load chain specifications	(mm)	6.3x19	6.3x19	7.1x21	7.1x21	9x27	9x27	9x27
Effort required to lift max load	(N)	260	210	450	460	430	490	490
Test Load	(kg)	1130	1500	2250	3000	4500	9000	13500
Standard lift	(m)	1.5	1.5	1.5	1.5	1.5	1.5	1.5
Net weight	(kg)	6.90	7.10	9.70	9.88	16.30	26.70	38.50
Gross weight	(kg)	7.90	8.10	10.70	10.88	17.30	28.70	40.50
Packing size	(cm)	38*14*19	38*14*19	53*16*22	53*16*22	55*18*23	56*20*24	58*37*22
Add 1m weight	(kg)	0.86	0.86	1.10	1.10	1.76	3.52	5.28
Dimensions(mm)	A	148	148	163	163	191	191	191
	B	128	128	148	148	181	244	314
	C	37	45	47	47	62	78	-
	D	256	256	368	368	368	368	368
	g	28	33	33.5	33.5	43.5	51	64
	H	295	310	335	335	405	550	680

ELECTRICAL CHAIN BLOCK

EPC - ELECTRICAL CHAIN HOIST & LOAD LIMITER

Technical Parameters

Capacity (ton)	Hoist lifting(Up&Down)				Weight (kg)
	Lifting speed (m/min)	Motor Power (kw)	Dia of Chain (mm)	No. Of chain falls	
0.5	7.2	0.8	6.3	1	50
1	6.6	1.5	7.1	1	67
2	6.6	3.0	10.0	1	120
3	4.4	3.0	10.0	2	137
5	2.7	3.0	11.2	2	148
7.5	1.8	3.0	11.2	3	203
10	2.7	3.0*2	11.2	4	344
15	1.8	3.0*2	11.2	6	412
20	1.4	3.0*2	11.2	8	522
25	1.1	3.0*2	11.2	10	540
30	0.9			12	820
50	0.55	3.0*2	11.2	20	930

Available - 3 Phase, 415v & 380v 50/60Hz

EPC-WT - ELECTRICAL CHAIN HOIST WITH TROLLEY & LOAD LIMITER

Technical Parameters


Capacity (ton)	Trolley running (Right&Left)		Hoist lifting (Up&Down)				Weight (kg)
	Running speed (m/min)	I-beam (mm)	Lifting speed (m/min)	Motor Power (kw)	Dia of Chain (mm)	chain falls	
0.5	21	58-153	7.2	0.8	6.3	1	78
1	21	58-153	6.6	1.5	7.1	1	115
2	21	82-178	6.6	3.0	10.0	1	167
3	21	100-178	4.4	3.0	10.0	2	195
5	21	100-178	2.7	3.0	11.2	2	238
7.5	21	100-178	1.8	3.0	11.2	3	297
10	21	152-220	2.7	3.0*2	11.2	4	491
15	21	152-220	1.8	3.0*2	11.2	6	706
20	21	152-220	1.4	3.0*2	11.2	8	816
25	21	152-220	1.1	3.0*2	11.2	10	834
30	21	152-220	0.9	3.0*2	11.2	12	1124
50	21	152-220	0.55	3.0*2	11.2	20	1224

Available - 3 Phase, 415v & 380v 50/60Hz



TROLLEY

EPPT - PLAIN TROLLEY


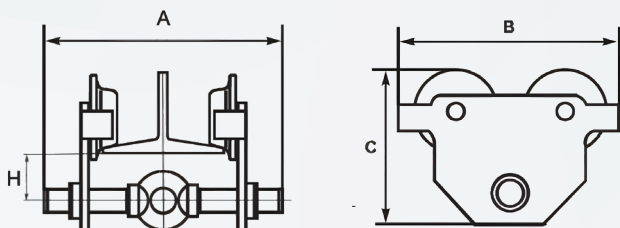


Push Trolley [Model : EPPT]

Model	Capacity	I-Beam Width (mm)	N.W. (kg)	A (mm)	B (mm)	C (mm)	H (mm)
EPPT - 005	0.5 t	50-220	5	285	198	158	64.5
EPPT - 010	1t	58-220	8.7	300	238	183	66
EPPT - 020	2t	66-220	13.9	300	277	208	75
EPPT - 030	3t	74-220	23.5	328	324	249	85
EPPT - 050	5t	90-220	40	354	373	296.5	100

Standard: EN 13157

EPGT - MANUAL GEAR TROLLEY

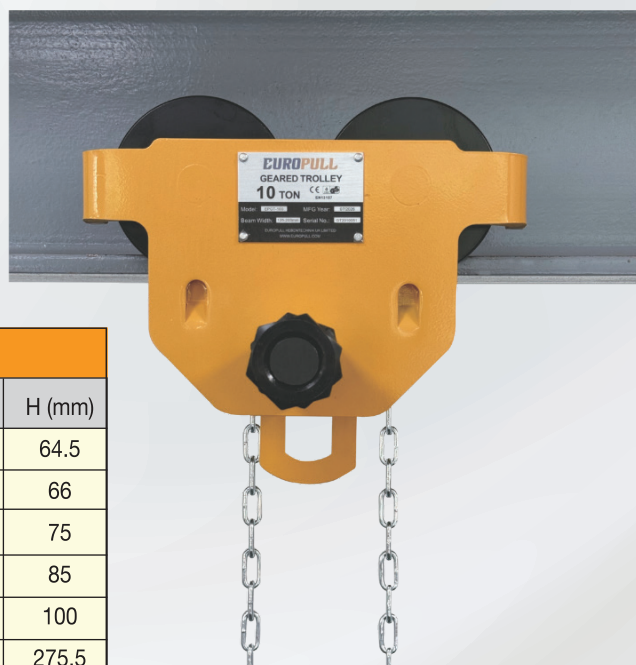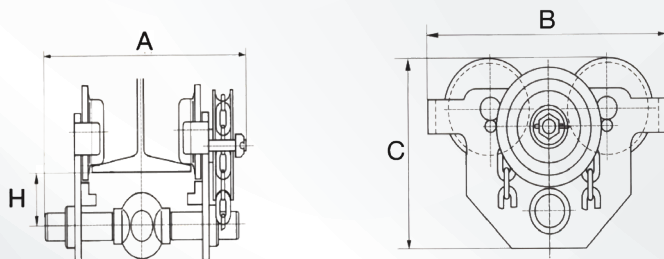

Gear Trolley [Model : EPGT]


Model	Capacity	I-Beam Width (mm)	N.W. (kg)	A (mm)	B (mm)	C (mm)	H (mm)
EPGT - 005	0.5 t	50-220	9	352.5	198	158	64.5
EPGT - 010	1t	58-220	12.6	353.5	238	183	66
EPGT - 020	2t	66-220	18.5	362	277	208	75
EPGT - 030	3t	74-220	28	406.5	324	249	85
EPGT - 050	5t	90-220	45	434.5	373	296.5	100
EPGT - 100	10t	125-203	103	487.5	455	490	275.5

Standard: EN 13157

All dimension are subject to change without prior notice

BEAM CLAMP

EP-BC - BEAM CLAMP

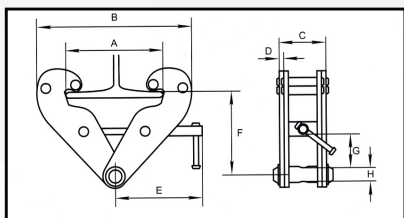

BEAM CLAMP (MODEL: EP-BC)							
Model		EP-BC010	EP-BC020	EP-BC030	EP-BC050	EP-BC100	
Rated Load (Ton)		1	2	3	5	10	
Tested Load (Ton)		1.5	3	4.5	7.5	15	
Flange width mm		75-220	75-220	80-320	80-320	90-320	
(Dimensions mm)	Max. A	260	260	354	354	365	
	Min. B	180	180	235	235	320	
	Max. B	260	360	490	490	505	
	C	72	76	103	110	120	
	D	5	6	8	10	12	
	E	215	215	260	260	280	
	Max. F	155	155	225	225	235	
	Min. F	102	102	140	140	170	
	Min. G	25	25	45	45	50	
	H	22	22	24	28	40	
Net weight		Kg	3.8	4.6	9	11	16

Standard: EN 13155

DRUM LIFTER

EPSL - DRUM LIFTER/ DRUM CLAMP

- » For safe lifting and transporting of steel (oil) drums.
- » With automatic locking mechanism.
- » The DSL steel drum clamps can be used single or per pair as well.
- » Avoid snatch or shock loading.
- » Clamps firmly on 2-leg Grade 80 lifting chain.
- » This clamp is extremely light weight and very quick and easy to use.

Standard: EN13155

Model	WLL (t) per pair	Jaw Opening(mm)	Net Weight(kg)
EPSL -1	1.0	1-13	2.1
EPSL -2	2.0	3-22	4.7



CARGO LASHING

Europull cargo lashing systems, made with high quality polyester yarn, are light weight and easy to use. The ratchet buckle and corresponding straps make an optimum combination to secure

Technical Details

Webbing width	Minimum Breaking Strength	End-Fitting Type	Type
1"	1,000 Kgs	Double J Hook	Ratchet
2"	5,000 Kgs	Double J Hook	Ratchet
3"	10,000 Kgs	Double J Hook	Ratchet



POLYESTER SLINGS





- » All of our slings are made of A-A Grade polyester yarn.
- » All of them are specially PU coated, which makes them tighter, more durable & smooth.
- » **CE & G.S. certified**
- » **Double ply with reinforced lifting eyes.**
- » **Working Load:** 5000 kg
- » **Color:** Red
- » **Width:** 125mm/150mm
- » **Length Available:** 1m to 100m
- » **Elongation with working load:** 2-3%.
- » **Length tolerance:** Nominal length $\pm 3\%$.
- » **Material:** 100% high tenacity industry polyester yarn. Resistant to most acids but not to strong alkalis.
- » **Marking:** The slings are provided with a blue label with manufacturer's symbol, working load limit (WLL), length, CE marking and a label with handling instructions.
- » **Temperature range:** Approx. -40°C - $+100^{\circ}\text{C}$.

Capacity chart in KGS for 1-PLY and 2-PLY FLAT POLYESTER WEBBING SLINGS													
				M = 1 		M = 0.8 		M = 2 		M = 1.40 		M = 1 	
Color code	WLL (Ton / Kgs)	WIDTH		STRAIGHT LIFT 100%		CHOKER LIFT 80%		BASKET U-LIFT 200%		AT ANGLE BETA 140%		AT ANGLE BETA 100%	
		6:1(Inch - mm)	7:1	1 PLY	2 PLY	1 PLY	2 PLY	1 PLY	2 PLY	1 PLY	2 PLY	1 PLY	2 PLY
Violet	1 - 1,000	1"- 25mm	30mm	500	1000	400	800	1000	2000	700	1400	500	1000
Green	2 - 2,000	2"- 50mm	60mm	1000	2000	800	1600	2000	4000	1400	2800	1000	2000
Yellow	3 - 3,000	3"- 75mm	90mm	1500	3000	1200	2400	3000	6000	2100	4200	1500	3000
Grey	4 - 4,000	4"- 100mm	120mm	2000	4000	1600	3200	4000	8000	2800	5600	2000	4000
Red	5 - 5,000	5"- 125mm	150mm	2500	5000	2000	4000	5000	10000	3500	7000	2500	5000
Brown	6 - 6,000	6"- 150mm	180mm	3000	6000	2400	4800	6000	12000	4200	8400	3000	6000
Blue	8 - 8,000	8"- 200mm	240mm	4000	8000	3200	6400	8000	16000	5600	11200	4000	8000
Orange	10 - 10,000	10"- 250mm	300mm	5000	10000	4000	8000	10000	20000	7000	14000	5000	10000
Orange	12 - 12,000	12"- 300mm	300mm	6000	12000	4800	9600	12000	24000	8400	16800	6000	12000

Capacity chart in KGS for 3-PLY and 4-PLY FLAT POLYESTER WEBBING SLINGS													
				M = 1 		M = 0.8 		M = 2 		0°-45° M = 1.40 		45°-60° M = 1 	
Color code	WLL (Ton / Kgs)	WIDTH				CHOKER LIFT 80%		BASKET U-LIFT 200%		AT ANGLE BETA 140%		AT ANGLE BETA 100%	
		6:1 (Inch - mm)	7:1	3 PLY	4 PLY	3 PLY	4 PLY	3 PLY	4 PLY	3 PLY	4 PLY	3 PLY	4 PLY
Violet	1 - 1,000	1"- 25mm	30mm	1500	2000	1200	1600	3000	4000	2100	2800	1500	2000
Green	2 - 2,000	2"- 50mm	60mm	3000	4000	2400	3200	6000	8000	4200	5600	3000	4000
Yellow	3 - 3,000	3"- 75mm	90mm	4500	6000	3600	4800	9000	12000	6300	8400	4500	6000
Grey	4 - 4,000	4"- 100mm	120mm	6000	8000	4800	6400	12000	16000	8400	11200	6000	8000
Red	5 - 5,000	5"- 125mm	150mm	7500	10000	6000	8000	15000	20000	10500	14000	7500	10000
Brown	6 - 6,000	6"- 150mm	180mm	9000	12000	7200	9600	18000	24000	12600	16800	9000	12000
Blue	8 - 8,000	8"- 200mm	240mm	12000	16000	9600	12800	24000	32000	16800	22400	12000	16000
Orange	10 - 10,000	10"- 250mm	300mm	15000	20000	12000	16000	30000	40000	21000	28000	15000	20000
Orange	12 - 12,000	12"- 300mm	300mm	18000	24000	14400	19200	36000	48000	25200	33600	18000	24000



HAND PALLET TRUCK

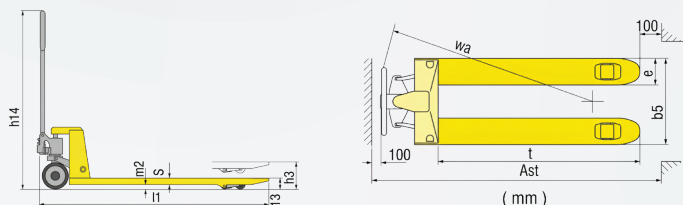


Adjustable straight tappet



Adjustable pump cap



Entry roller for easy operation



Fully rubber wrapped handle
for better grip

Key Features:

Construction & Frame: Forged High Tensile Heavy-duty steel, channel steel construction for strength, with reinforced forks and steel hangers.

Hydraulics:

- » Quick-Lift: Reaches maximum lift in a few strokes (e.g., 10-12 strokes).
- » Controlled Lowering: Special valve for smooth, controlled descent.

Operator Comfort & Control:

- » Ergonomic Handle: Cushioned, rubber-wrapped, with a spring-loaded return to upright.
- » 3-Position Control: Finger-tip lever for Raise, Lower, & Neutral.

Model		EP-BF25	LNA35	QBL5
Capacity	Ton	2.5	3.5	5
Service weight	kg	70	90	105
Steering wheel	mm	ø200	ø180	ø200
Fork wheel	mm	ø80	ø75	ø84
Max. lift height	h3(mm)	185	175	195
Total height	h14(mm)	1224	1214	1240
Lowered fork height	h13(mm)	85	75	88
Overall length	l1(mm)	1533/1603	1533/1603	1533/1603
Fork dimension	s/e/t	50/160/1150	50/160/1150	60/160/1150
Distance between fork-arms outside	b5(mm)	550	550	550
Ground clearance centre of wheel base	m2(mm)	16	16	16
Aisle width for pallets 1000x1200 crossways	Ast(mm)	1730/1800	1730/1800	1730/1800
Aisle width for pallets 800x1200 lengthways	Ast(mm)	1730/1800	1730/1800	1730/1800
Turning radius	Wa(mm)	1266/1336	1266/1336	1266/1336

STANDARD : EN ISO 3691-5: 2014





SAFETY HARNESS

EP500+EP125 - SAFETY HARNESS

EUROPULL - FULL BODY SAFETY HARNESS

EUROPULL EP500 full body safety harness enhances the level of safety to the maximum and provides comfort to the wearer working at heights.

Salient features:

- » Secure fit ensuring safety and comfort.
- » Retro-reflective strip/strands and hi-visibility material for better visibility even in low illumination areas. 24/7
- » 7 point harness designed for increasing safety, comfort and suit different body contours.
- » A - Shape rear reinforcement for secure fit to avoid slippage.
- » Light weight high strength forged aluminium dorsal D - Ring.
- » Muddle free design.

Description

7 Points Adjustment | Rear Anchorage Point (forged dorsal ring with smooth finish) | Adjustable Shoulder and Thigh Straps with flat buckles | Reflective Tape on shoulders | Reflector Webbing Yarn | Webbing width - 45mm | Breaking strength 5000 lbs | High visibility color

Standard: EN361:2002, EN 355:2002, EN 354, and EN 362:2004



Rear Anchor Point fitted with aluminium ring



Adjustable Chest Webbing with tools holder



Reflective Tape on Shoulder for better visibility



Chrome Finish Steel Buckles for corrosion resistance



A shape Rear Webbing for avoiding slippage

EP 125 (EP125+EP5104+EP5204)

EUROPULL Shock Absorber with double webbing lanyard with 2 Rebar hooks and 1 Snap Hook 25Kn.

Salient features:

Double webbing lanyard: retro-reflective thread across full body which makes it visibly discernible in dawn and dusky working conditions.

Shock absorber: EP125 shock absorber regulates deceleration when the end of rope is reached on free fall. (Refer to instruction manual)

Connectors: 2 units of Rebar, 1 unit of Snap Hook with 25KN rated capacity.

Length of lanyard: 2 Mtr. from one end connector eye to the other, width: 30mm

Material: 100% polyester webbing



Description

Shock Absorber lanyard 2 Mtr. | visibility color | Webbing width 30mm | Two Scaffolding hooks | One Snap Hook connector | 100% Polyester

Model	Product Description	Reference	
EP444+EP125	Double Webbing Lanyard With Shock Absorber, 2 Rebar Hook + 1 Karabiner With A Rated Capacity Of 25kn	Connector 1 2 EP51A04	Connector 2 1 EP5204
EP555+EP125	Double Webbing Lanyard With Shock Absorber, 2 Rebar + 1 Snap Hook, With A Rated Capacity Of 25kn	Connector 1 2 EP51A04	Connector 2 1 EP5204

Standard: EN361:2002, EN 355:2002, EN 354, and EN 362:2004