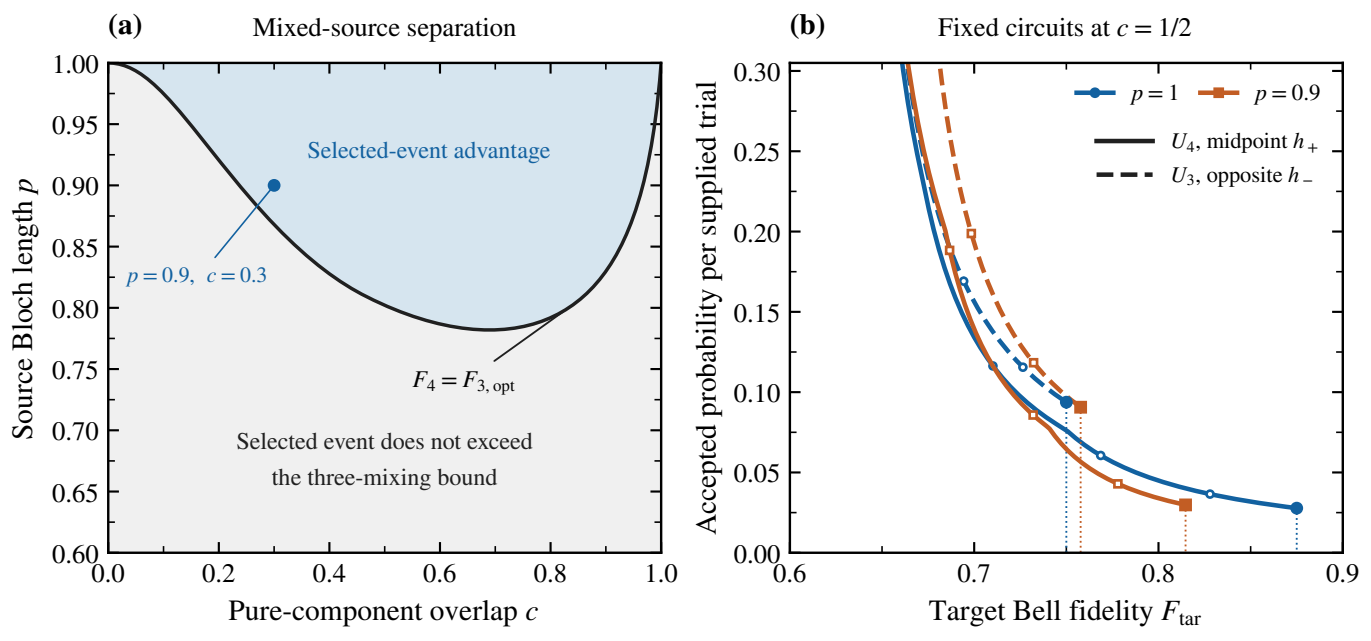
(a)
Mixed-source separation
Selected-event advantage
$p = 0.9,\ c = 0.3$
$F_4 = F_{3,\mathrm{opt}}$
Selected event does not exceed
the three-mixing bound
Source Bloch length p
Pure-component overlap c
1.00
0.95
0.90
0.85
0.80
0.75
0.70
0.65
0.60
0.0
0.2
0.4
0.6
0.8
1.0
(b)
Fixed circuits at $c = 1/2$
$p = 1$
$p = 0.9$
U_4, midpoint h_+
U_3, opposite h_-
Accepted probability per supplied trial
Target Bell fidelity F_{tar}
0.30
0.25
0.20
0.15
0.10
0.05
0.00
0.6
0.7
0.8
0.9