


Figure 5. Recovery Decision Logic

Recovery switch

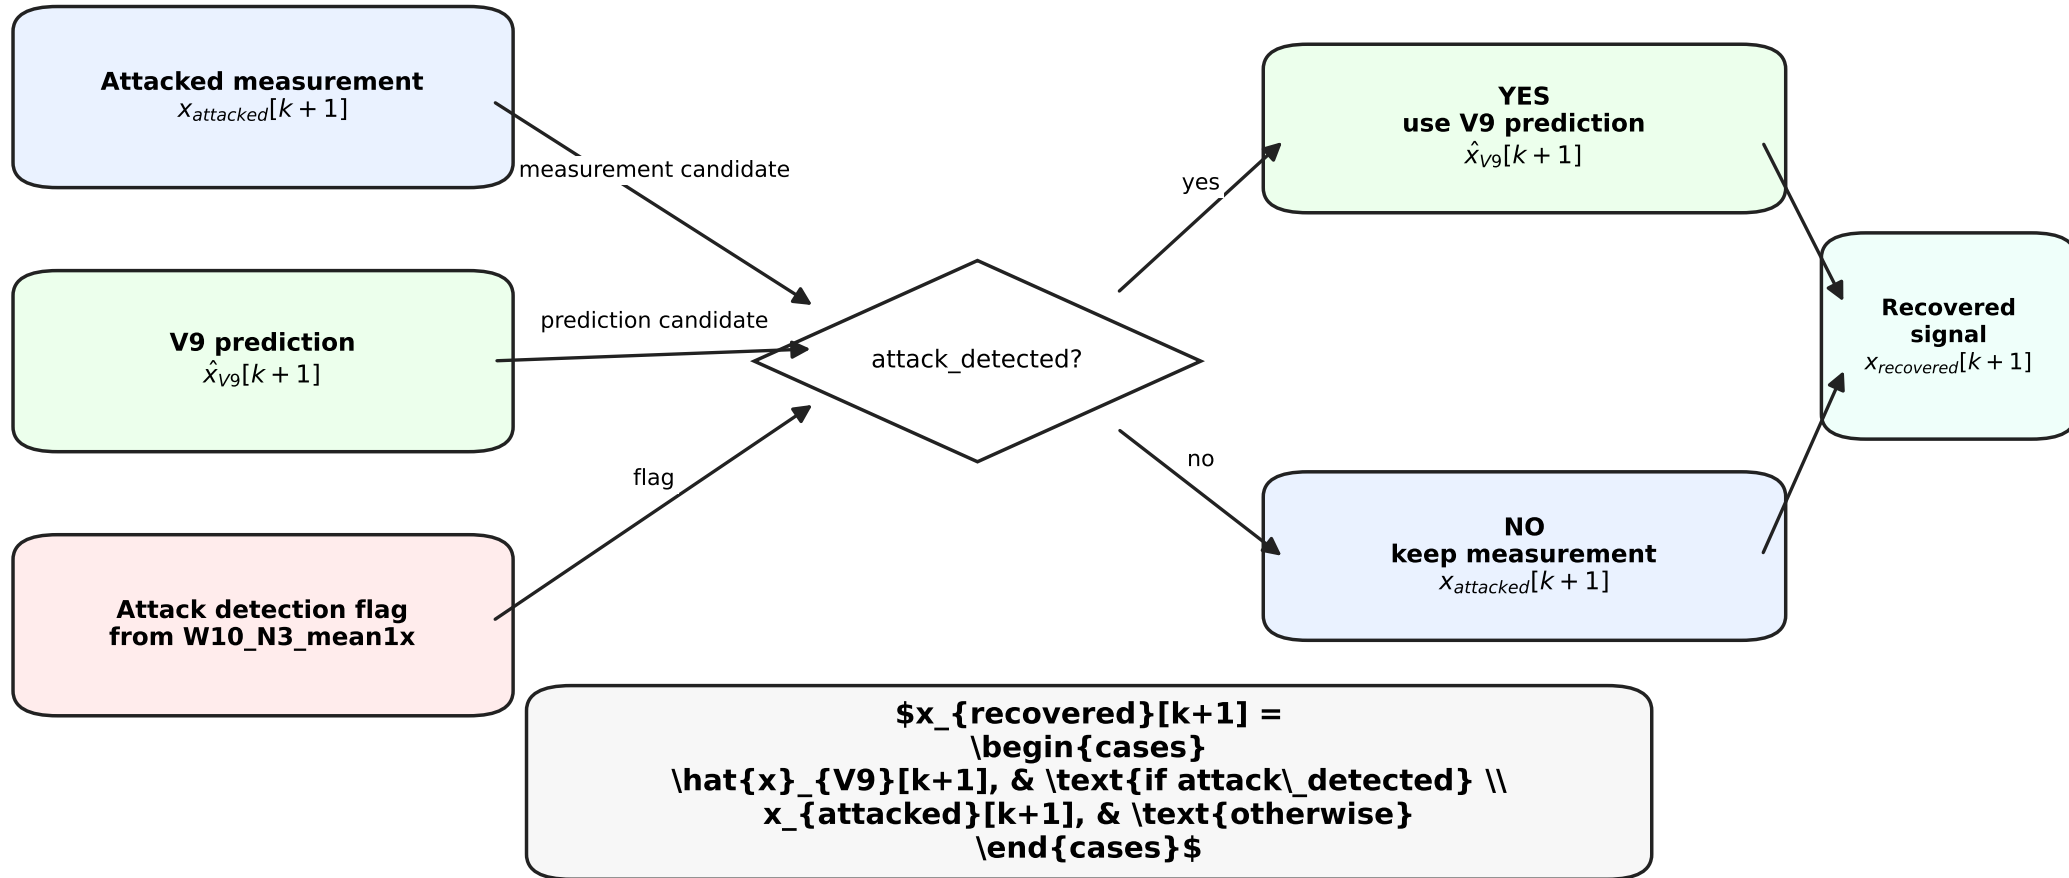

During detected attacks, the corrupted sensor value is replaced by the V9 software-sensor prediction.