
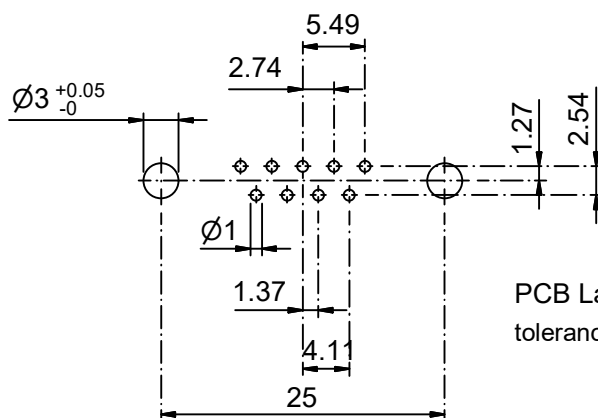
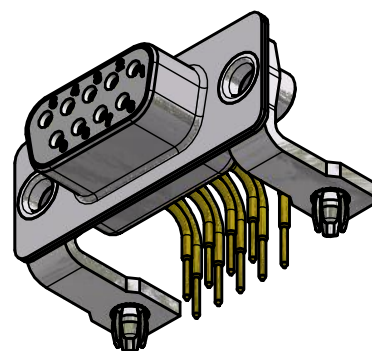
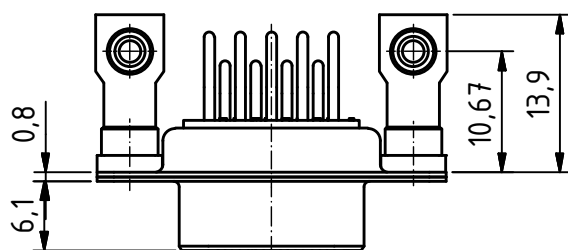
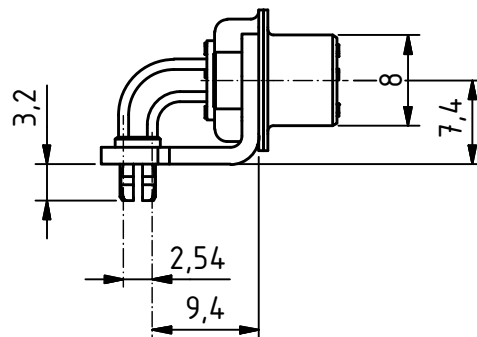


RoHS compliant

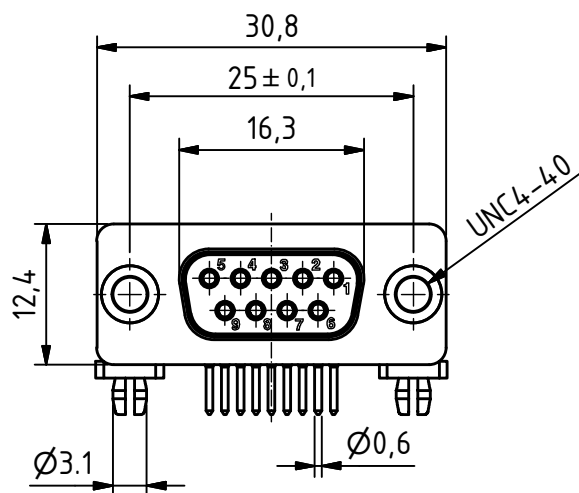

PCB Layout  
tolerances +/-0.1

#### MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel tin plated

#### CHARAKTERISTICS

- Working voltage: 125V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

Product is  
suitable for  
Wave Solder  
Process

General tolerances (Deltron standard)				
size in mm	tolerances			
	> 0.5 up to 3	> 3 up to 6	> 6 up to 30	> 30 up to 120
	±0.1	±0.2	±0.2	±0.3

	All dimensions in mm	Rev.	Rev.	Rev.	DE002743		
		Rev.	Rev.	Rev.	part no.		
DTS09SYC/2M47UN				1.5:1	drawn	18.06.2013	mr
				scale	checked		
					approved		
				K050364			
Industrie Neuhoof 8c CH-3422 Kirchberg <a href="http://www.d-sub.swiss">www.d-sub.swiss</a>				drawing no.			