




KT Lee Wire & Cable

CABLELINK
PREMIUM QUALITY WIRE

• PVC INSULATED CABLES •

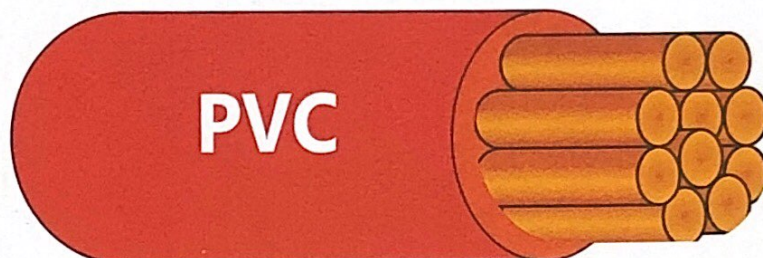

CONSTRUCTION

CONDUCTOR	:	PLAIN ANNEALED COPPER CONDUCTOR
INSULATION	:	PVC
COLOUR OF INSULATION	:	RED, YELLOW, BLUE, GREEN, BLACK AND WHITE
SHEATH	:	PVC
COLOUR OF CORES	:	SINGLE CORE : RED OR BLACK, OTHER COLOURS UPON REQUEST
		TWIN-CORE : RED AND BLACK
		THREE-CORE : RED, YELLOW AND BLUE
		FOUR-CORE : RED, YELLOW, BLUE AND BLACK
COLOUR OF SHEATH	:	BLACK/ WHITE/ RED

PVC-INSULATED, NON-SHEATHED CABLES.

MS 2112 - 4 : 2009

450 / 750 VOLTS

MAXIMUM CONDUCTOR TEMPERATURE 70 °C

Nominal Area of Conductor mm ²	Thickness of Insulation mm	Approx. Overall Diameter (Upper limit) mm	Max. Conductor Resistance at 20°C	Minimum Insulation Resistance at 70 °C MΩ/Km	Approx. Weight Per 100 Meter Kg
			Plain Annealed Copper Ω/Km		
1.5	0.7	3.3	12.10	0.0110	2.1
1.5	0.7	3.5	12.10	0.0100	2.1
2.5	0.8	3.9	7.41	0.0100	3.3
2.5	0.8	4.2	7.41	0.0090	3.2
4	0.8	4.8	4.61	0.0077	4.9
6	0.8	5.4	3.08	0.0065	6.9
6	1.0	6.8	1.83	0.0065	11.6
10	1.0	8.0	1.15	0.0050	17.9
16	1.2	9.8	0.727	0.0050	28.0
25	1.2	11.0	0.524	0.0040	37.5
35	1.4	13.0	0.387	0.0045	50.5
50	1.4	15.0	0.268	0.0035	71.5
70	1.6	17.0	0.193	0.0035	98.5
95	1.6	19.0	0.153	0.0032	122.0
120	1.8	21.0	0.124	0.0032	150.5
150	2.0	23.5	0.0991	0.0032	188.5
185	2.2	26.5	0.0754	0.0032	246.0
240	2.4	29.5	0.0601	0.0030	307.5
300	-	-	-	-	-