



# Precision transport | complete


Fidelity: cosine  $\geq 0.95$  and relative error  $\leq 0.20$

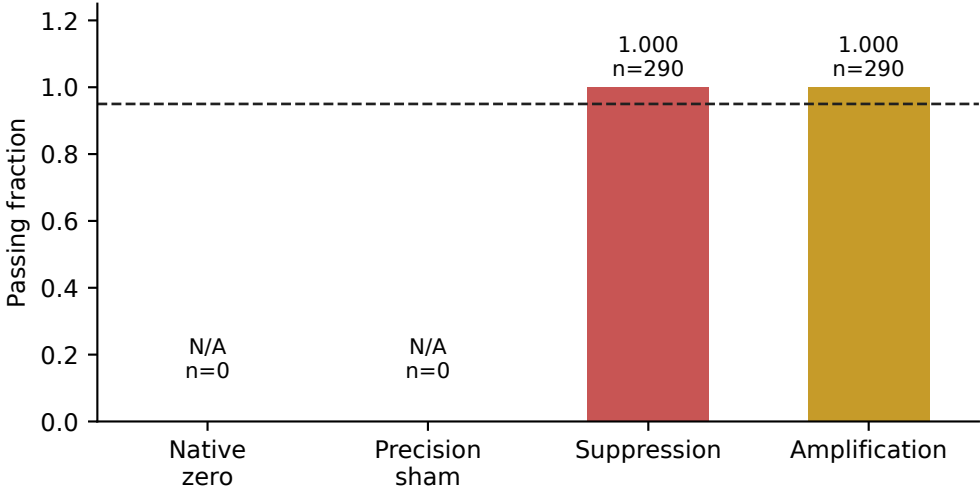


Norm: realized / clean  $\leq 0.05$

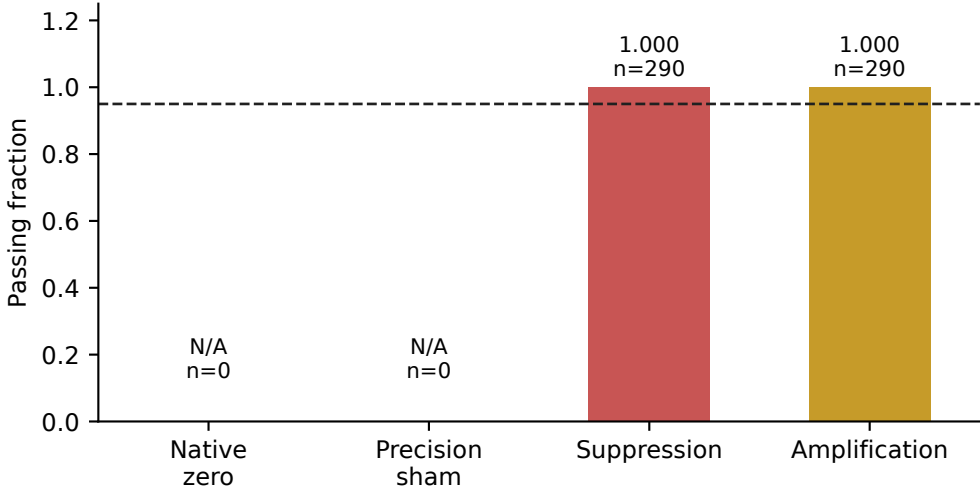

Paired NLL difference: mode minus reference

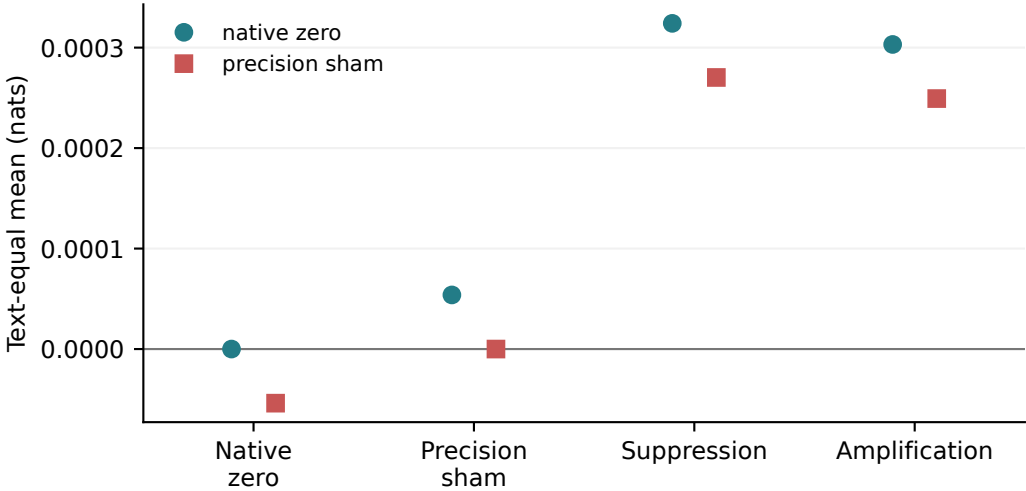

Recorded directional KL: reference to mode

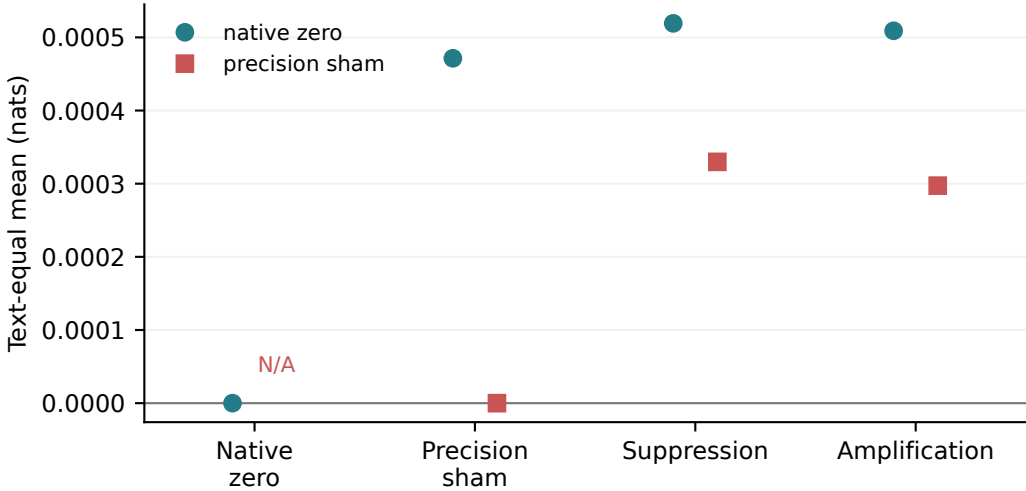

Fidelity denominator: nonzero requests. Norm denominator: nonzero realized edits. Dashed reference: 0.95.  
NLL/KL use paired nonspecial scored tokens, then equal text weights. Unrecorded reverse KL is N/A.  
Audited pilot rows: 48; observed row files: 48. No global qualification; no inferential intervals.