life.augmented

STM32WBxM wireless modules

Bluetooth® Low Energy 5.4, Zigbee 3.0, and Thread

STM32

The STM32 portfolio

Five product categories

Wireless MCU

Short- and long-range connectivity

Ultra-low-power MCU

Mainstream MCU

High-performance MCU

32-bit general-purpose microcontrollers: from 75 to 3,224 CoreMark score

Embedded MPU

32- and 64-bit microprocessors





Enabling edge AI solutions

Scalable security

MPU portfolio

MCU portfolio

Choose the STM32WB series
7 keys points that make a difference

matter

Bluetooth®

OPENTHREAD
released by Google

zigbee

Open 2.4 GHz radio
Multi-protocol

Dual-core / Full control
Ultra-low-power

IoT Protection ready

Massive integration
Cost saving



A large offer

STM32 Cube

STM32 CubeMonitor-RF

Advanced RF tool, Energy control with C code generation

LONGEVITY 10 YEARS COMMITMENT

No matter what!

life.augmented

STM32WB MCU provides a large offering

Bluetooth® Low Energy 5.4, OpenThread, Zigbee 3.0 and proprietary protocol capable

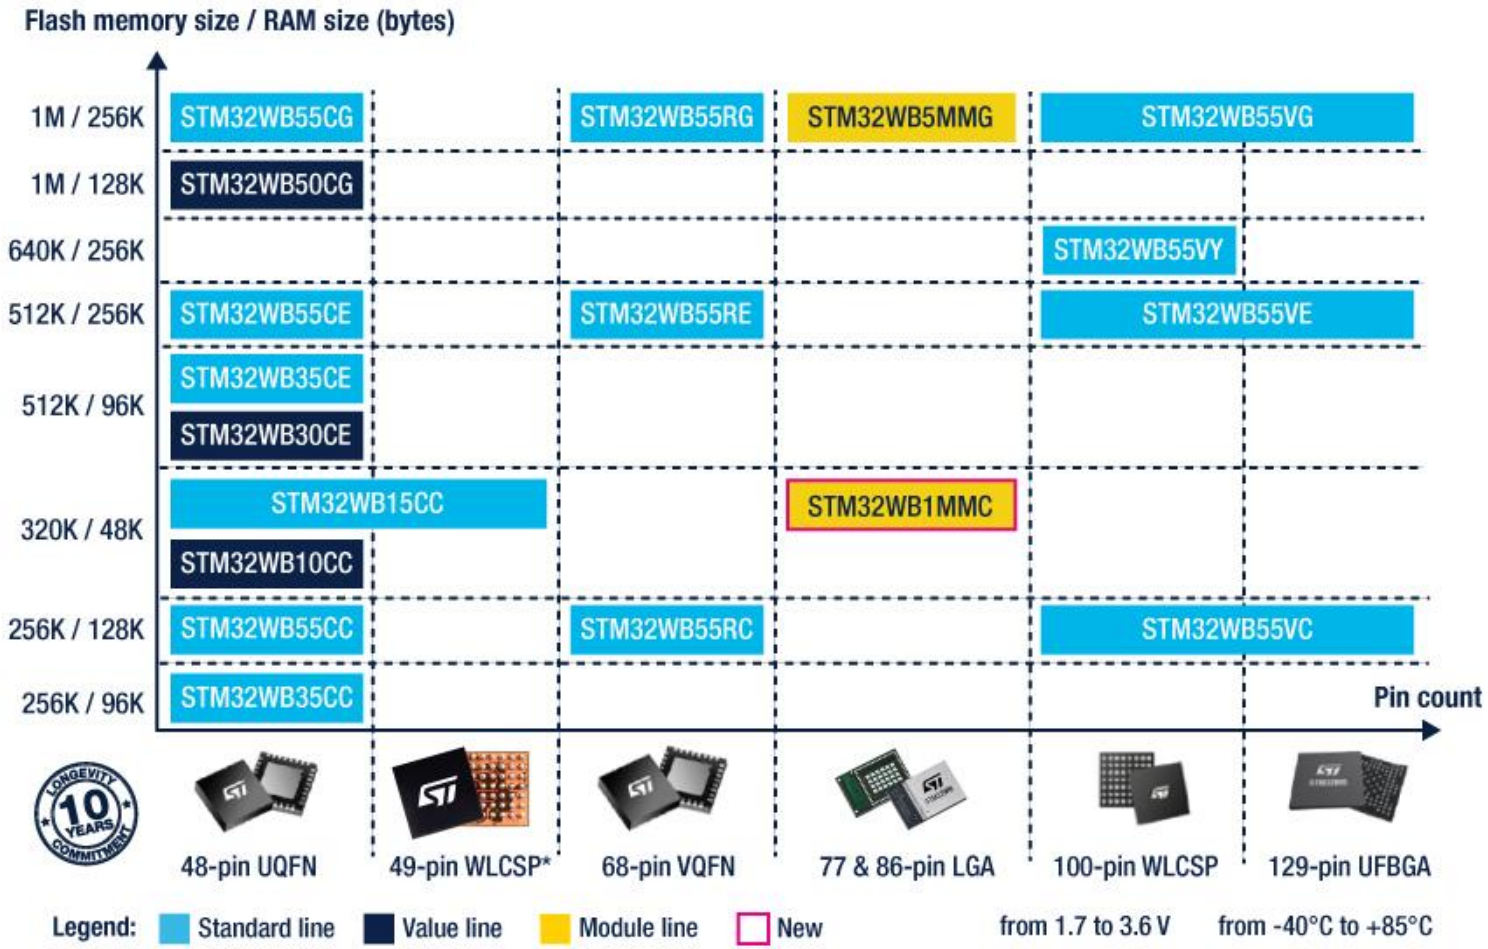

life.augmented

STM32WBxM module portfolio

Easy deliver BLE applications

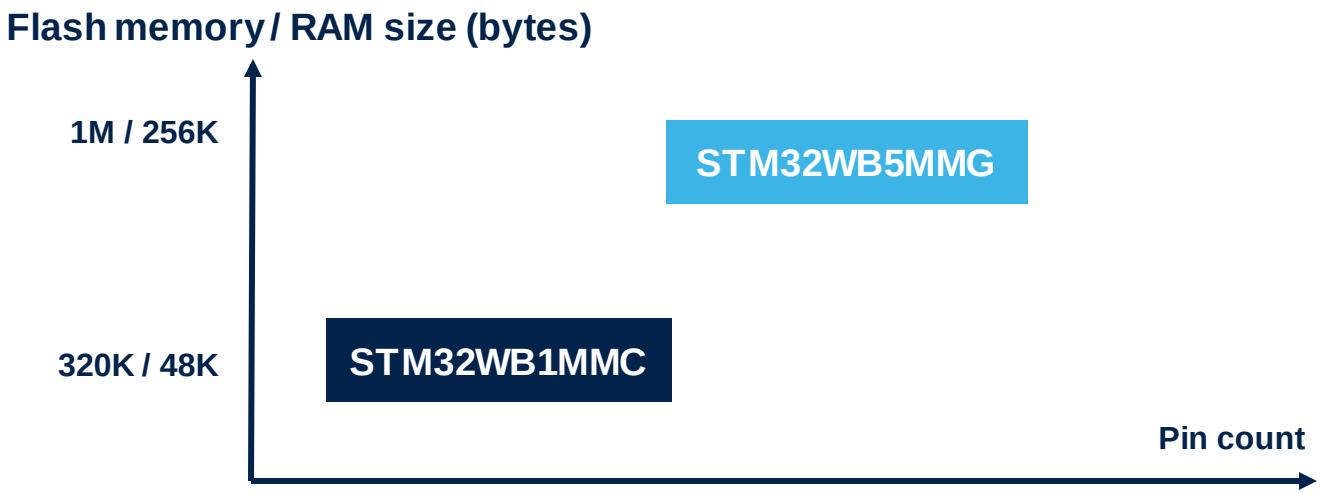

77-pin LGA
6.5 x 10 mm
0.45 mm pitch



86-pin LGA
7.3 x 11 mm
0.435 mm pitch

from 1.7 V to 3.6 V
from -40°C to +85°C

Latest product generation

life.augmented

Available as a module to reduce your time to market

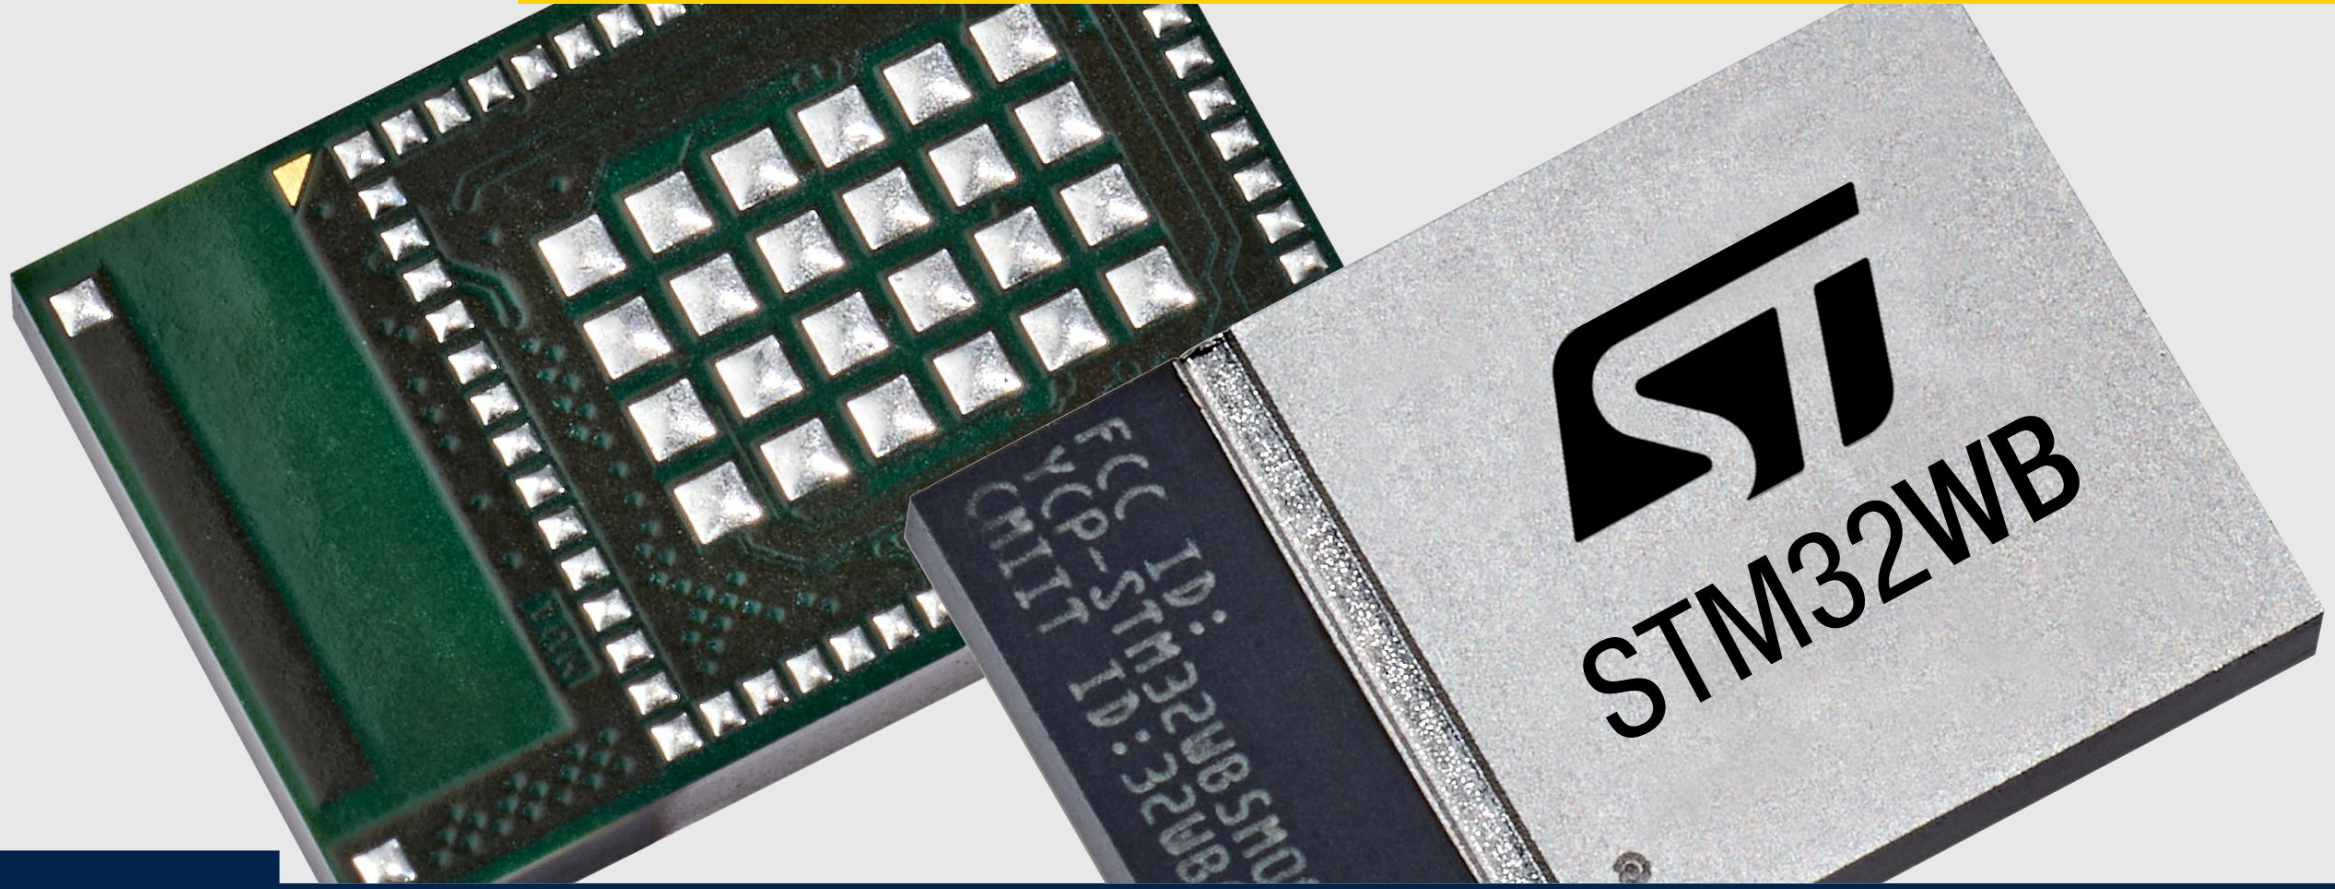

life.augmented

STM32WB5MMG module

Easy to integrate - smooth certification process for developers

Key advantages

- WLCSP100 package integrated
- Maximum of features exposed
- Low-cost PCB for the mother board
- No RF expertise

Watch the video

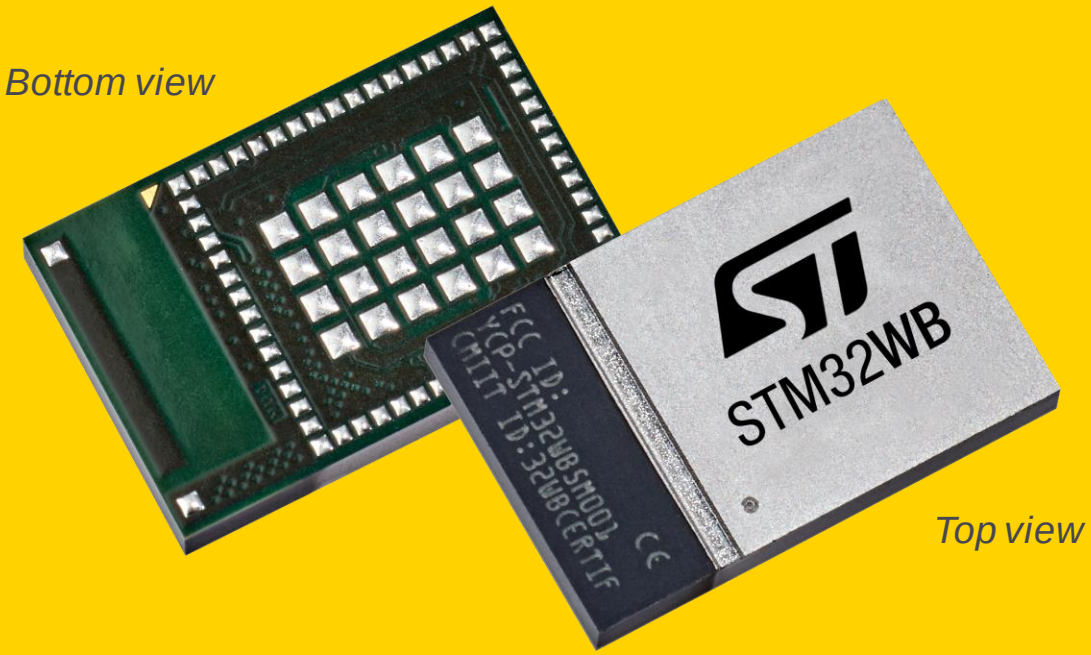

life.augmented

STM32WB5MMG multi-protocol module

Small form factor

7.3 x 11 mm

Full reference design up to antenna, crystals

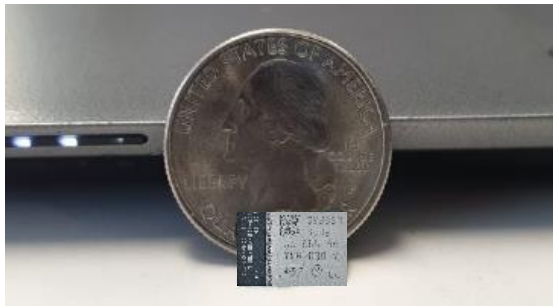

Reduce the cost

Down to 2 PCB layers

Everything inside (single cap outside)

Free of charge radio stack

Certified FCC, CE, NCC, JRF, KC, SRRC, ISED, GOST

Multi-protocols

Bluetooth®

zigbee

OPENTHREAD

matter

+ Concurrent modes & Proprietary 2.4GHz

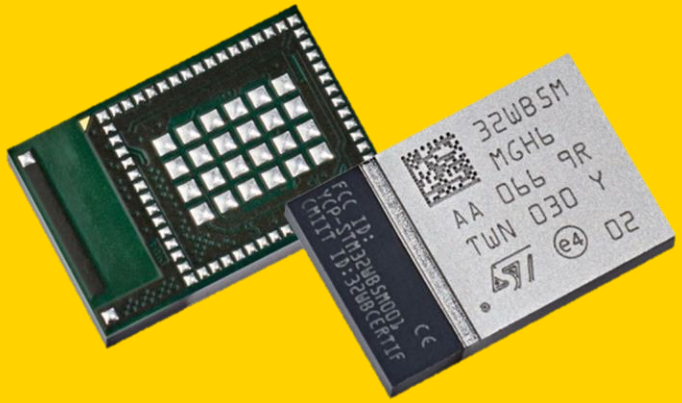

RPN : STM32WB5MMGH6TR

Rich feature set

Dual core* based

1 Mbyte flash memory
256 KBytes of RAM

LCD, USB FS, ADC, COMP

Security

OTA (application, radio)

Discovery kit

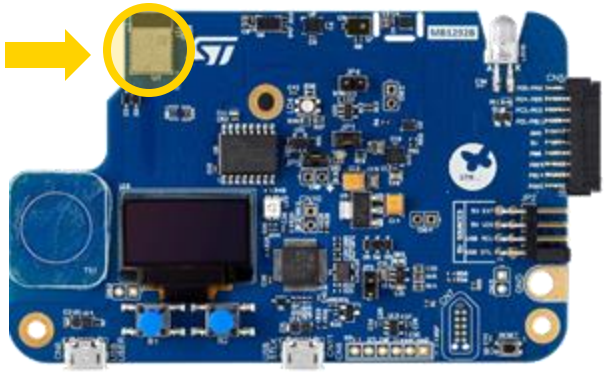

STM32 ecosystem

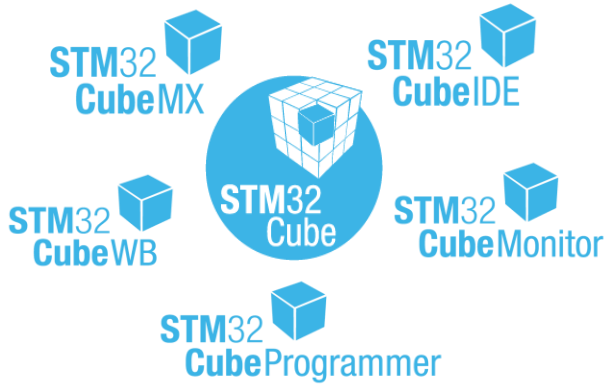

*Dual Core: One core dedicated to Radio and protocols stack and One core dedicated for application

Prototyping made as easy as 1,2,3

STM32WB5MM-DK

Hardware
discovery kit

STM32**WB**

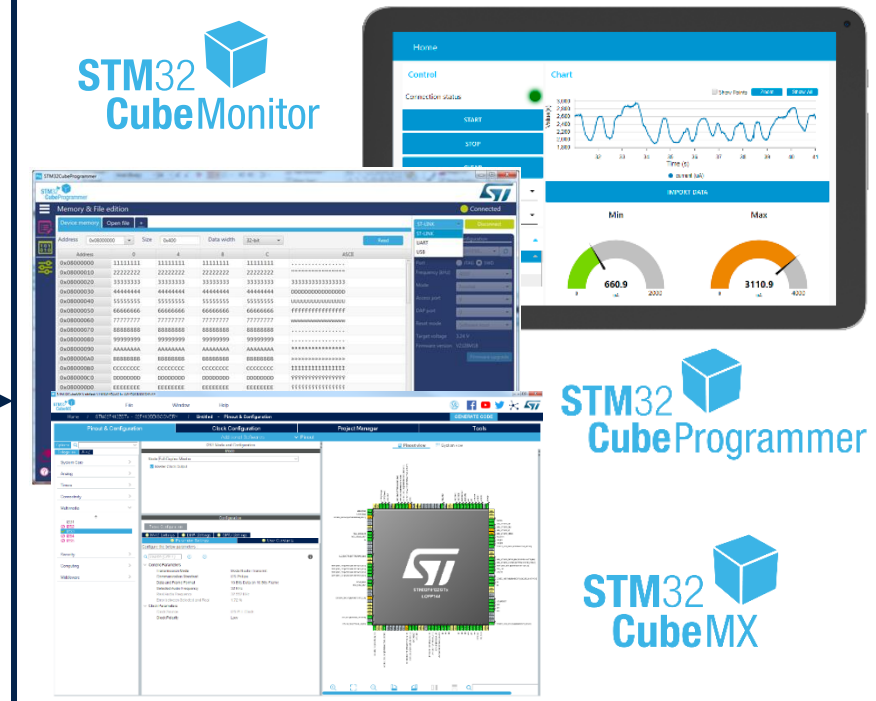

STM32
Cube

STM32CubeMX/STM32CubeWB/
STM32CubeProg & STM32CubeMonRF
Code generation
Power calculation

life.augmented

STM32WB5MM-DK

Watch the video

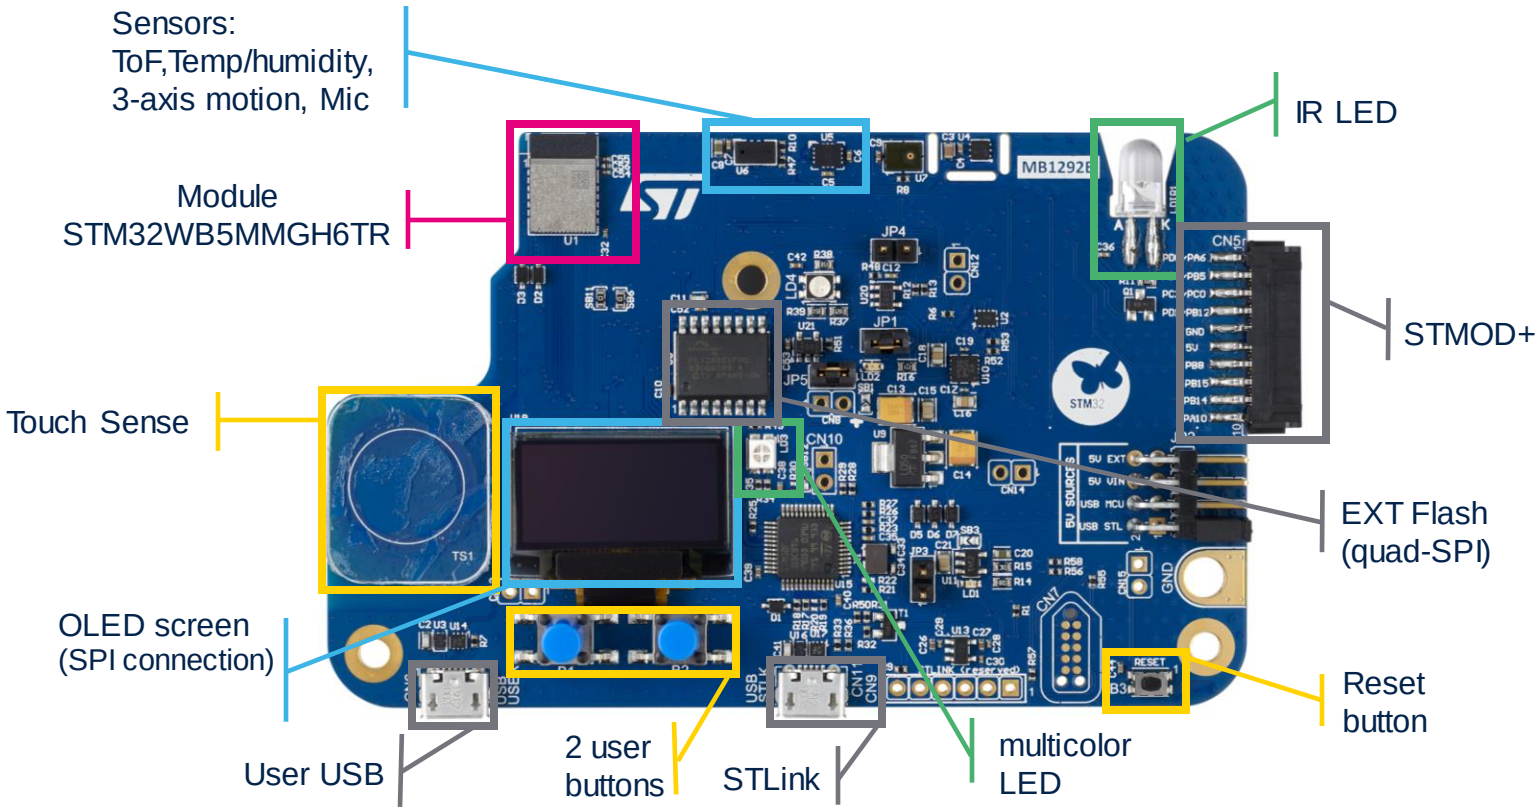

Top view

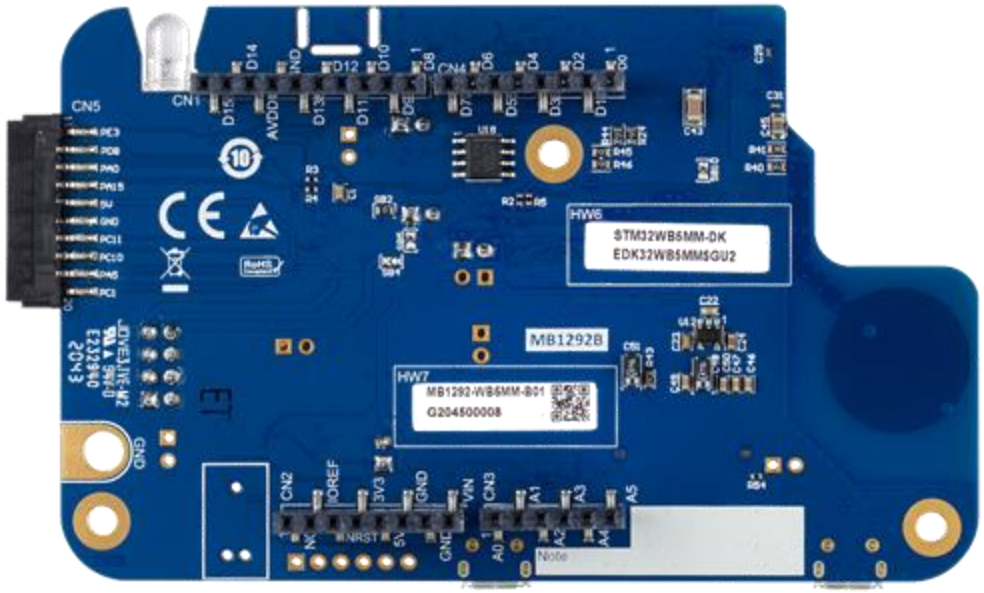

Bottom view
(ARDUINO connectors)

STM32WB1M module

Bluetooth LE Module Solution

Dual Core

RF Filter

Antenna

XTAL + passive

Control
- Power supply 1.71V to 3.6V w/ DC/DC POR/PDR/PVD/BOR
- Internal 32KHz RC oscillators 0,1 – 48 MHz 16 MHz (HSI)
- RTC / AWU / CSS
- SysTick timer
- 2 watchdogs (WWDG / IWDG)
- Cyclic Redundancy Check
- Voltage scaling

Analog
- 1x ULP comparator
- 1x 12-bit ADC 2.5Msps
- Temperature sensor

Sensing
- 8-keys Capacitive touch

ARM Cortex-M4 FPU/DSP 64MHz
- Nested Vector Interrupt Controller (NVIC)
- Memory Protected Unit (MPU)
- JTAG / SW debug

ART Accelerator™

AHB Bus Matrix

1x DMA 7channels

Multi-Protocol Radio
- Bluetooth™ LE 5.3
- AES 256-bit

ARM Cortex-M0+ MPU 32MHz
- Nested Vector Interrupt Controller (NVIC)
- SW debug

Memory
- 320KB Flash
- 48KB SRAM
- BOOT ROM
- Secure boot loader

Connectivity
- 1x SPI, 1x I²C
- 1x USART ISO7816, smartcard, IrDA, Modem control
- 1x ULP UART

Control
- 1x 16-bit + 1x 32-bit timers
- 2x ULP 16-bit timers

Security
- AES 256-bit / PKA / TRNG PCROP / FUS

Option for external antenna

RF Filter

Internal Antenna

Passives

32KHz XTAL

27 GPIOs

32MHz XTAL

Flash memory / RAM size (bytes)

320K / 48K

STM32WB1MMC

Pin count

77-pin LGA

from 1.7 V to 3.6 V
from -40°C to +85°C

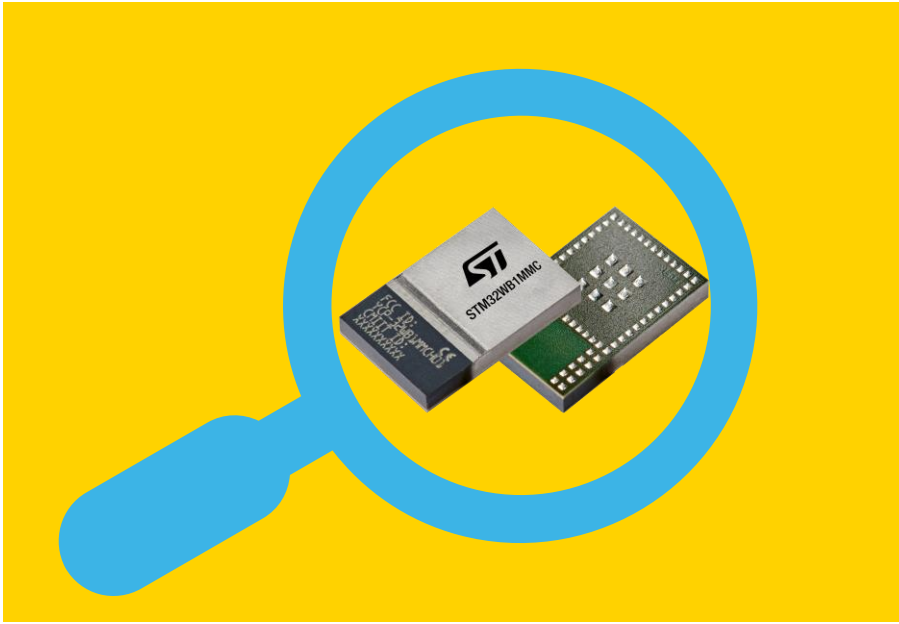

STM32WB1M module

Small form factor

6.5 x 10 mm

Everything inside (antenna, crystals…)

Option:
internal or external antenna

Extended Battery life

DCDC configuration

Standby ultra-low-power mode while radio activities

Reduce costs

Down to 2 PCB layers

Everything inside (single cap outside)

Free radio stack

Certifications FCC, CE, NCC, JRF, KC, SRRC, ISED

Bluetooth® Low Energy protocol

Bluetooth®

Proprietary 2.4GHz

Rich feature set

Dual core* based

320 Kbytes flash
48 Kbytes RAM

ADC, COMP, TSC

Security

OTA (application, radio)

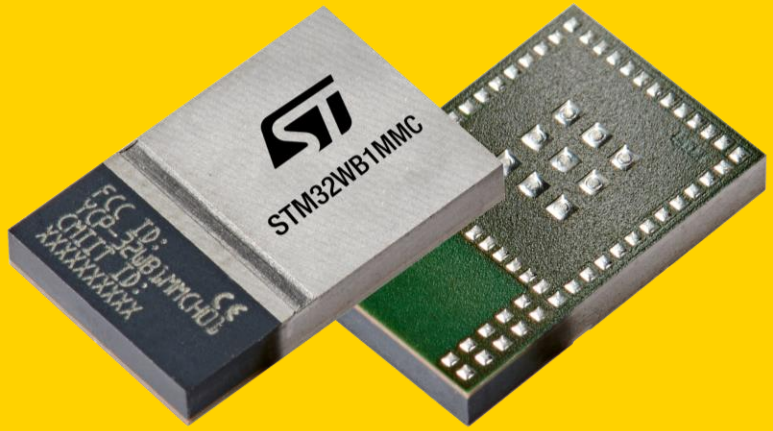

RPN: STM32WB1MMCH6

Connectivity expansion board

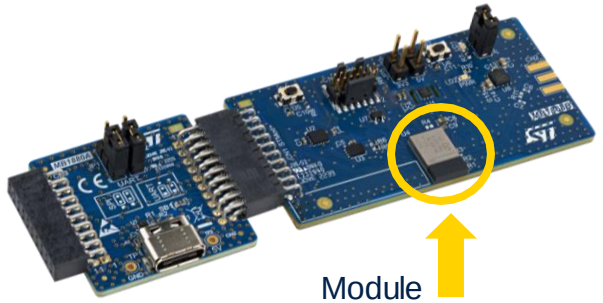

Module
STM32WB1MMCH6

RPN: B-WB1M-WPAN1
SMA connector not assembled by default

STM32 ecosystem

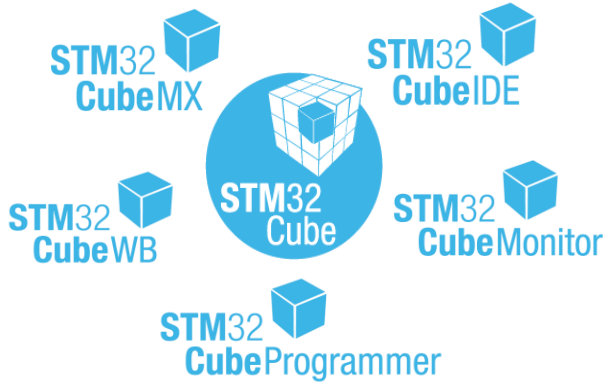

*Dual Core: One core dedicated to Radio and protocols stack and One core dedicated for application

Prototyping made as easy as 1,2,3

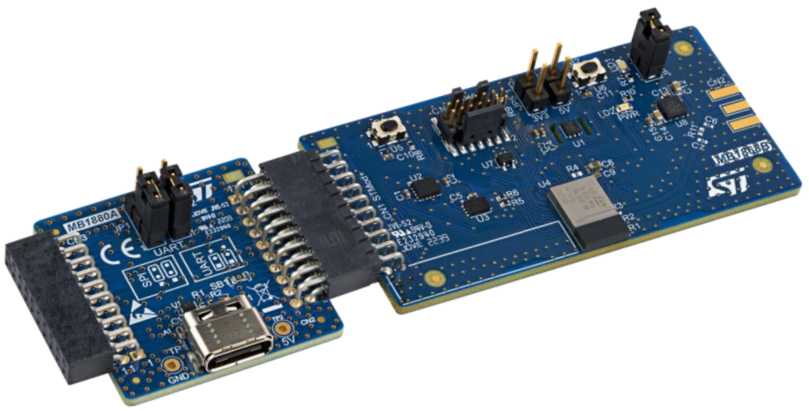

B-WB1M-WPAN1

Hardware
connectivity expansion board

STM32**WB**

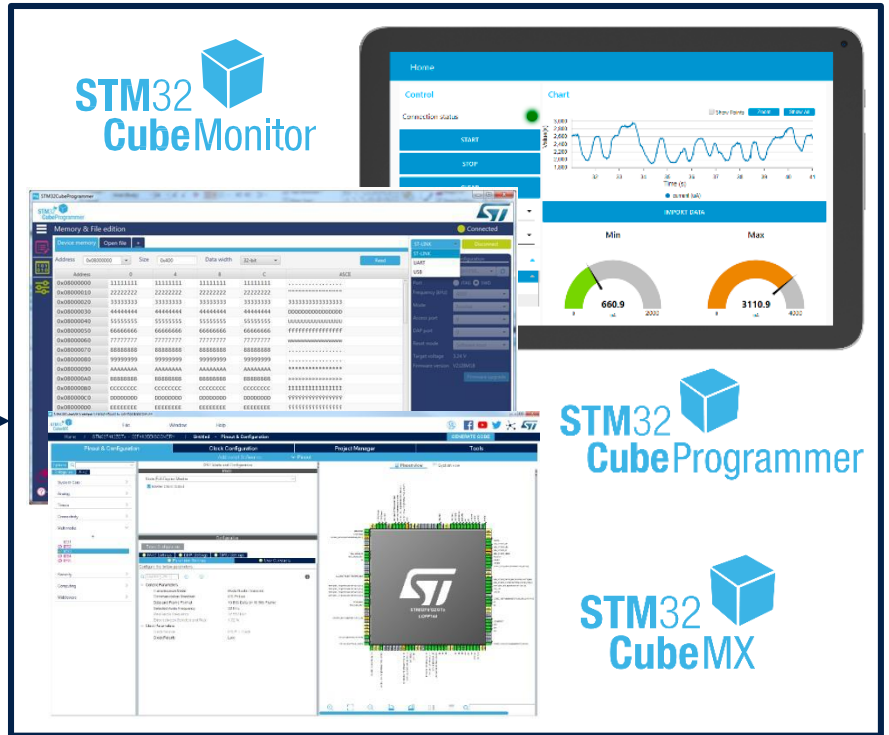

STM32CubeMX/STM32CubeWB/
STM32CubeProg & STM32CubeMonitor
Code generation
Power calculation

STM32 Cube

life.augmented

B-WB1M-WPAN1 expansion board

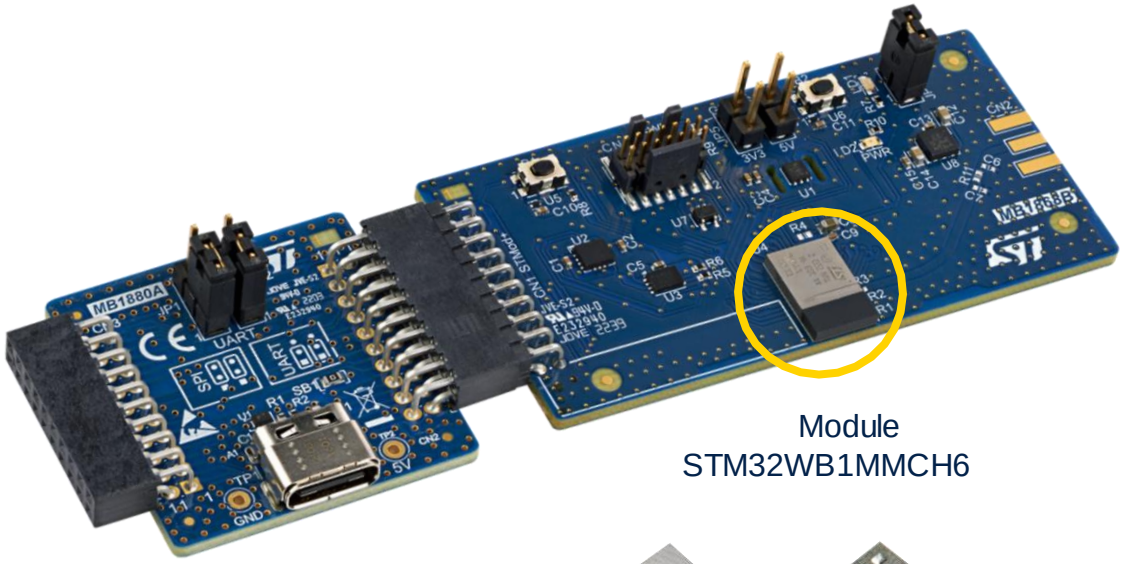

Module
STM32WB1MMCH6

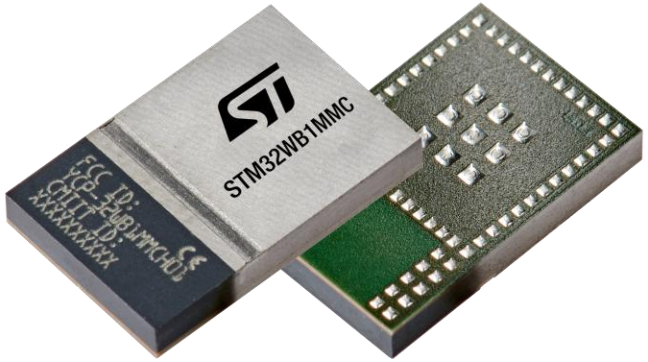

Power supply options:
- From Host through STMOD+ (slave mode)
- From USB type C through STMOD+ adapter (master mode)
- From Battery LiPo type directly connected (master mode)

Boot mode through micro switch

1x User button
1x Reset button
1x LED Blue

Sensors:
- Temperature sensor
- Accelerometer

Connectors:
- STMOD+
- STDC14 receiver
- SMA connector for external antenna connexion opion (not assembled by default)

Additionnal features:
Adapter board female-female STMOD+ (B_STMOD_FEM), provided with CEB
Power consumption measurement capability through jumper

life.augmented

Software tools for STM32WBxM modules

A complete design journey, from configuration to application monitoring

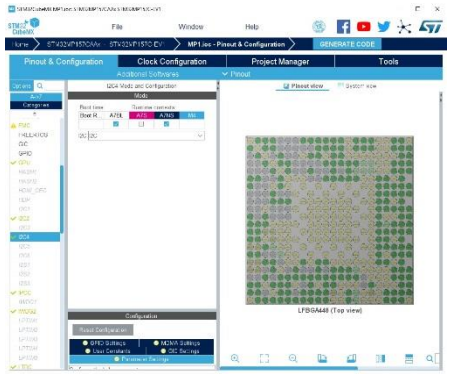

STM32 CubeMX

STM32 CubeIDE

arm KEIL

iar

eclipse

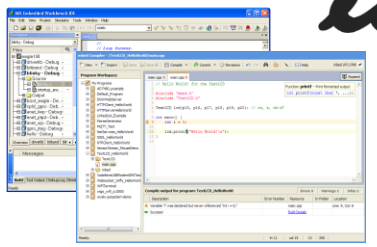

STM32 CubeProgrammer

STM32 CubeMonitor

STM32CubeMX

Graphical tool for easy configuration

- Configure and generate code
- Peripherals and middleware configuration

IDEs
Compile and debug

Simple, powerful solutions

- Partners IDE (Arm® Keil®) FREE
- IDE based on Eclipse FREE
- RTOS aware debug

STM32 programming & monitoring tools

STM32CubeProg
STM32CubeMonitor

- Device and memory configuration
- Program the application
- Monitor variables at runtime

life.augmented

Releasing your creativity

/STM32

@ST_World

community.st.com

www.st.com/STM32WB

wiki.st.com/stm32mcu

github.com/STMicroelectronics

STM32WB online training

STM32WB blog article

MOOC – STM32WB workshop

life.augmented

Our technology starts with You

Find out more at www.st.com/STM32WB

© STMicroelectronics - All rights reserved.
ST logo is a trademark or a registered trademark of STMicroelectronics International NV or its affiliates in the EU and/or other countries.
For additional information about ST trademarks, please refer to www.st.com/trademarks.
All other product or service names are the property of their respective owners.

life.augmented