



Douglas Dart V4 — integrated propulsion with translating inlet shut-off, longitudinal section, to scale, mirrored
body 214.0 mm | capture 39.4 cm² at r 83.5 mm | valve stroke 7.88 mm | seal faying 95 cm² | dump 4.18× | flameholder 29% blockage | boattail 8.00°
outer mould line identical in both valve states — only the sleeve and spar move. Boom, reed valves and flameholder are ASSUMED.

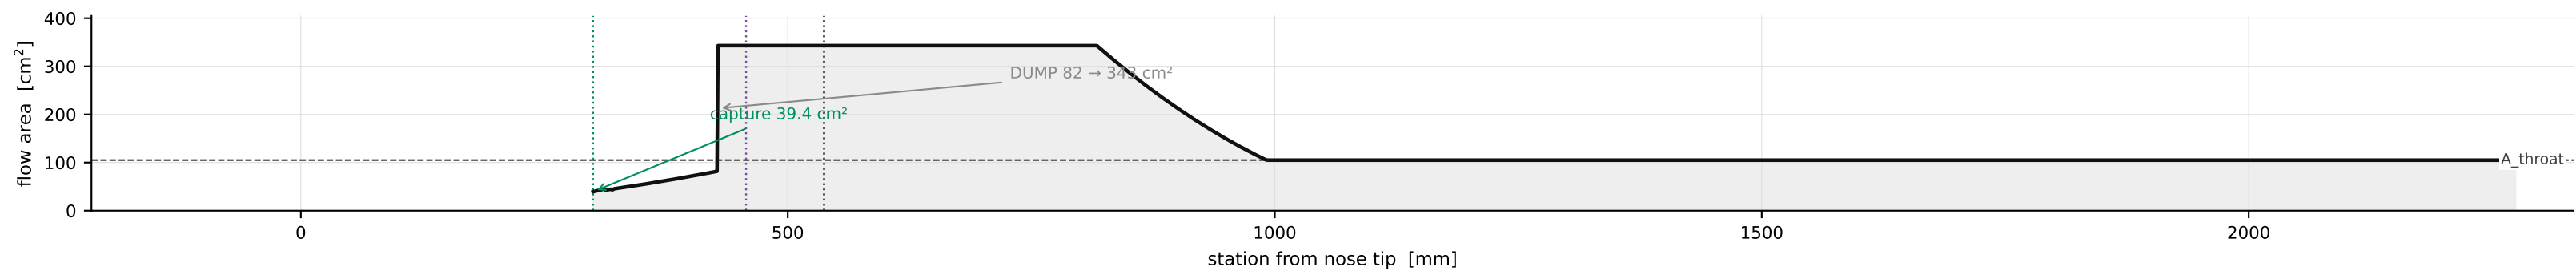

VALVE DETAIL — upper half, to scale

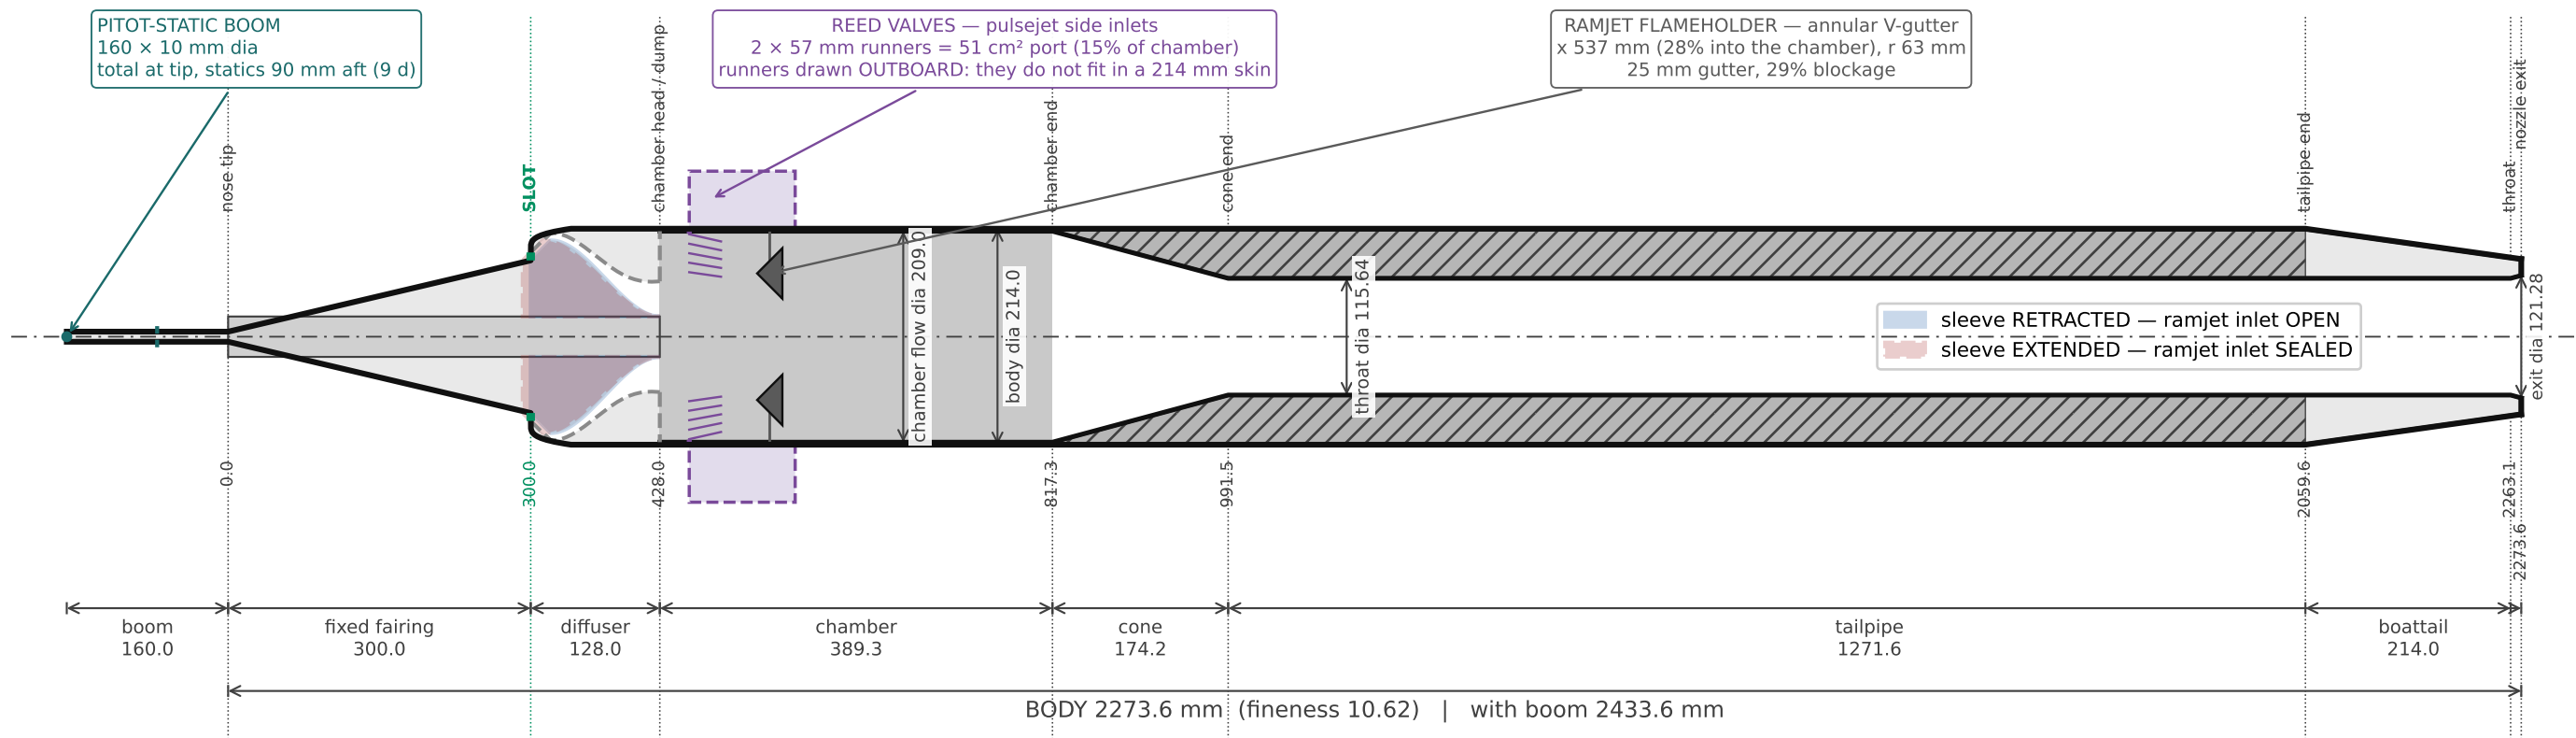