

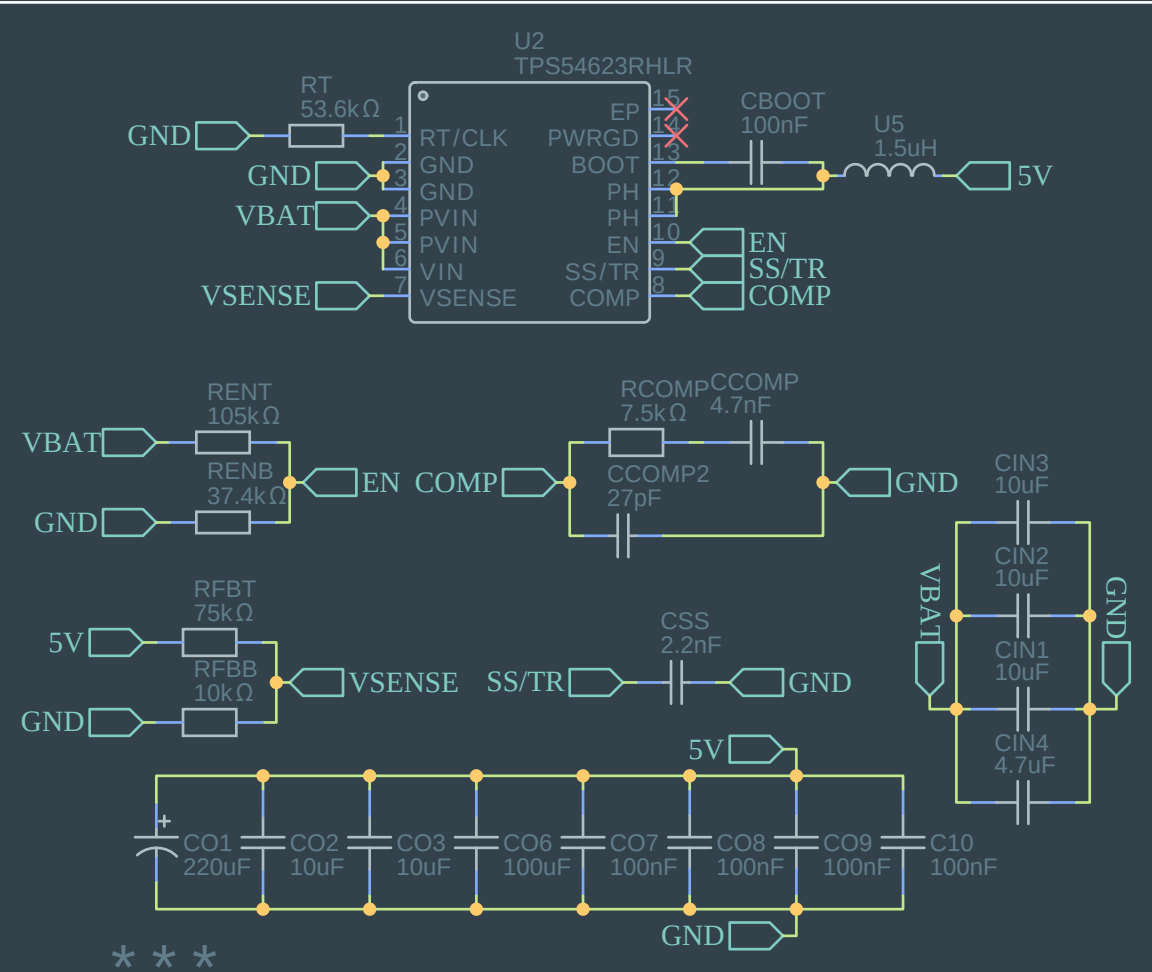


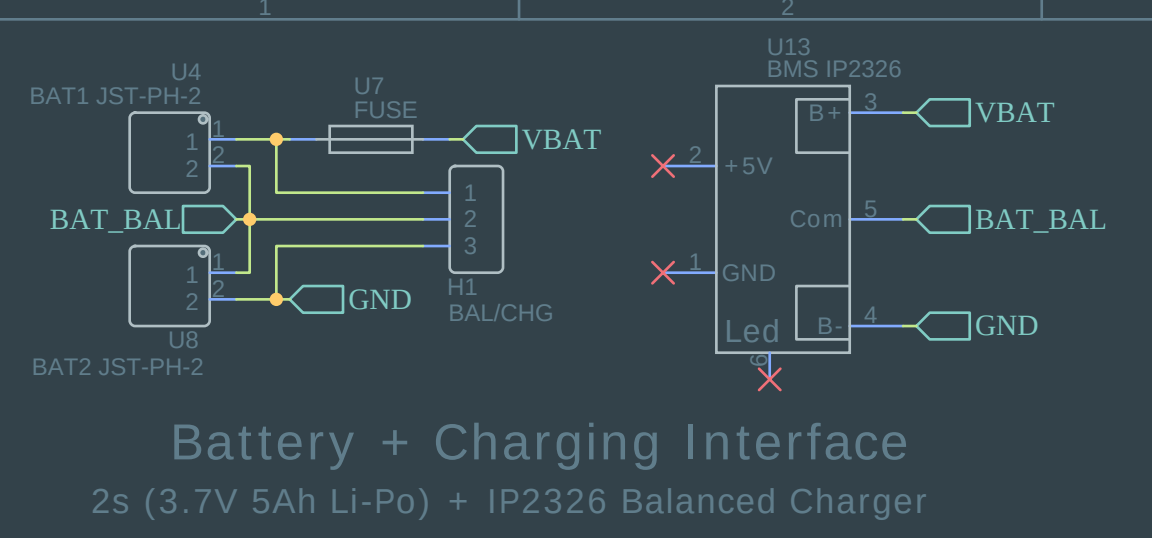






CM4 Power Delivery Circuit

*Creates a 2S configuration from 2 separate batteries that is fused (4A sustained, 8A trip, resettable). Fed to the main voltage regulator (6-9V input, ~5V output), and later to the decoupling network that is made up of various LF/HF filtering ceramic caps and bulk tantalum caps to ensure stability of the 5V rail at all times.

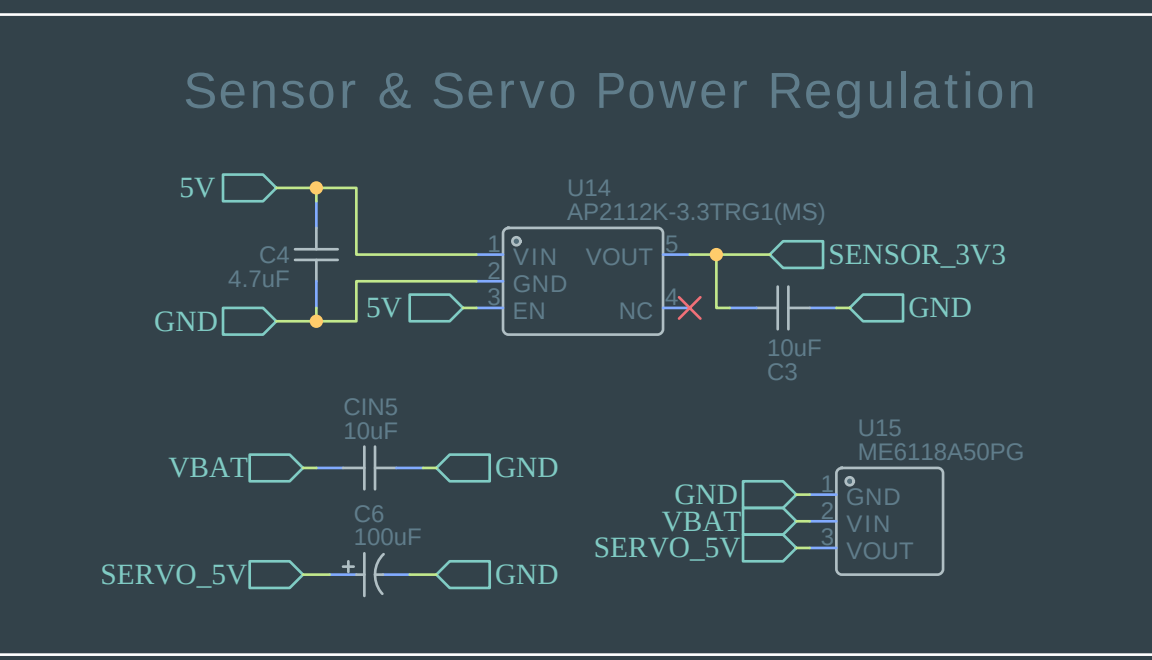

H-BRIDGE Circuit

DRV8833 with 1A limit

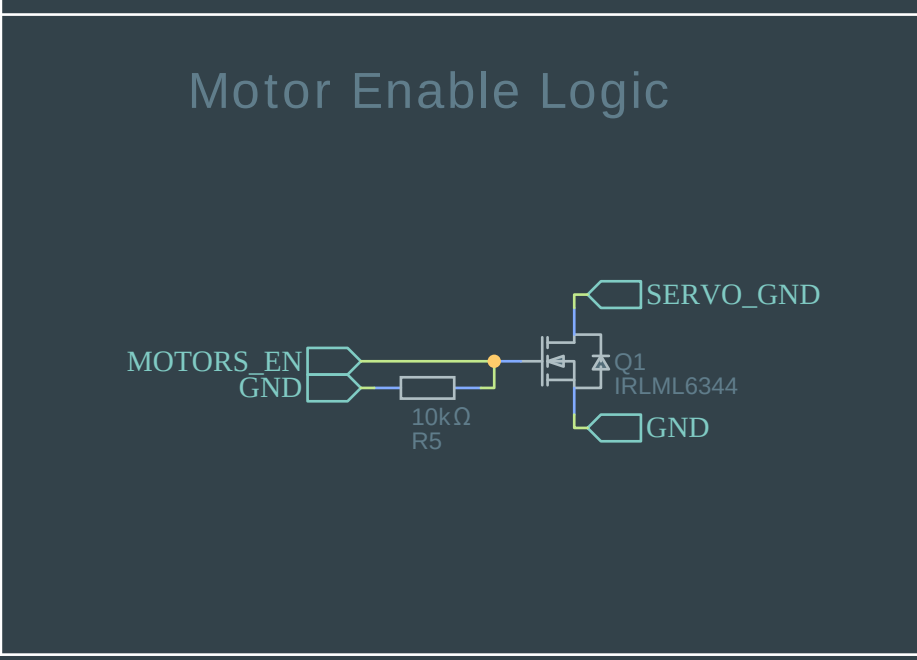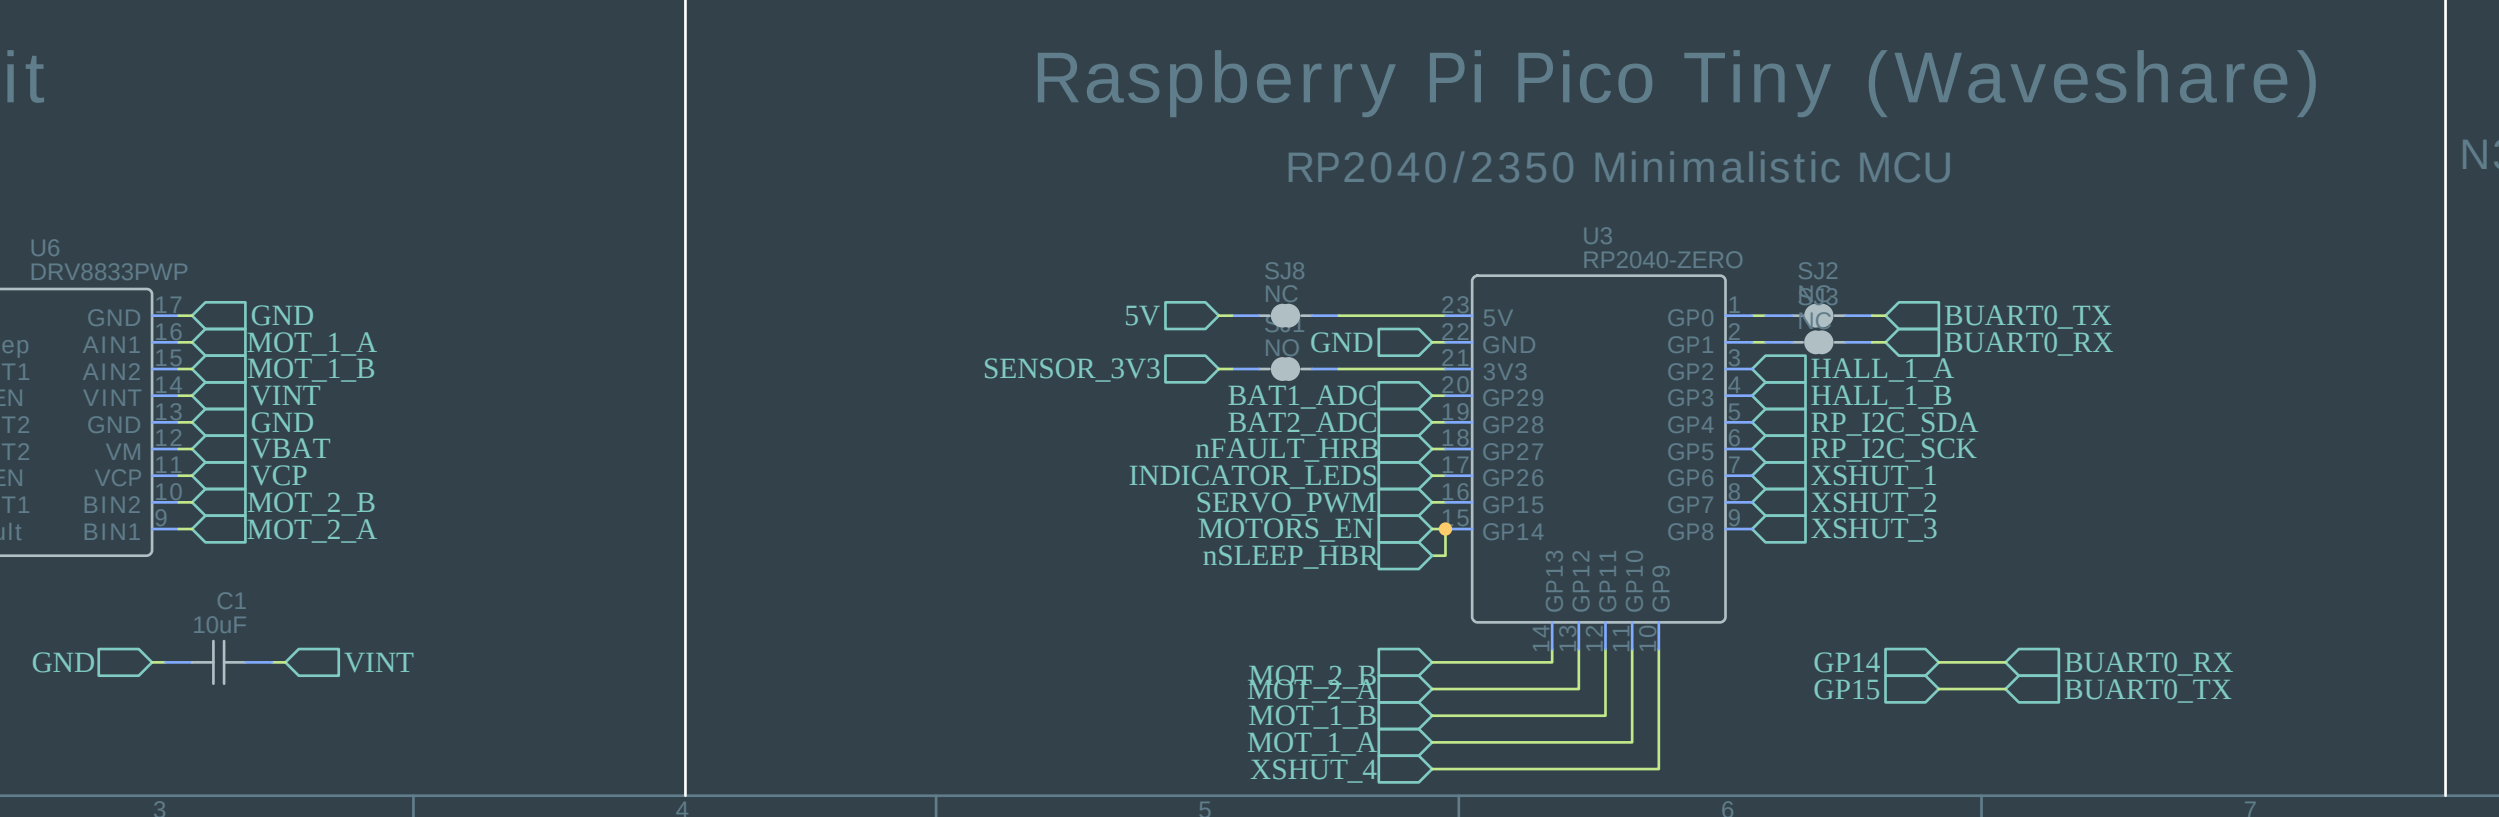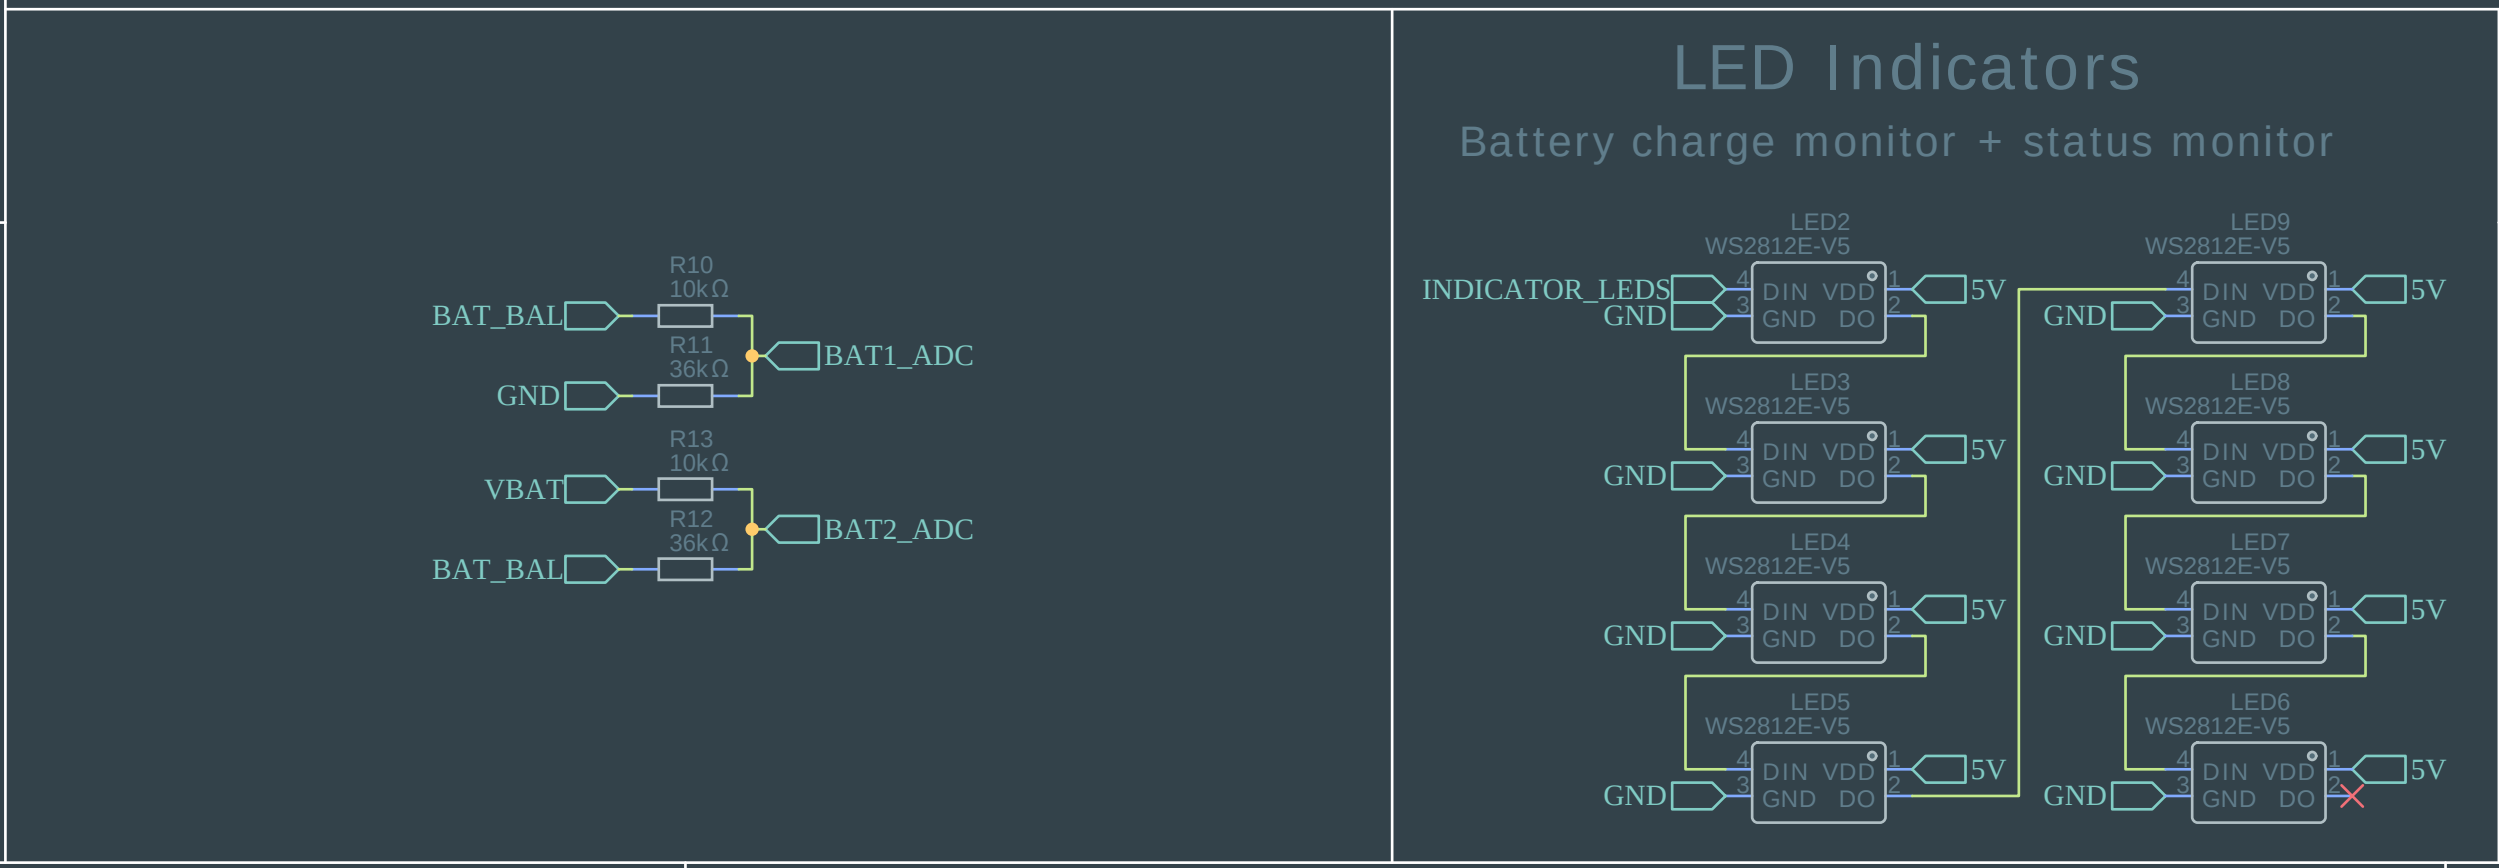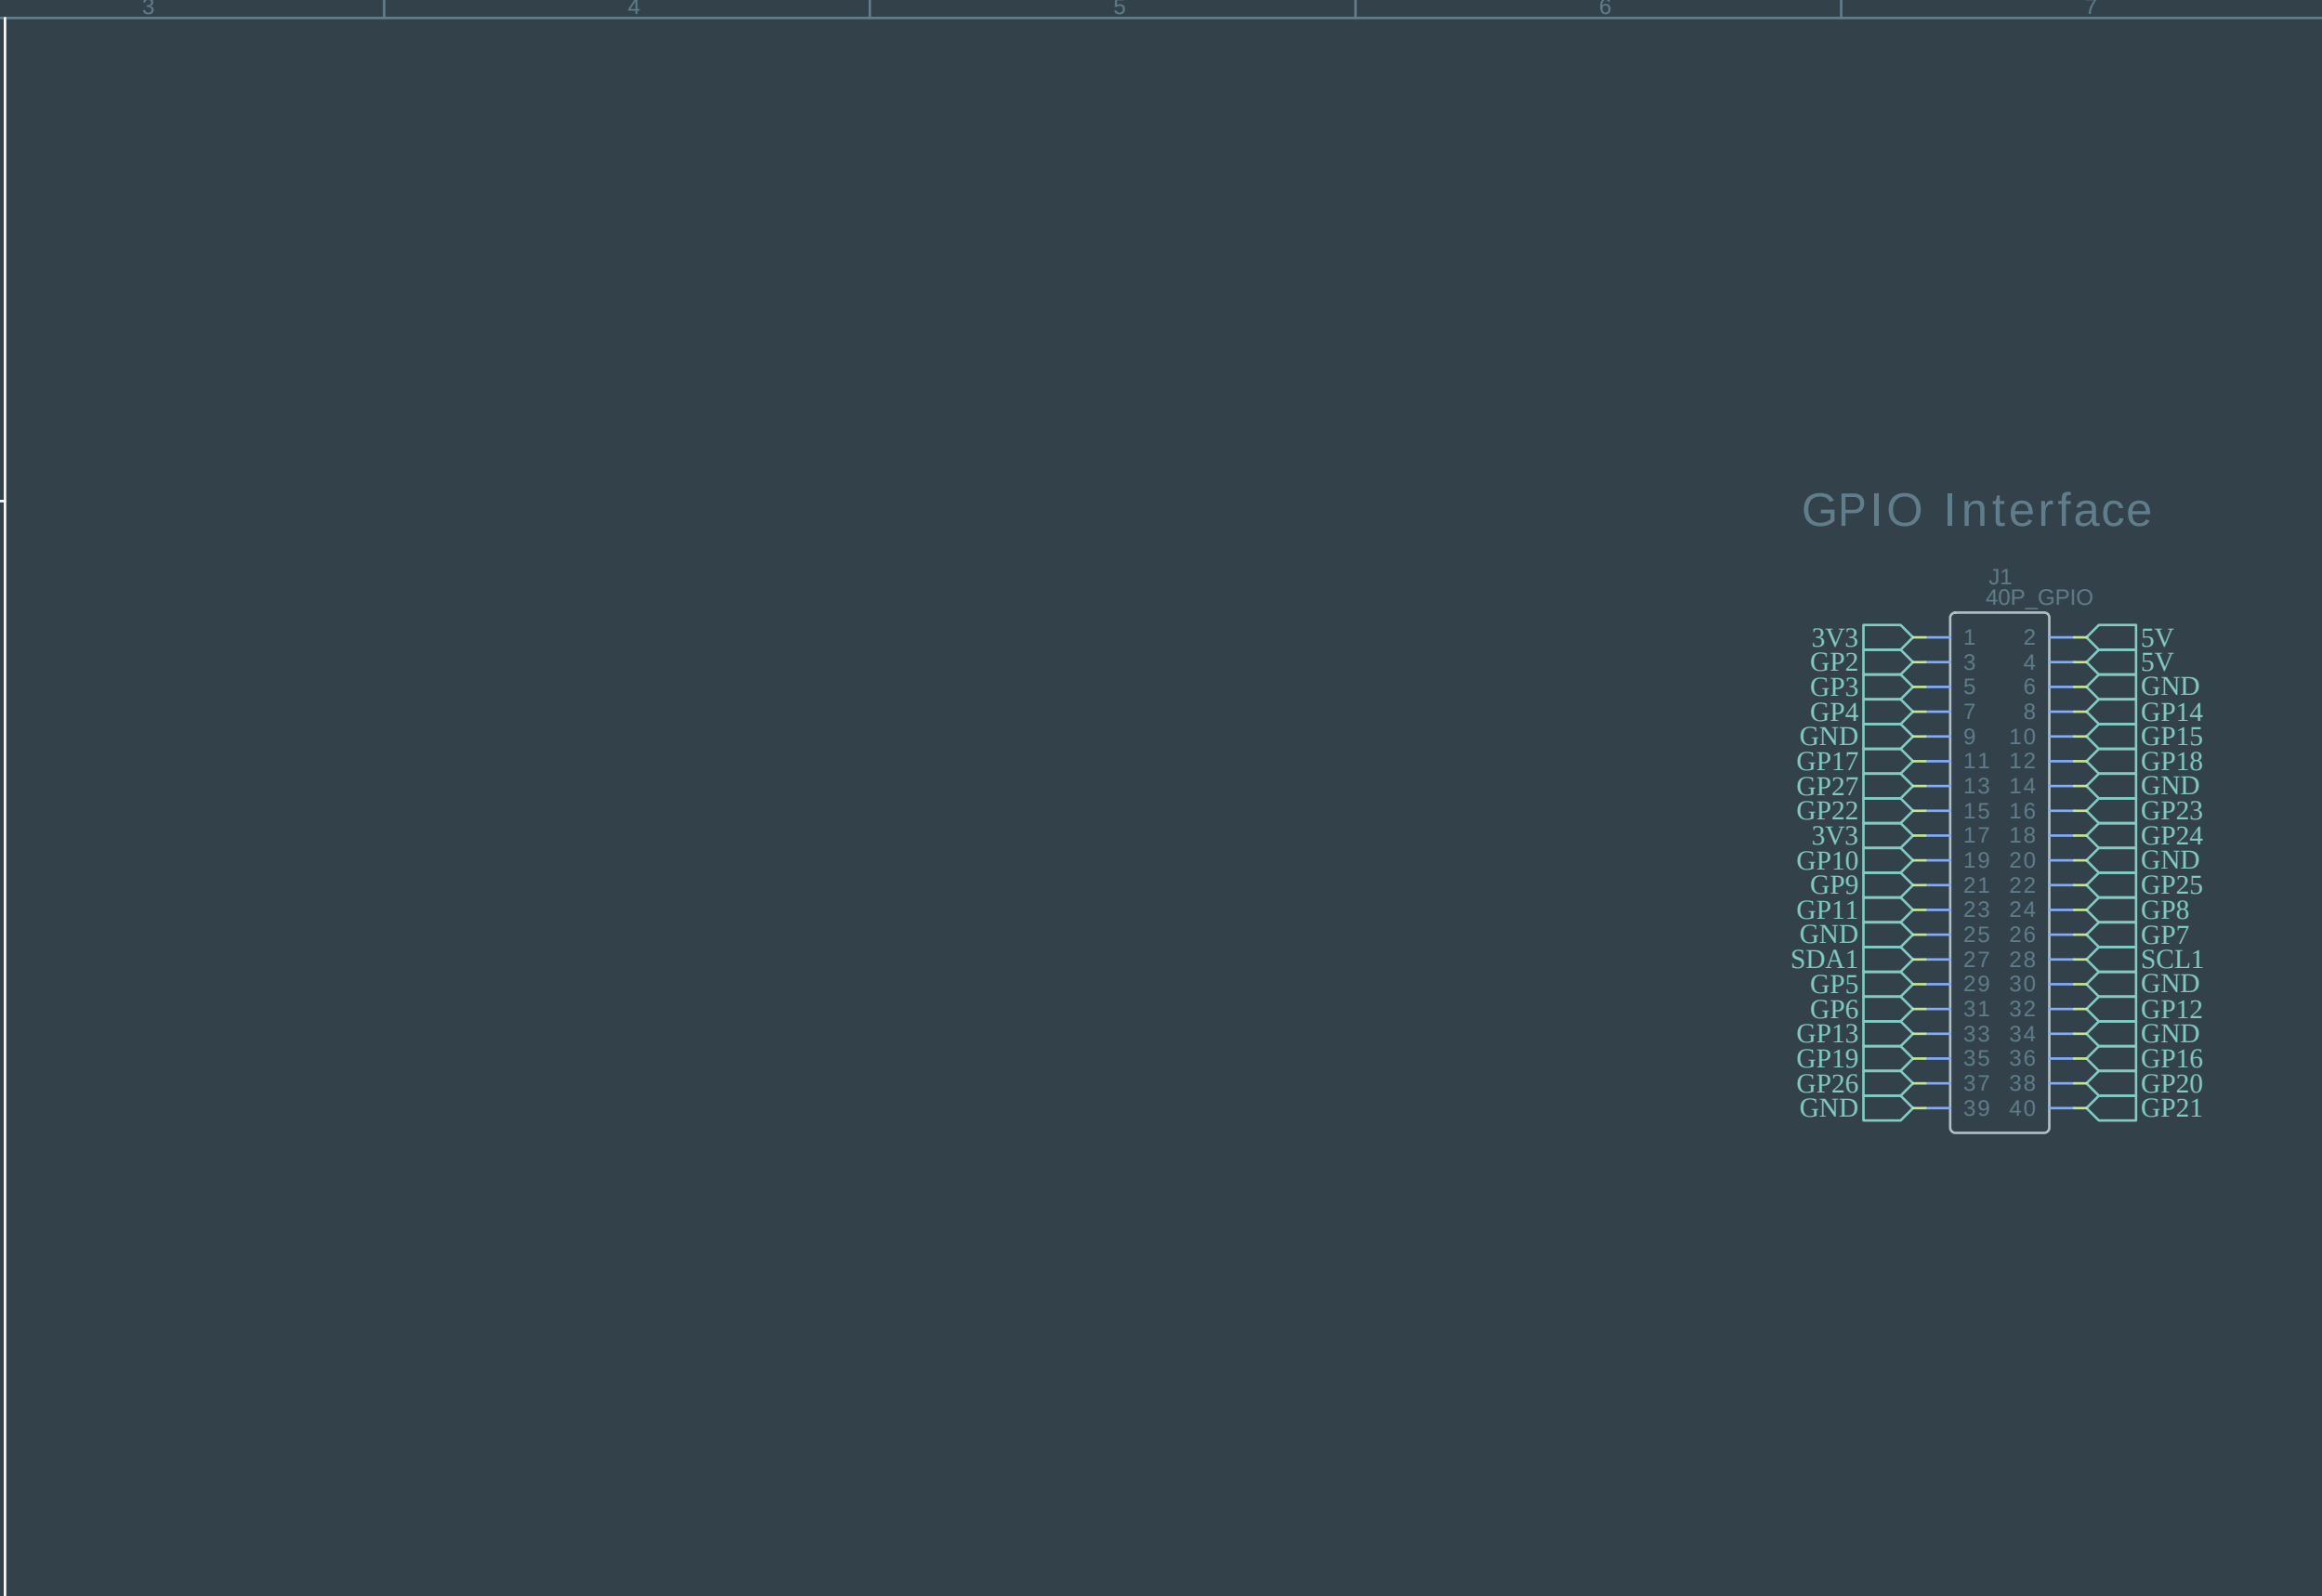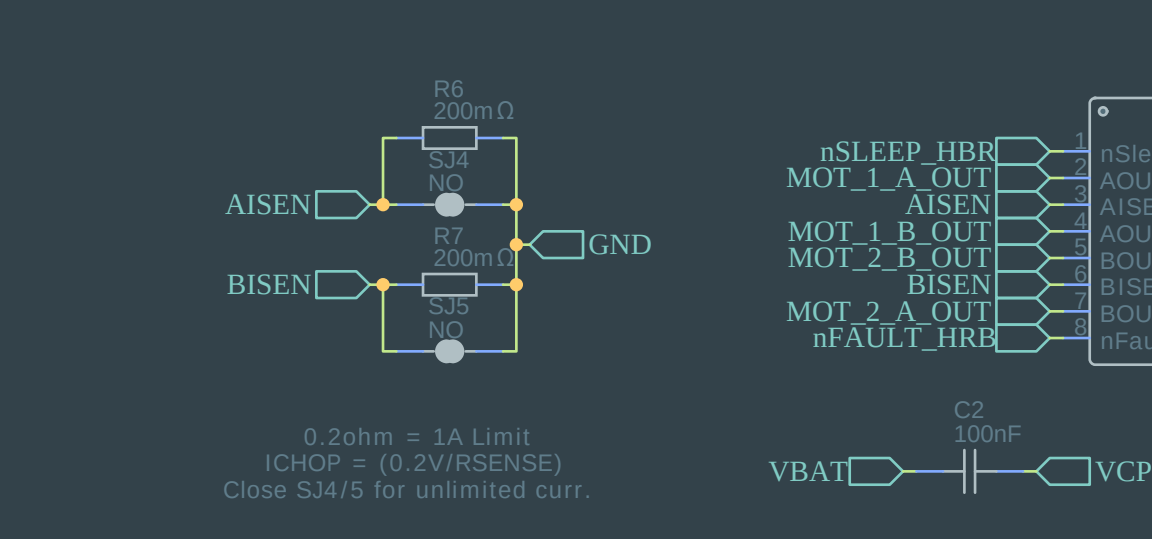

Motor Interface

N30 Movement Motor + Steering Servo

