



After flashing the Arduino with the code below, open the serial monitor and set it to append carriage return only and then set the baud rate to 9600.

## Arduino Mega

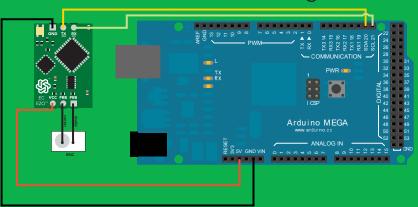

## Arduino Uno

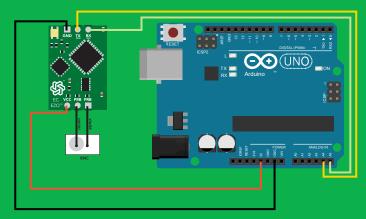

Click here to download the sample code