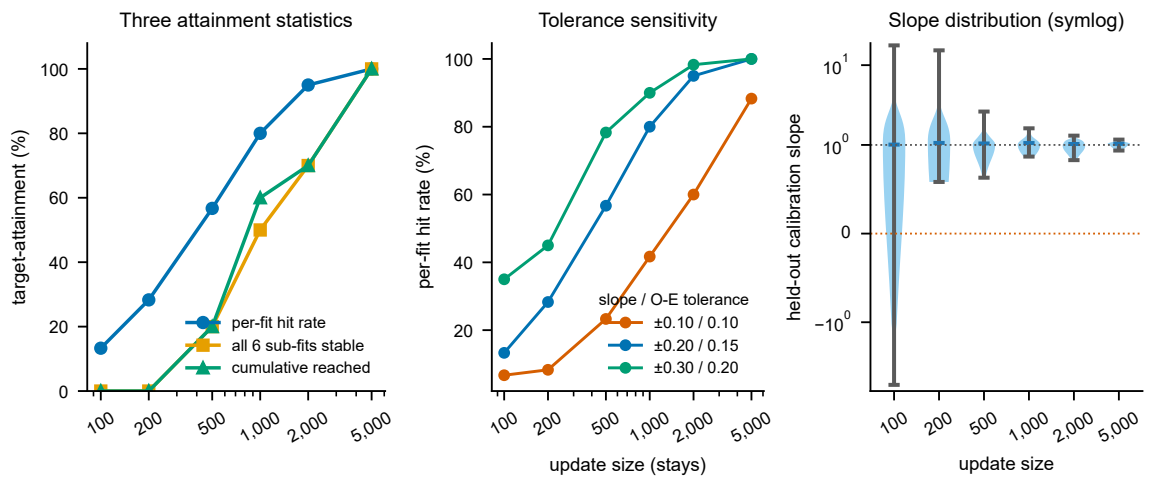
Three attainment statistics
target-attainment (%)
0
20
40
60
80
100
100
200
500
1,000
2,000
5,000
per-fit hit rate
all 6 sub-fits stable
cumulative reached
Tolerance sensitivity
per-fit hit rate (%)
20
40
60
80
100
slope / O-E tolerance
±0.10 / 0.10
±0.20 / 0.15
±0.30 / 0.20
update size (stays)
Slope distribution (symlog)
held-out calibration slope
10^1
10^0
0
-10^0
update size