
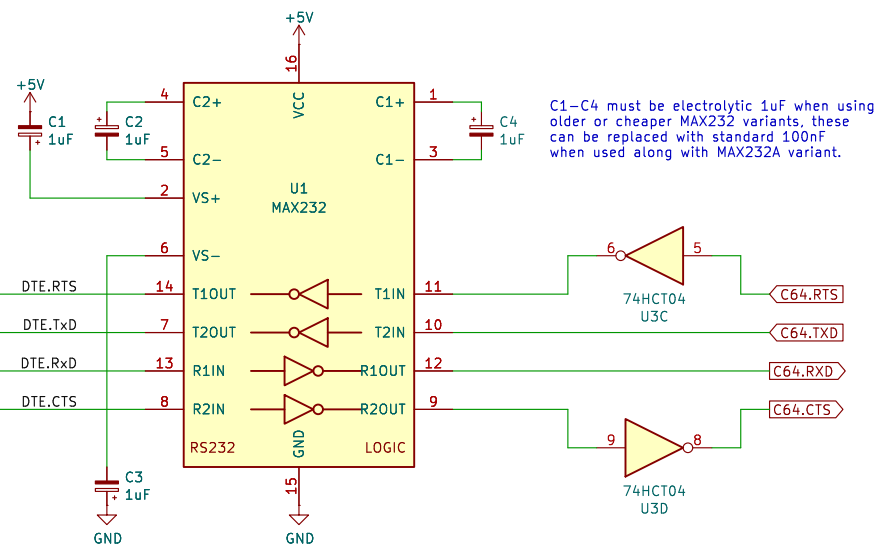


JP3/JP4 can be used to fake some of the signals, in particular we probably need to fake DSR. As for DCD you can either have it coming from U2, or we can fake it as well (possibly leaving U2 uninstalled).


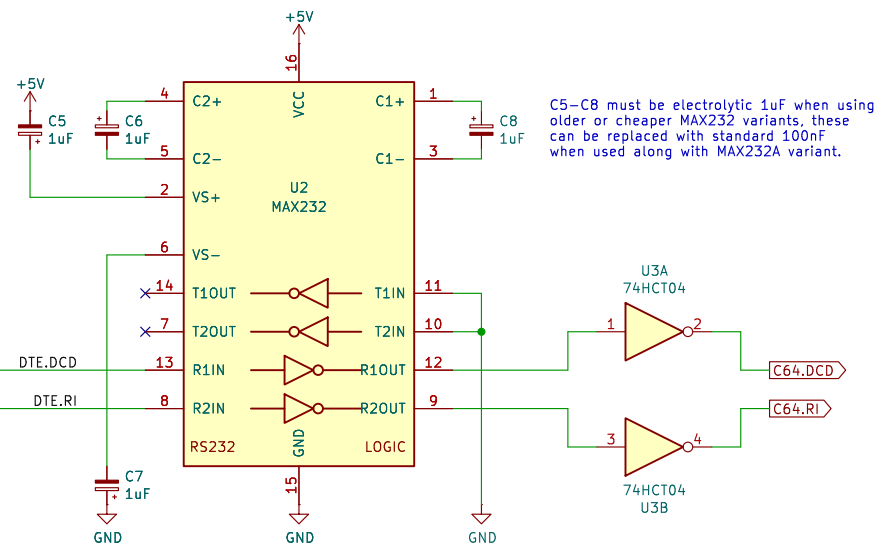


Sheet: /RS-232/
File: rs232.kicad_sch

Title:

Size: A4 Date:
KiCad E.D.A. 8.0.4

Rev:
Id: 2/3

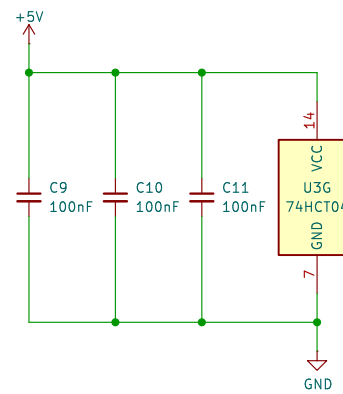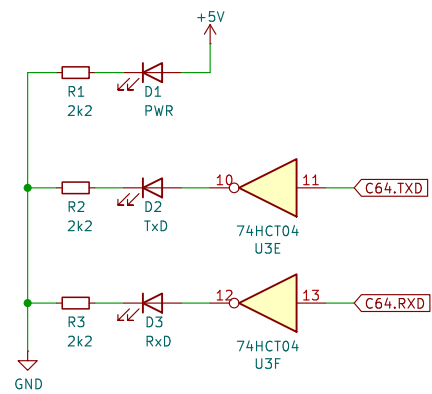

Sheet: /Power & Status/ File: power.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 8.0.4	Id: 3/3	