


C1–C4 may be 100nF monolithic capacitors when used with MAX232A IC. When used with the common cheaper alternatives such as MAX232CPE, these need to be 1uF polarized electrolytic capacitors.

Handles the circuitry for connecting to the Arduino over RS–232.		
Sheet: /RS–232/ File: rs232.sch		
Title: 3.5" RetroPanel Module (RS–232)		
Size: A4	Date:	Rev: A
KiCad E.D.A. kicad (5.1.8)–1		Id: 2/3

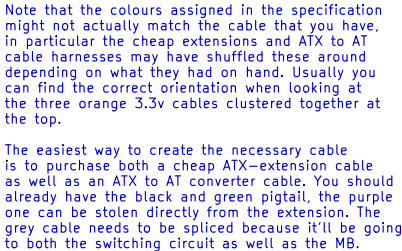

Sheet: /Smart Switch/
File: smart_switch.sch

Size: A4	Date:	Rev: A
KiCad E.D.A. kicad (5.1.8)–1		Id: 3/3