SGV2 Survey Form Supplementary Guide

The below list will assist in navigating the Wittur Survey form. A careful reminder for the North American market, **Wittur's handing is opposite to the native understanding** set by prevalent vendors in the North American market. Handing is ambiguous and it is best to refer to the diagrams provided in the form. Diagrams are of top-down views.

Door Operator Packages

1. Complete section 1-3 on the Wittur form.
2. Complete section 4.
    a. Multiple elevators can be assigned to a single config if the arrangement is the same.Circle the side (F/R) to further identify for admin and shipping.
3. Complete section 5 for a total sum of operators in the assigned configuration. If hall/landingtracks are required include the quantity.
4. Complete section 6-7. Fill in the Wittur term for the configuration into box 6 from the top downpictures below.
5. Complete section 8. Select the hall door interlocks that are being coupled with the Witturclutch/coupler. The GAL/ECI, MAC, and Dover clutches are the same part with differentlypositioned bushings. Thus any clutch ordered for those three can be configured to the othersAMD is the native Wittur interlocks. Custom clutches can be designed to specification. If Otis6940 locks are being coupled provide the quantity of landing doors. Brackets affixing the rotating roller are required.
6. Complete section 9. Standard mounting brackets are recommended.
7. Complete section 11. Tools are not required to commission and do not permanently mount tothe operator. 4 speed profiles are selected by dip switch along with other parameters. Finetuning and maintenance are performed with the tool.
8. Complete section 12 if required.

FTL Distribution Inc.
Canada's Exclusive Wittur Distributor
www.ftl-distribution.com
Rev1 - 2026

Custom Clutch/Coupler

If an existing or new hall interlock, that is not a standard option, is being used custom clutches/couplers can be designed. Clutches/couplers can be of the compression (the clutch compresses two rollers together) or the expansion (the clutch pushes two rollers apart) type. Furthermore, the clutch/coupler can be mounted to the door panel or the hangar assembly. Arrangements A-D depict those 4 combinations.

1. Select the arrangement for the configuration.
2. Provide the dimensions required.
    a. For clutch design the travel of the rollers is required which is the delta between rollerslocked and rollers unlocked.
    b. If pickup assemblies are being installed new it is recommended to extend the HIdimension to allow for use of standard equipment in parts of clutch/ coupler.
    c. Horizontal dimensions should be measured against the horizon. If rollers are verticallyoffset only the horizontal dimensions shall be provided.

Door Panel Adapter

Door Panel Adapters adapt the hangar assembly to the car or hall door. It is recommended to install a panel adapter for the doors to utilize the rigidity of the operator. Panel adapters will provide rigid connection to the existing tapped holes in the door panel. Wittur supplied doors do not require panel adapters as their bolt pattern matches the hangar assembly. Other OEMs have typical dimensions for typical door sizes but it is best to measure to verify compatibility. A – F & S are required for Door Panel Adapters.

Print Form

Reset Form

SGV Car Door Modernization Order/Survey Form
Issue - 02 292024


Email: info.us@wittur.com
Fax: (216) 524-9710

WITTUR


Complete Sections 1-11 Ref. TC.2.005255 for additional technical details

1	**Contact: Name/Email/Phone:**	David Nevin	dnevin@attaelevators.com	905-409-3963			
2	**Company/Company Address:**	ATTA Elevators					
3	**Project Reference/Address:**	84 Lorne St - Sudbury					
4	**Elevator # (s) / Side F/R:** circle F=Front, R=Rear	# 1 F	# F	# F	# F	# F	# F
5a	**Door Operator Quantity:**	1					
5b	**Landing Track Quantity:**	0					
	Order Confirgurations	**Config. #1**	**Config. #2**	**Config. #3**	**Config. #4**	**Config. #5**	**Config. #6**
6	**Door Type/Clutch Location:**	1S-L					


1 Panel Side Opening (1SSS)




2 Panel Center Opening (1SCO)

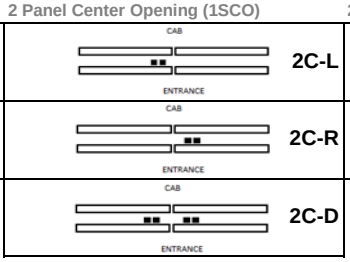

2 Panel Telescopic Opening (2SSS)



4 Panel Center Opening (2SCO)



7	**Clear Opening (CO) Width:**	42					
	Clear Height (CH):	84					

CH required if new car door panels are required

8	**Clutch Interface:** Select final interface. circle selection	GAL/ECI MAC DOVER WH E5A OTIS 6940 AMD OTHER	GAL/ECI MAC DOVER WH E5A OTIS 6940 AMD OTHER	GAL/ECI MAC DOVER WH E5A OTIS 6940 AMD OTHER	GAL/ECI MAC DOVER WH E5A OTIS 6940 AMD OTHER	GAL/ECI MAC DOVER WH E5A OTIS 6940 AMD OTHER	GAL/ECI MAC DOVER WH E5A OTIS 6940 AMD OTHER

For OTHER complete Survey for Lock Roller Position and provide photo - custom quote required

8a	**If Otis - Total Landing Dr Qty:**						
9	**Operator Mounting:**	Custom					

(default) V2-01, Standard mounting brackets
0 No mounting brackets

10a	**Cab Door Panel:**	0					

Advise **Thickness/Finish (write thickness/shorthand for finish, ex: 1.25-C for 1.25" with #4 Stainless Steel cladding)**

0	Retain existing	**A**	New Double skin, powder coat - prime ()
1	1.00" Thick	**B (+ RAL#)**	New Double skin, powder coat - standard Wittur color ()
1.25	1.25" Thick	**C**	New Double skin, Stainless Steel #4 Clad
		D	New Double skin, Stainless Steel #8 Clad
		E	New Double skin, Bronze #4 Clad
		F	New Double skin, Bronze #8 Clad

10b	**Cab Door Panel Interface:** (Standard pendent bolt interface) circle selection	AMD MAC DOVER GAL ARMOR OTHER	AMD MAC DOVER GAL ARMOR OTHER	AMD MAC DOVER GAL ARMOR OTHER	AMD MAC DOVER GAL ARMOR OTHER	AMD MAC DOVER GAL ARMOR OTHER	AMD MAC DOVER GAL ARMOR OTHER

For OTHER complete Survey for Operator & Pendent Bolt Position and provide photo - custom quote required

10c	Main Elevator Controller	MCE	
10d	Door Protection (Formula Systems)	None Safescreen 2D Vision Plus 2D/3D	# 1

10e **Landing Door Panel:**	0					

Advise **Thickness/Finish (write thickness/shorthand for finish, ex: 1.25-C for 1.25" with #4 Stainless Steel cladding)**

0	Retain existing	**A**	New Double skin, powder coat - prime ()
1	1.00" Thick	**B (+ RAL#)**	New Double skin, powder coat - standard Wittur color ()
1.25	1.25" Thick	**C**	New Double skin, Stainless Steel #4 Clad
		D	New Double skin, Stainless Steel #8 Clad
		E	New Double skin, Bronze #4 Clad
		F	New Double skin, Bronze #8 Clad

10f **Landing Door Panel Interface:** (Standard pendent bolt interface)						
circle selection	AMD	AMD	AMD	AMD	AMD	AMD
	MAC	MAC	MAC	MAC	MAC	MAC
	DOVER	DOVER	DOVER	DOVER	DOVER	DOVER
	GAL	GAL	GAL	GAL	GAL	GAL
	ARMOR	ARMOR	ARMOR	ARMOR	ARMOR	ARMOR
	OTHER	OTHER	OTHER	OTHER	OTHER	OTHER


For OTHER complete Survey for Operator & Pendent Bolt Position and provide photo - custom quote required

11 **Programming Tool Qty:** 1 **not required for commissioning; this is a maintenace/fine tuning tool**

12 **Notes:**

LOCK ROLLER POSITION SURVEY


Complete Survey for Lock Roller Position and provide photo for custom clutch quote

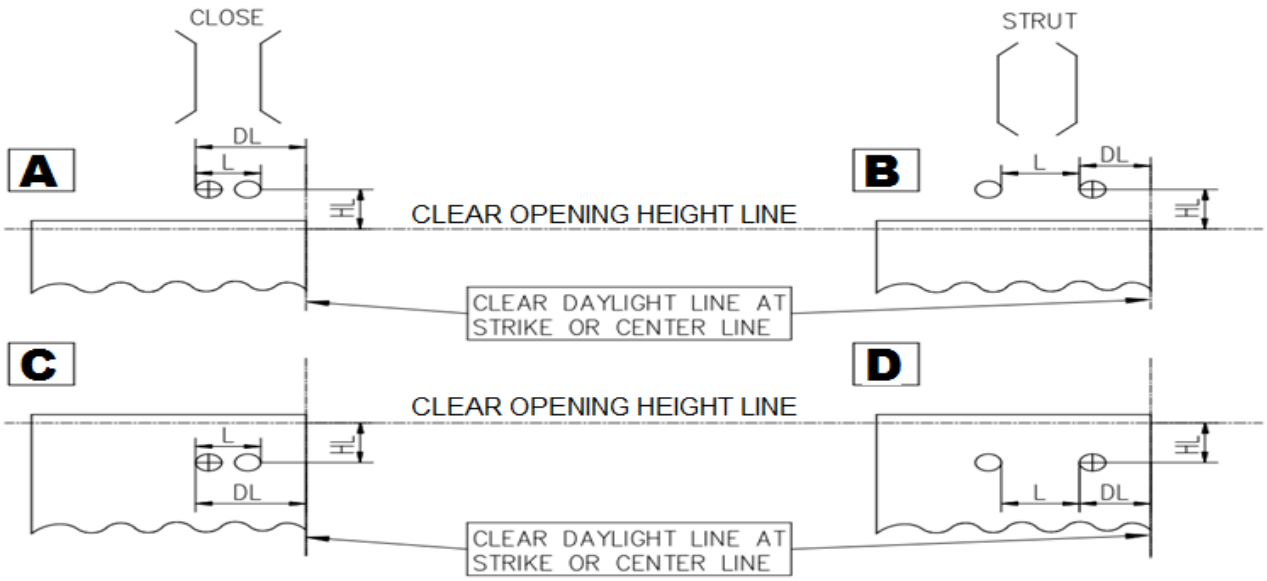


Order Confirgurations	Config. #1	Config. #2	Config. #3	Config. #4	Config. #5	Config. #6
ARRANGEMENT -	C					
HEIGHT OF LOCK ROLLERS - HL=	12"					
DISTANCE OF LOCK ROLLERS - DL=	12"					
ROLLERS, LOCKED - L=	gal moh ??					
ROLLERS, UNLOCKED - L=	gal moh??					

OPERATOR AND PENDENT BOLT SURVEY - SINGLE SPEED DOOR


Complete Survey for Operator & Pendent Bolt Position and provide photo for custom quote

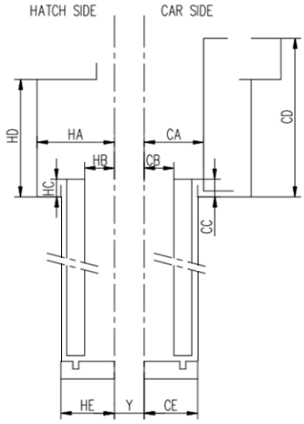



1 Panel Side Opening (1SSS)



2 Panel Center Opening (1SCO)



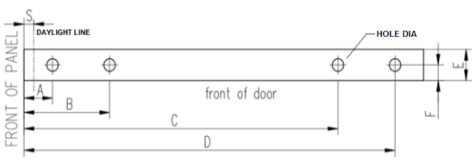


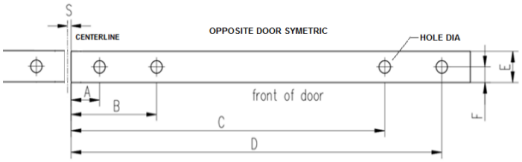

	Config. #1	Config. #2	Config. #3	Config. #4	Config. #5	Config. #6
CAR						
4.06" min CA=	5.5					
1.65" min CB=	2-1/4"					
CC=	1					
CD=	10.5					
CE=	3-1/4					
Y=	1-1/4					
A=	2 7/8					
B=						
C=	15 7/8					
D=						
E=	1 1/2					
F=	3/4					
S=	1/8					
HOLE DIA=	3/8					
HALL						
3.56" min HA=	4"					
1.75" min HB=	2 1/4					
HC=	0					
HD=	22 1/4					
HE=	4 1/2					
A=	2 7/8					
B=						
C=	15 7/8					
D=						
E=	1 1/2					
F=	3/4					
S=	1/8					
HOLE DIA=	3/8					

OPERATOR AND PENDENT BOLT SURVEY -TWO SPEED DOOR


Complete Survey for Operator & Pendent Bolt Position and provide photo for custom quote

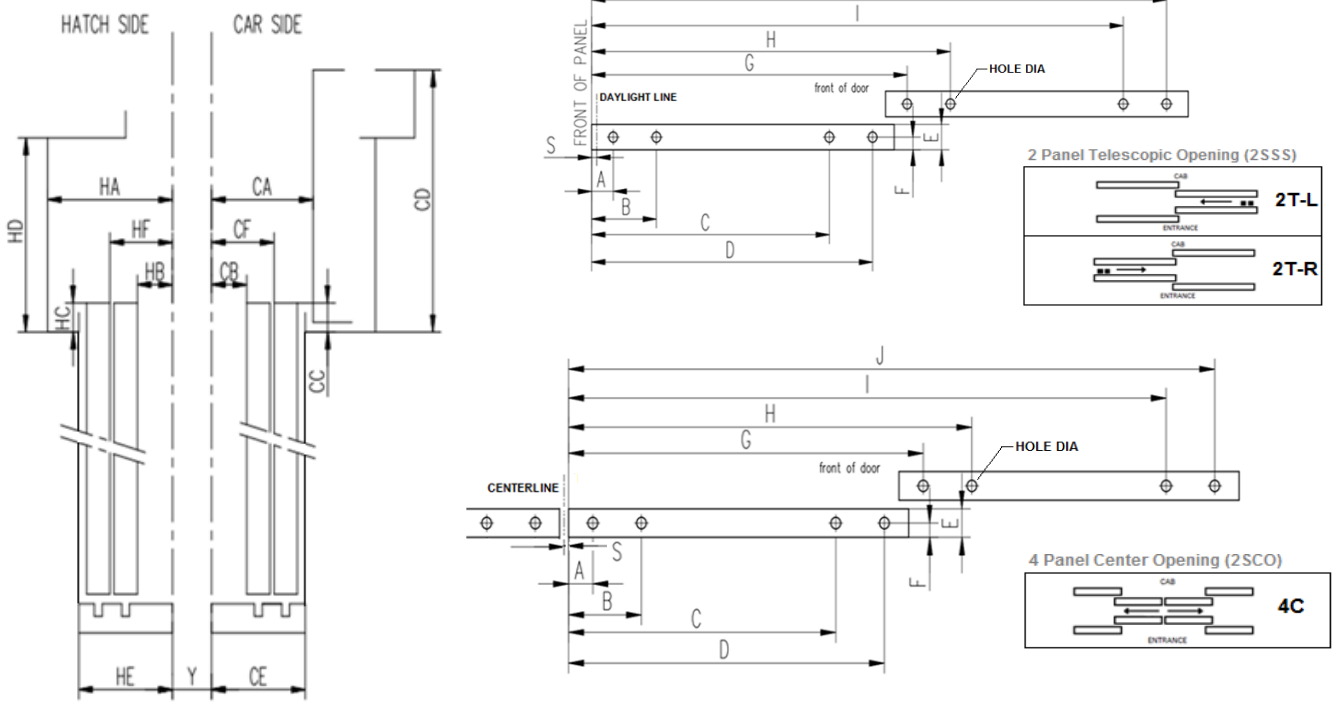



Order Confirgurations	Config. #1	Config. #2	Config. #3	Config. #4	Config. #5	Config. #6
CAR						
5.55" min CA=						
1.65" min CB=						
CC=						
CD=						
CE=						
CF=						
Y=						
A=						
B=						
C=						
D=						
E=						
F=						
G=						
H=						
I=						
J=						
S=						
HOLE DIA=						


OPERATOR AND PENDENT BOLT SURVEY -TWO SPEED DOOR


Complete Survey for Operator & Pendent Bolt Position and provide photo for custom quote

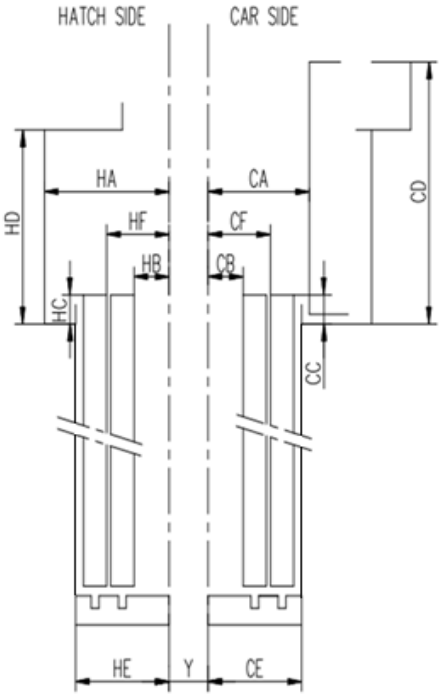

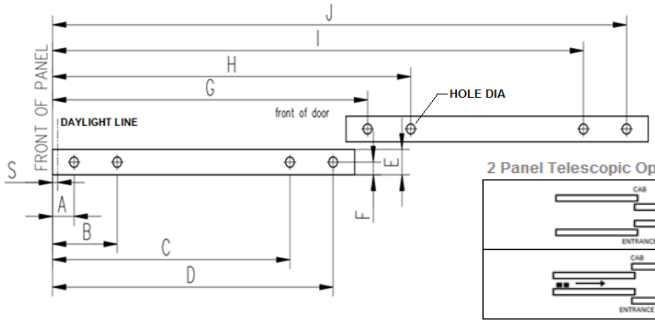



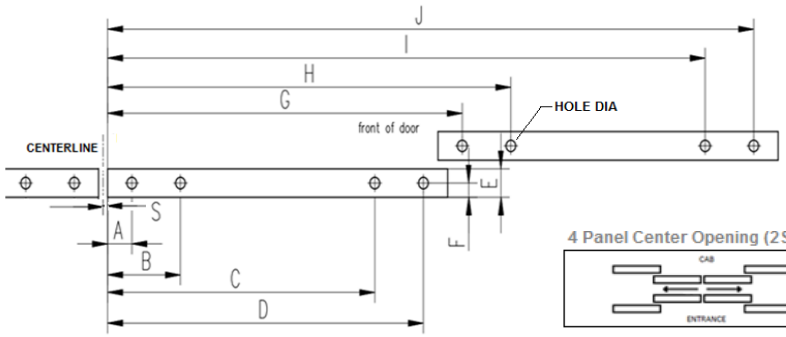




Order Confirgurations	Config. #1	Config. #2	Config. #3	Config. #4	Config. #5	Config. #6
HALL						
5.00" min HA=						
1.75" min HB=						
HC=						
HD=						
HE=						
HF=						
A=						
B=						
C=						
D=						
E=						
F=						
G=						
H=						
I=						
J=						
S=						
HOLE DIA=						


Scope of supply:

Base:
- Operator (Drive/Track)
- Clutch

Options:
- Mounting Brackets
- Panel Adapters
- Cab Door Panels

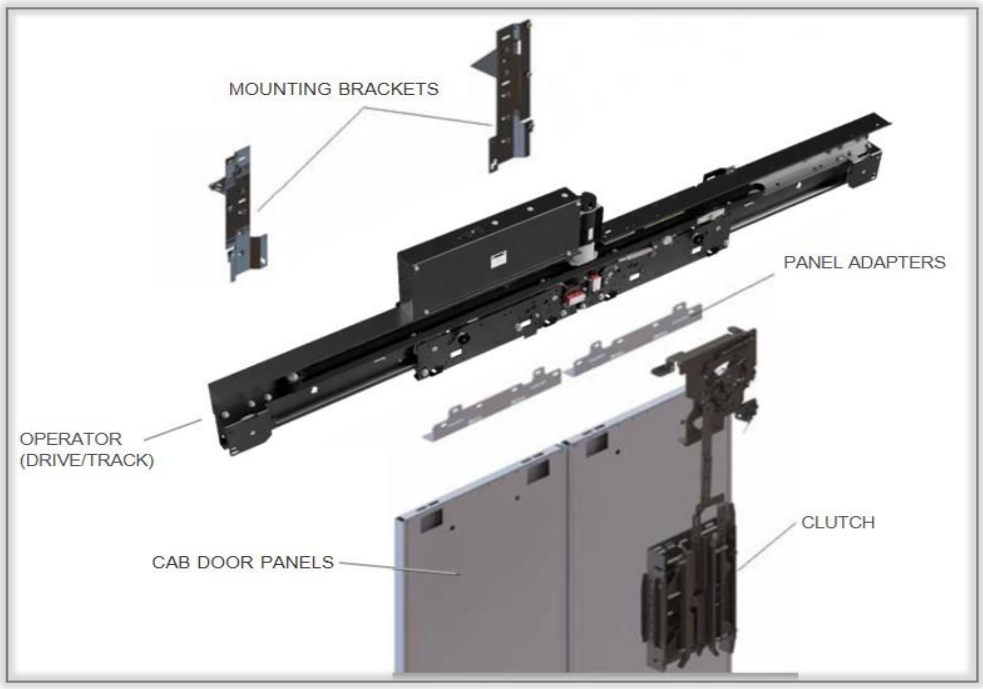


SPACE REQUIREMENTS FOR APPLICATION

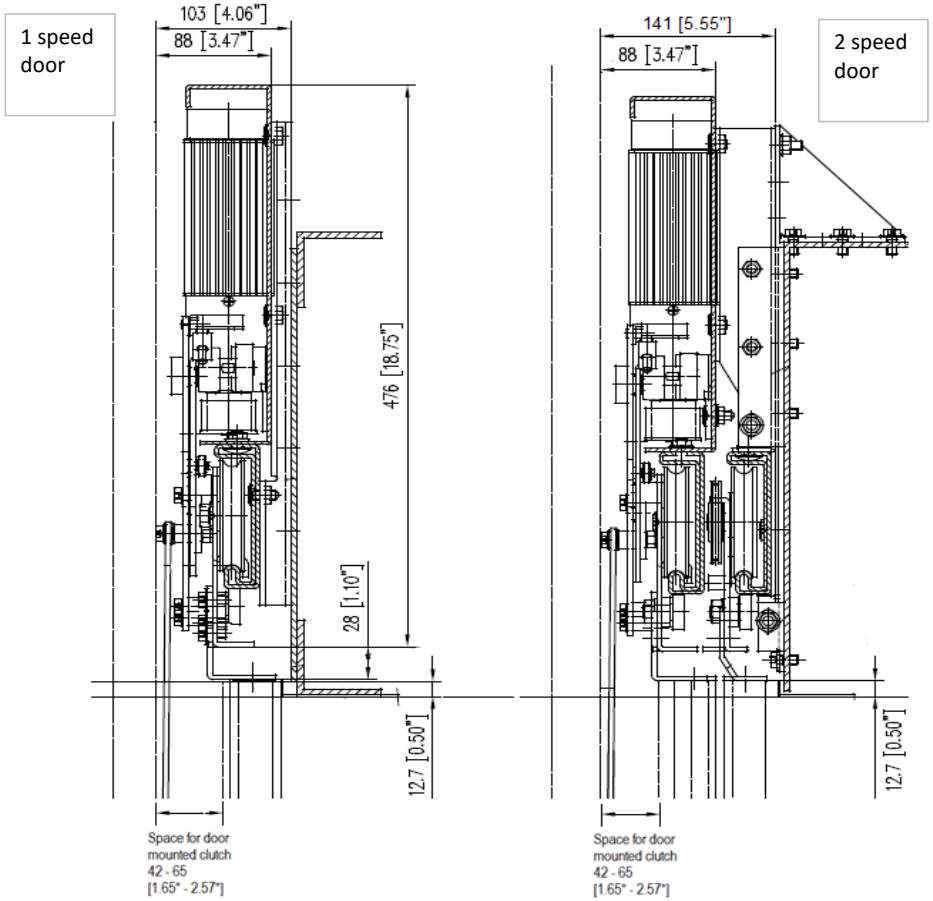

Scope of supply:


Base:
1) Landing Door Track Assembly
2) Landing Door Interlock
3) Spirator Closer
4) Panel Relating for Multi-Panel Doors
5) Panel Mounted Pickup Roller Assembly
6) MOD Track Mounting Brackets

Options:
7) Panel Adapters
8) Landing Door Panels (not shown)

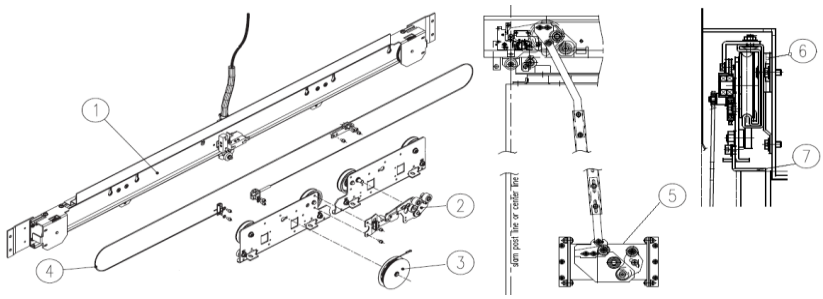


SPACE REQUIREMENTS FOR APPLICATION

1 speed door

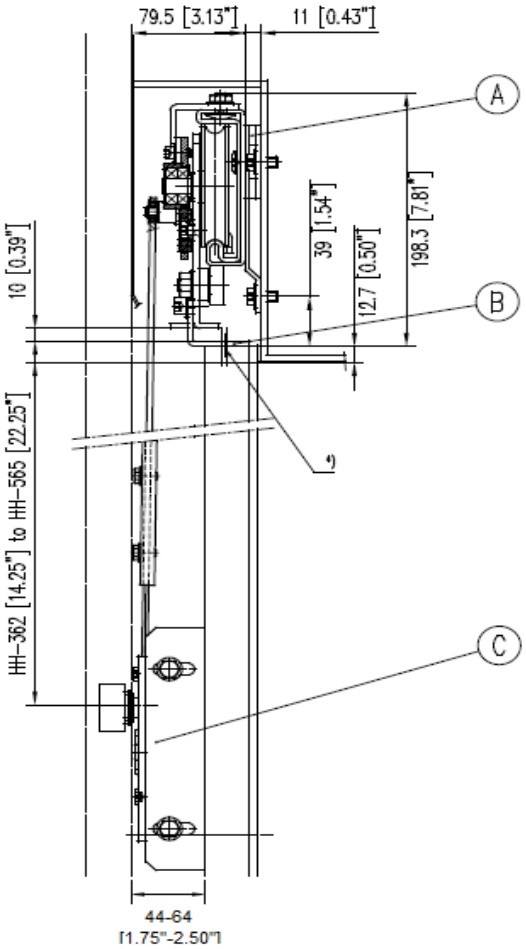


2 speed door

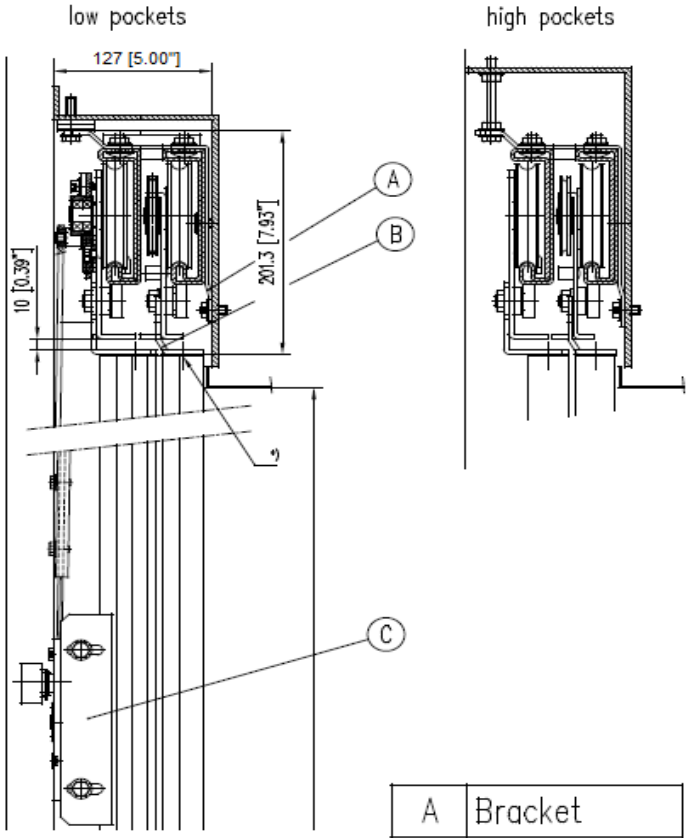


A	Bracket
B	Panel adapter
C	Lockrollers


1 PANEL SIDE OPENING (1S)					
CO	X	Header Length	CO	X	Header Length
32	64.75	67.5	41	82.75	85.5
33	66.75	69.5	42	84.75	87.5
34	68.75	71.5	43	86.75	89.5
35	70.75	73.5	44	88.75	91.5
36	72.75	75.5	45	90.75	93.5
37	74.75	77.5	46	92.75	95.5
38	76.75	79.5	47	94.75	97.5
39	78.75	81.5	48	96.75	99.5

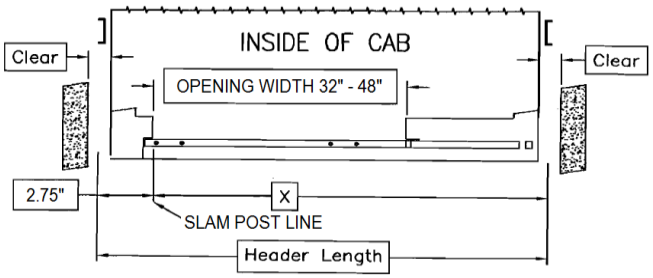


2 Panel Center Opening (2C)			
CO	Header Length	CO	Header Length
36	72	49	98
37	74	50	100
38	76	51	102
39	78	52	104
40	80	53	106
41	82	54	108
42	84	55	110
43	86	56	112
44	88	57	114
45	90	58	116
46	92	59	118
47	94	60	120
48	96		

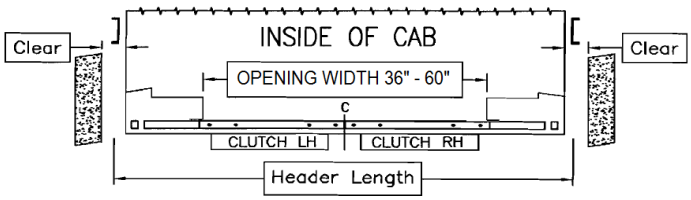

2 PANEL TELESCOPIC OPENING (2T)					
CO	X	Header Length	CO	X	Header Length
30	45.75	48.5	52	78.75	81.5
31	47.25	50	53	80.25	83
32	48.75	51.5	54	81.75	84.5
33	50.25	53	55	83.25	86
34	51.75	54.5	56	84.75	87.5
35	53.25	56	57	86.25	89
36	54.75	57.5	58	87.75	90.5
37	56.25	59	59	89.25	92
38	57.75	60.5	60	90.75	93.5
39	59.25	62	61	92.25	95
40	60.75	63.5	62	93.75	96.5
41	62.25	65	63	95.25	98
42	63.75	66.5	64	96.75	99.5
43	65.25	68	65	98.25	101
44	66.75	69.5	66	99.75	102.5
45	68.25	71	67	101.25	104
46	69.75	72.5	68	102.75	105.5
47	71.25	74	69	104.25	107
48	72.75	75.5	70	105.75	108.5
49	74.25	77	71	107.25	110
50	75.75	78.5	72	108.75	111.5
51	77.25	80			

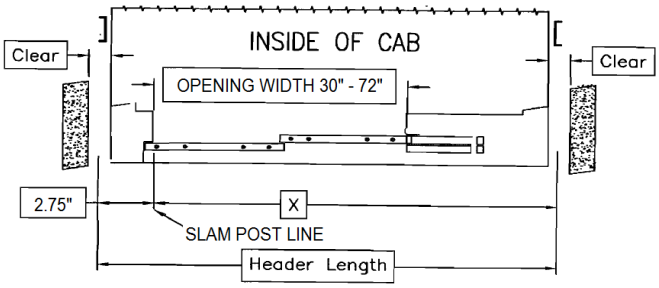

4 Panel Center Opening (4C)					
CO	Header Length	CO	Header Length	CO	Header Length
48	76.9	72	108	96	144
49	77.9	73	109.5	97	145.5
50	78.9	74	111	98	147
51	79.9	75	112.5	99	148.5
52	80.9	76	114	100	150
53	81.9	77	115.5	101	151.5
54	82.9	78	117	102	153
55	83.9	79	118.5	103	154.5
56	84.4	80	120	104	156
57	85.9	81	121.5	105	157.5
58	87.4	82	123	106	159
59	88.9	83	124.5	107	160.5
60	90.4	84	126	108	162
61	91.9	85	127.5	109	163.5
62	93.4	86	129	110	165
63	94	87	130.5	111	166.5
64	96	88	132	112	168
65	97.5	89	133.5	113	169.5
66	99	90	135	114	171
67	100.5	91	136.5	115	172.5
68	102	92	138	116	174
69	103.5	93	139.5	117	175.5
70	105	94	141	118	177
71	106.5	95	142.5		

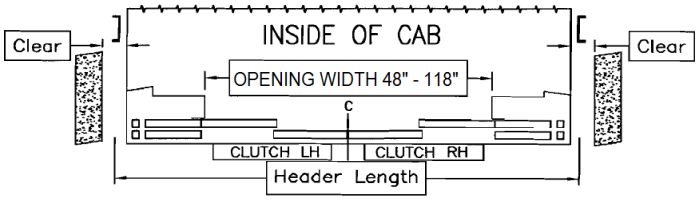

7 **Clear Opening (CO) Width:**
Clear Height (CH):

		type	Clear Opening (CO) Width	CO Standard sizes*	Clear Height (CH)	CH Standard sizes*
1 speed side slide/opening	1SSS, 1SSO	1S - 1 panel side	32"-48"	36", 42"	80"-108"	84", 96"
1 speed center opening/parting	1SCO, 1SCP	2C - 2 panel center	36"-60"	42", 48"	80"-120"	84", 96"
2 speed side slide/opening	2SSS, 2SSO	2T - 2 panel side	30"-72"	36", 42", 48"	80"-120"	84", 96"
2 speed center opening/parting	2SCO, 2SCP	4C - 4 panel center	48"-118"	-	80"-120"	-


*special sizes on request with longer lead time

8 **Clutch Interface:**


WGMD51E- GAL/ECI




WGMD51E- MAC



WGMD51E- DOVER



WHE5A52L Westinghouse E5A (CH-50) [1]



WOTS55L OTIS 6940 [2]



WAMD01E AMD



[1] E5A Pickup 50mm (2") below clear height (CH) line
[2] Requires landing roller fixing kit, 1 per landing


WAMD99E **All Others:** Complete Survey for Lock Roller Position and provide photo

9 **Operator Mounting:**


0 No Mounting

default V2-01

1 speed door



2 speed door



10 **Door Panel Interface:**

NO Standard AMD	**WMAC01** MAC	**WDOV01** DOVER	**WGAL01** GAL	**WARM01** ARMOR	**WAMD99** ALL OTHERS

All Others: Complete Survey for Operator & Pendent Bolt Position and provide photo