


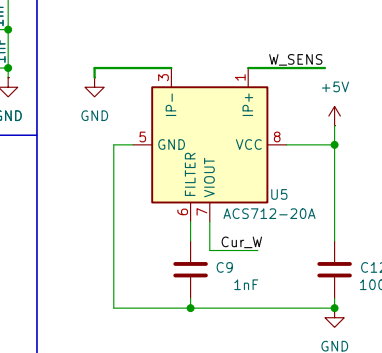
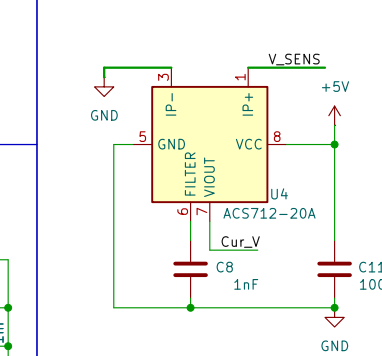
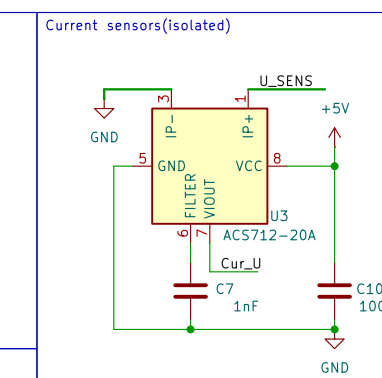






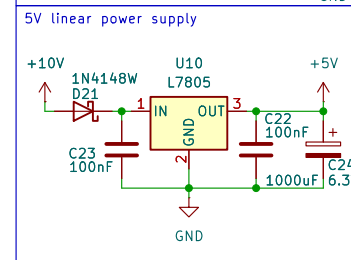


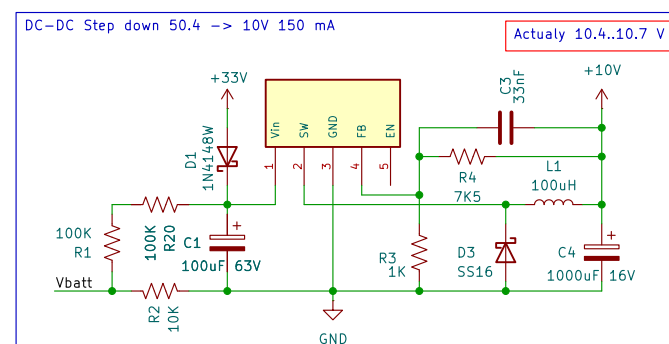

C9 is recommended for noise management.

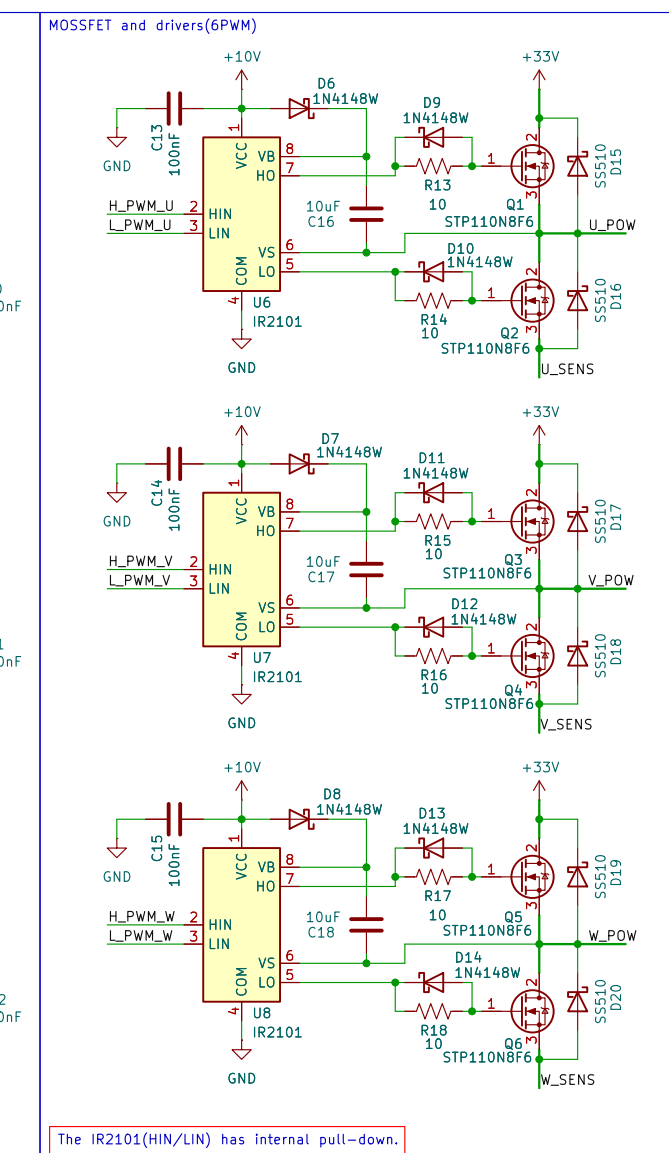

- 3-Phase STM32 BLDC motor driver:
- Battery: 12S
- VCC: 36.0..50.4V
- I(max): 20A
- Current measurements per phase



By Techn0man1ac

Sheet: /
File: Inverter.kicad_sch

Title: Simple STM32 BLDC motor controller

Size: A3	Date: 2026-06-14
KiCad E.D.A. 10.0.3	

Date: 2026-06-14

Rev: V0.2

Id: 1/1