
CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

SMART • RELIABLE • EFFICIENT

No.1 Choice of Solar EPCs Across India

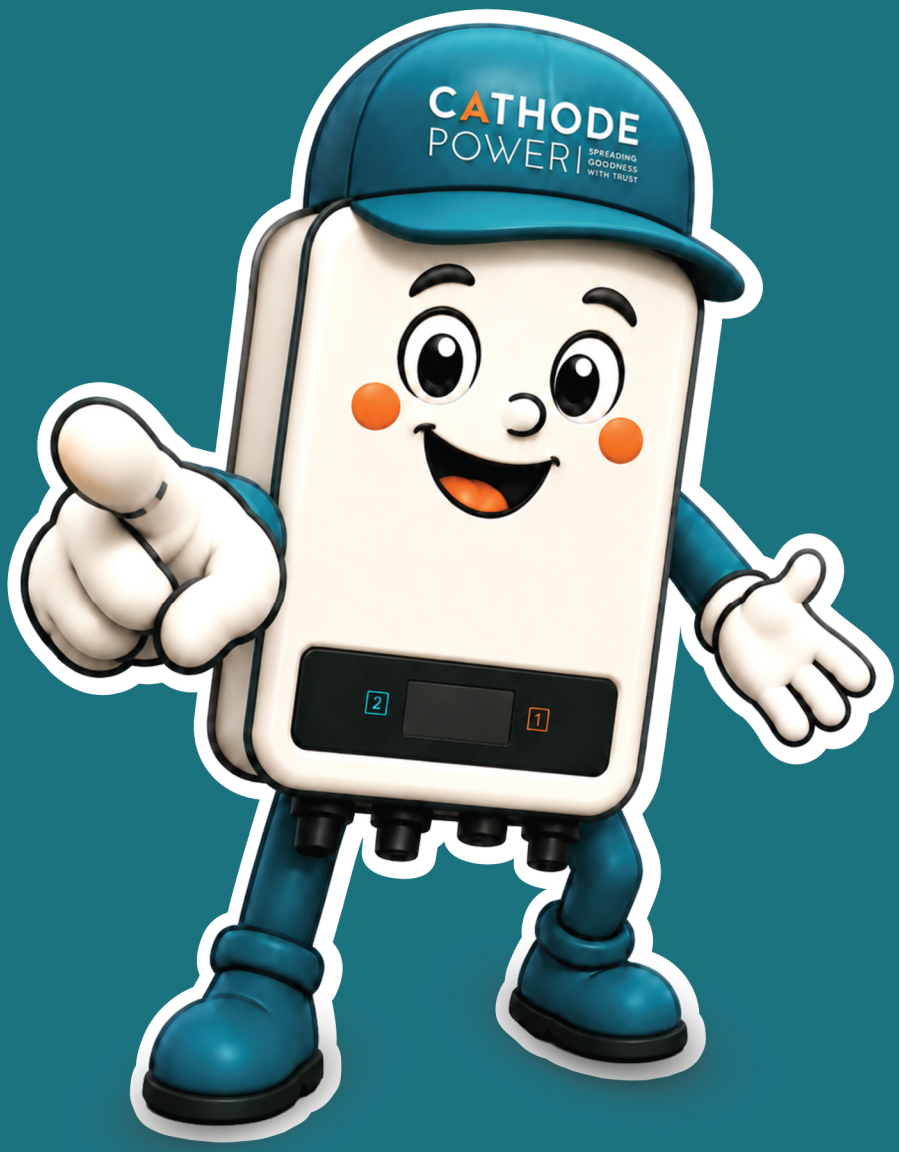


CATHODE POWER | SPREADING GOODNESS WITH TRUST

Empowering Epcs To Build A Sustainable Future With Smart, Efficient & Reliable Inverter Solutions.

On-Grid | Hybrid | Micro | BESS

WHO'S GOT YOUR BACK ON EVERY INSTALLATION?

YOUR POWER PARTNER FROM INSTALLATION TO AFTER - SALES

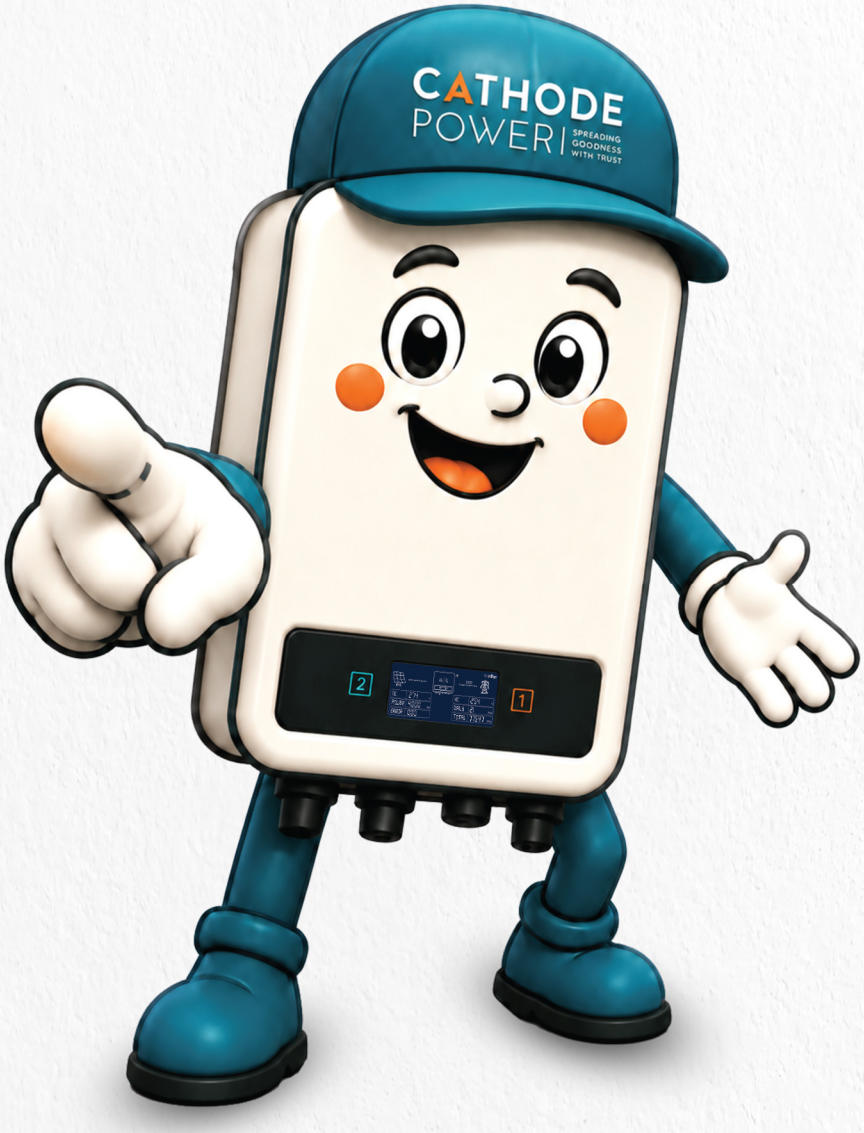


SINGLE PHASE
SOLAR GTI

2kW | 2.3kW | 3kW | 3.4kW | 3.6kW | 4kW

Deep Draw Technology

Built to Perform in Extreme Heat

Compact & Efficient

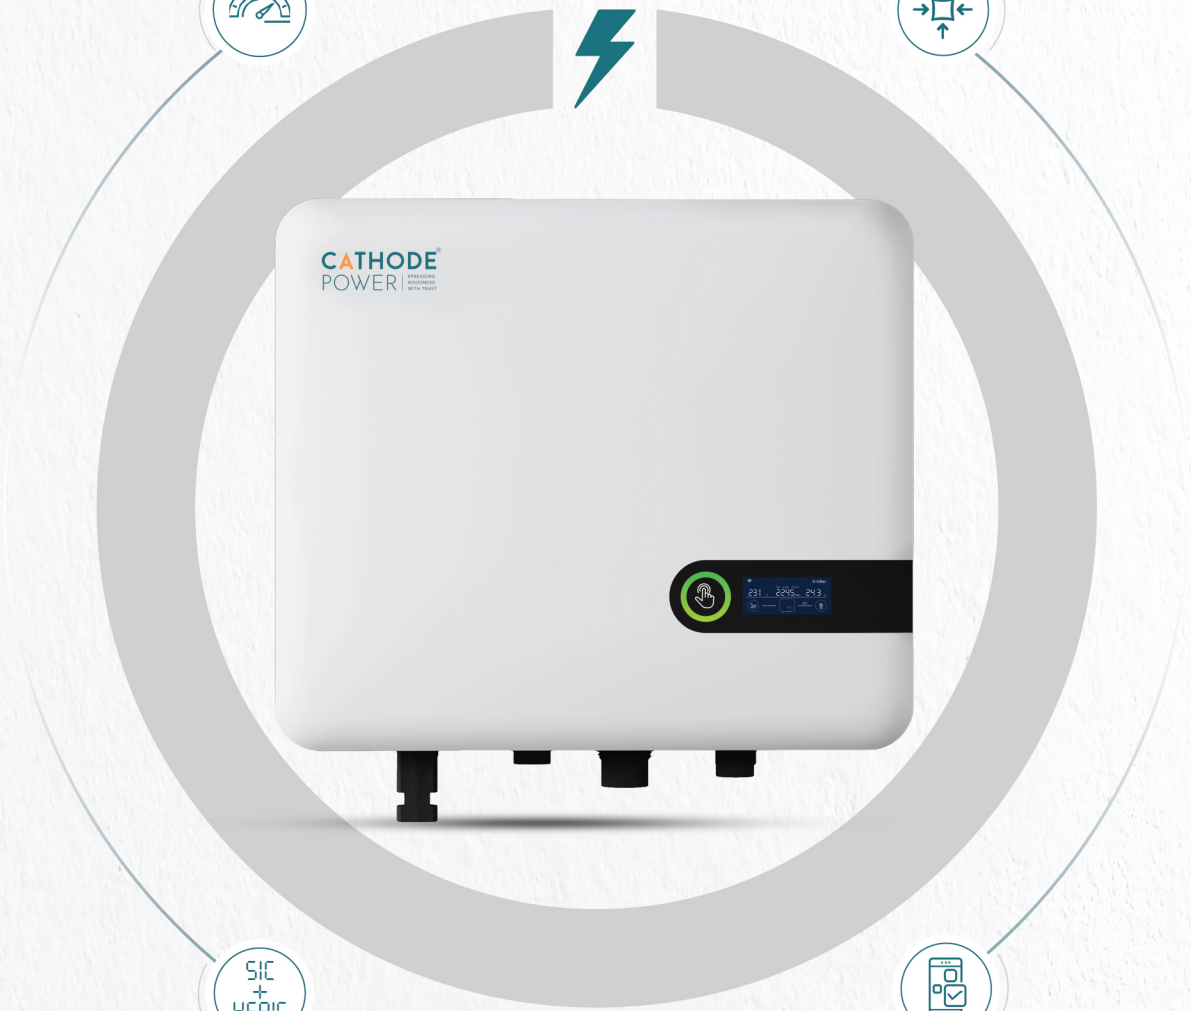

Sic + Heric Technology

IP66 Rated

Live Monitoring


CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(6G-2000LS TO 6G-4000LS)

MODEL NO.	6G-2000LS	6G-2300LS	6G-3000LS	6G-3400LS	6G-3600LS	6G-4000LS
DC Side | Input Parameters						
Max. Allowable DC Voltage (VDC) | Max. DC Voltage (VDC)	275/550V	275/550V	320/550V	320/550V	320/550V	385/550V
Min. System Start | Shut Down Voltage (VDC)	45V	45V	45V	45V	45V	45V
Max. Input Current (A)	20A	20A	20A	20A	20A	20A
Max. Short Circuit I/p Current Per MPPT	30A	30A	30A	30A	30A	30A
Number of MPP Tracker | Total Nos. Of String	1/1	1/1	1/1	1/1	1/1	1/1
Input Terminal Type	MC4					
AC Side | Output Parameters						
Rated Output Power (W)	2000W	2300W	3000W	3400W	3600W	4000W
Maximum Output Power (VA)	2000VA	2300VA	3000VA	3400VA	3600VA	4000VA
Nominal Output Voltage/Range (V)	L/N/PE,240/140-310Vac					
AC Grid Frequency/Range (Hz)	50Hz / 45Hz-55Hz					
Max. Output Current (A)	8.4A	9.5A	12.5A	14.2A	15A	16.5A
AC Connection (With PE)	Single Phase					
Current Distortion (THDi)	<1.5%	<1.5%	<1.5%	<1.5%	<1.5%	<1.5%
Power Factor	>0.99 (Adjustable From 0.8 Leading To 0.8 Lagging)					
Efficiency						
Maximum Conversion Efficiency	99.7%	99.3%	98.3%	98.4%	98.5%	98.8%
European Efficiency	98.3%	98%	98.1%	98.2%	98.2%	98.3%
MPPT Efficiency	98.7%	98.7%	98.7%	98.5%	99.8%	98.9%
Safety & Protection						
DC Reverse-Polarity Protection	YES					
Anti-Islanding / Overvoltage Protection	YES					
Shortcut Circuit Protection	YES					
Leakage Current Protection	YES					
Grid Monitoring / Ground Fault Monitoring	YES					
DC/AC Side SPD (Thermally Protected)	YES | TYPE I + II					
General Parameters						
Dimension (L/W/H) (mm)	154/287/285mm					
Weight (Kg)	5.5KG					
Embedded DC Switch	Optional					
Zero Export Function	Optional					
Night Power Consumption (W)	<0.2					
Isolation Type	Transformerless					
Technology	Ai Ready Sic + Heric					
Protection Degree	IP66 According To IEC60529					
Operation Temperature (°C)	-25 - +60					
Cooling Concept	PWM Technology, Auto RPM | Natural Convection + Fan Cooling (12000 RPM)					
Operating Altitude (M)	<2000m Without Power Derating					
Acoustic Noise Level (DB)	<35 DB					
Display	Graphic LCD					
Communication Interface	Standard WIFI; RS485 (Optional)					
Warranty	10 Years ; 25 Years For Optional					

CATHODE POWER | SPREADING GOODNESS WITH TRUST

PAN INDIA PRESENCE

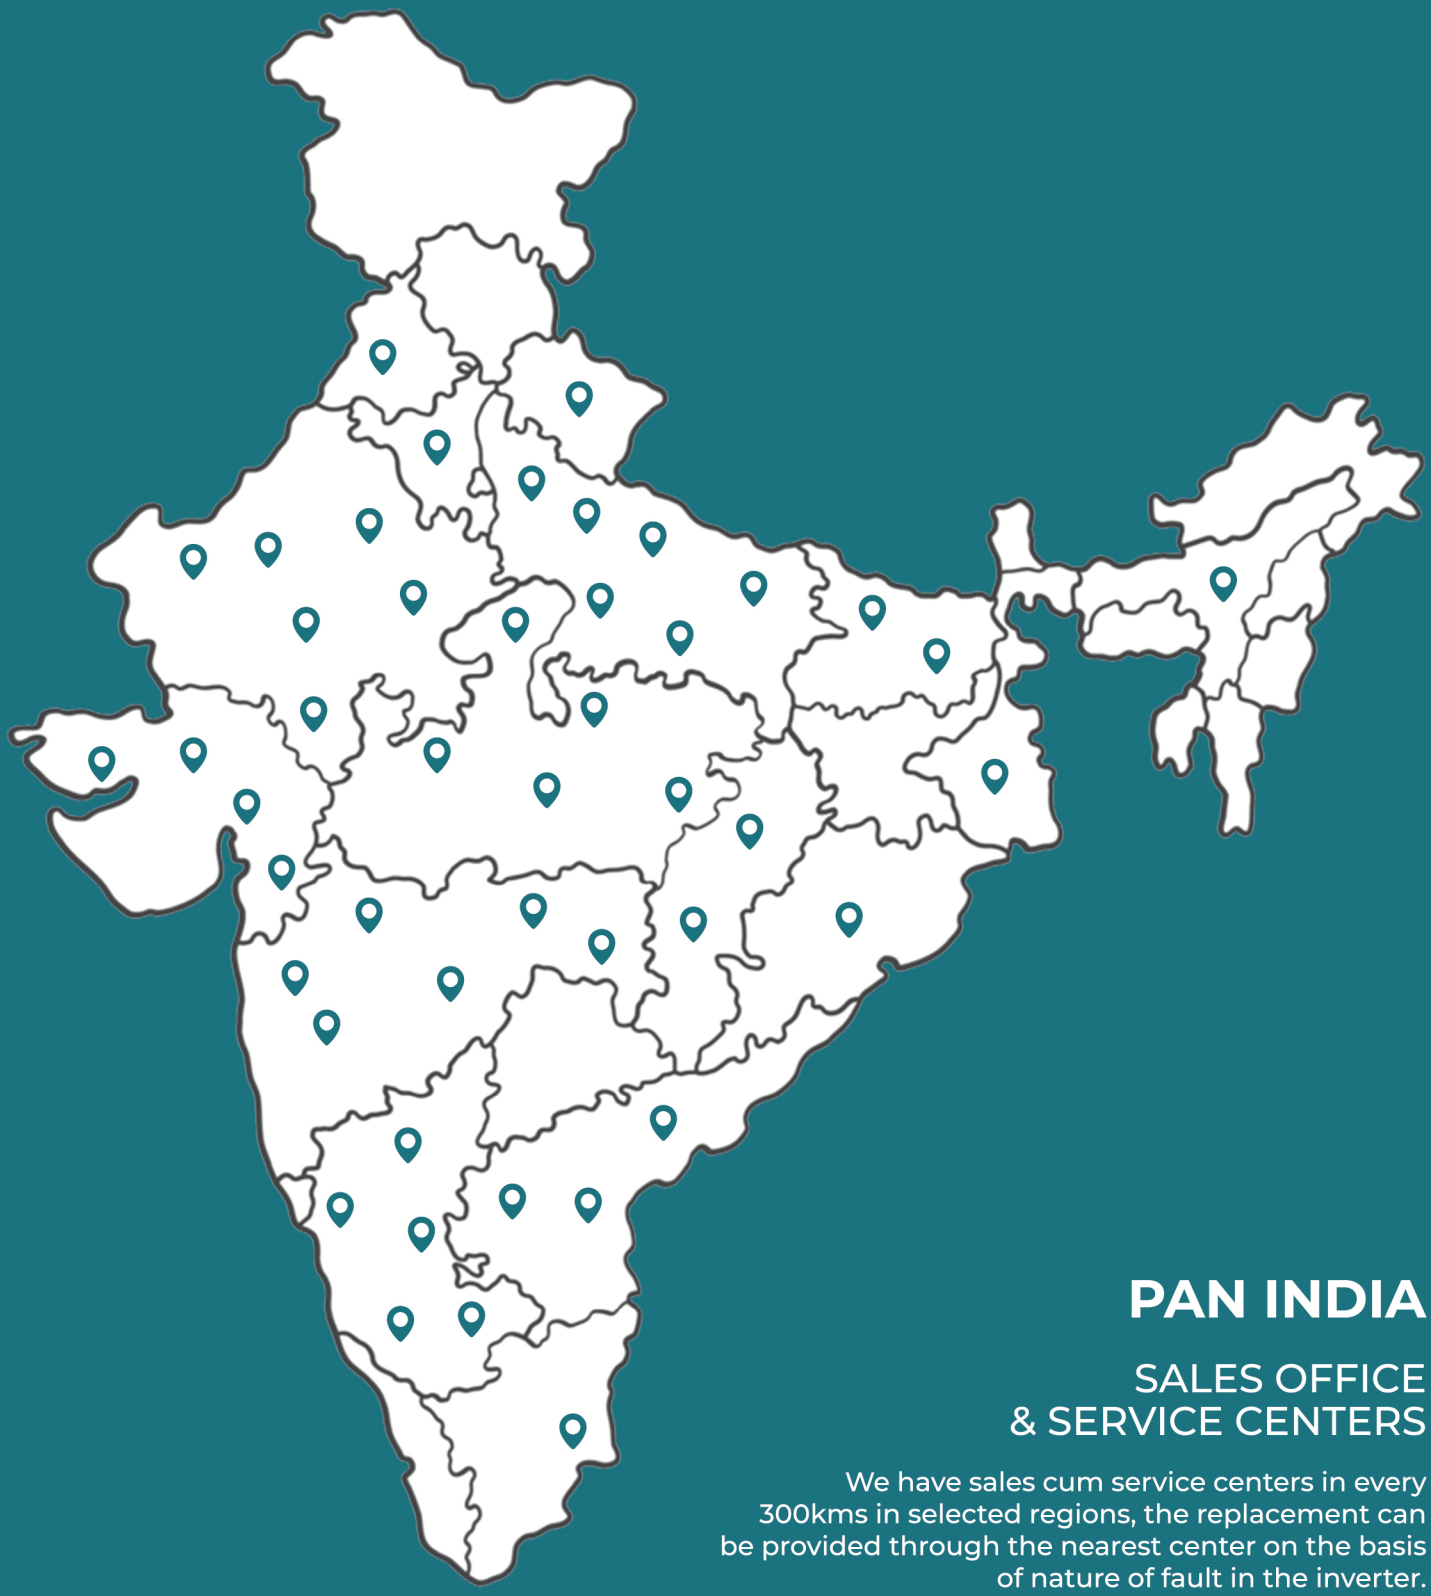

PAN INDIA

SALES OFFICE & SERVICE CENTERS

We have sales cum service centers in every 300kms in selected regions, the replacement can be provided through the nearest center on the basis of nature of fault in the inverter.

#YEHSWADESHIHAI

CATHODE® POWER

SPREADING GOODNESS WITH TRUST

Cathode Power Private Limited.

Corporate Office: SF 201-203, Fortune Platinum, Nr. Tulsidham Circle, Manjalpur, Vadodara, Gujarat - 390011

Factory Address: R.S. No.229, Sugar Factory, Ta. Karjan, Opp. Gandhara, Gandhara, Gujarat-391210

Contact: +91 98002 68002

Email: hello@cathodepower.com

Website: www.cathodepower.com