
CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

SMART • RELIABLE • EFFICIENT

No.1 Choice of Solar EPCs Across India

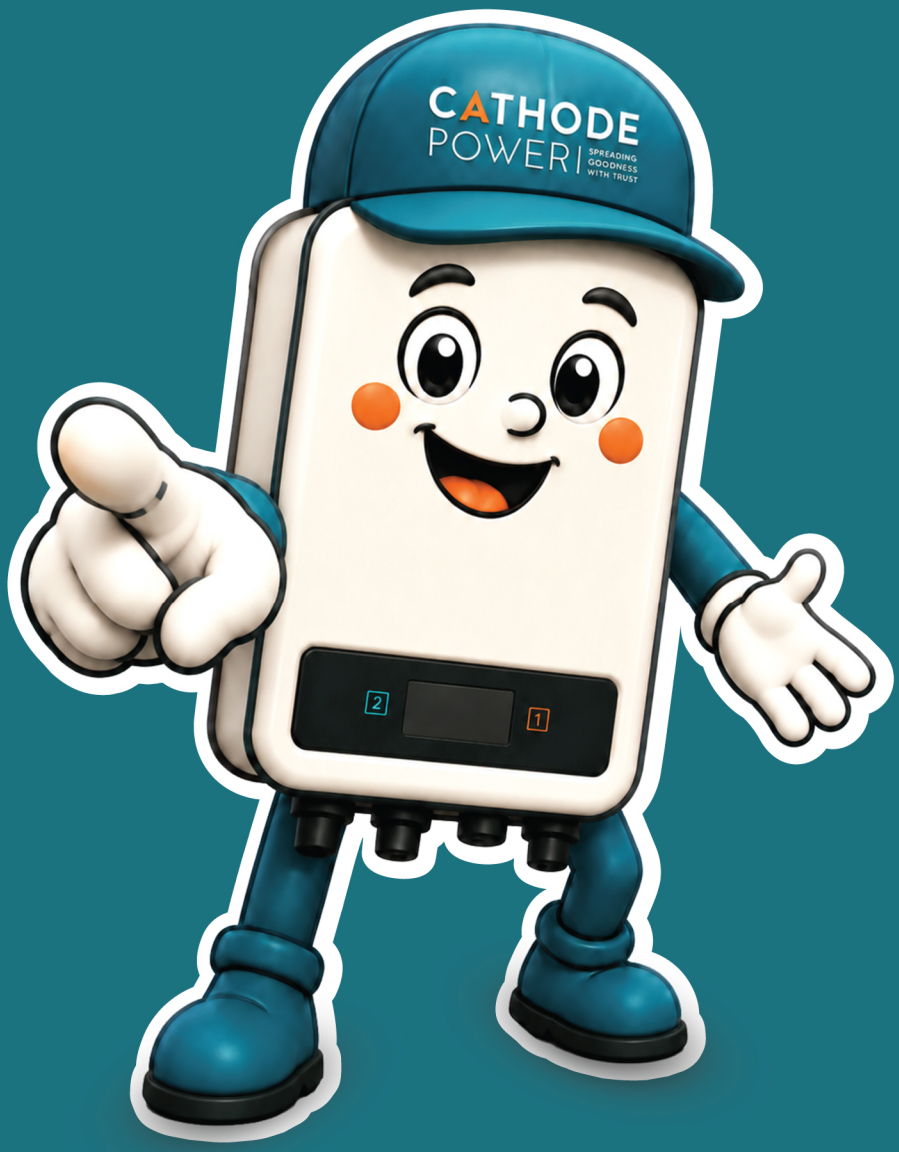


CATHODE POWER | SPREADING GOODNESS WITH TRUST

Empowering Epcs To Build A Sustainable Future With Smart, Efficient & Reliable Inverter Solutions.

On-Grid | Hybrid | Micro | BESS

WHO'S GOT YOUR BACK ON EVERY INSTALLATION?

YOUR POWER PARTNER FROM INSTALLATION TO AFTER - SALES

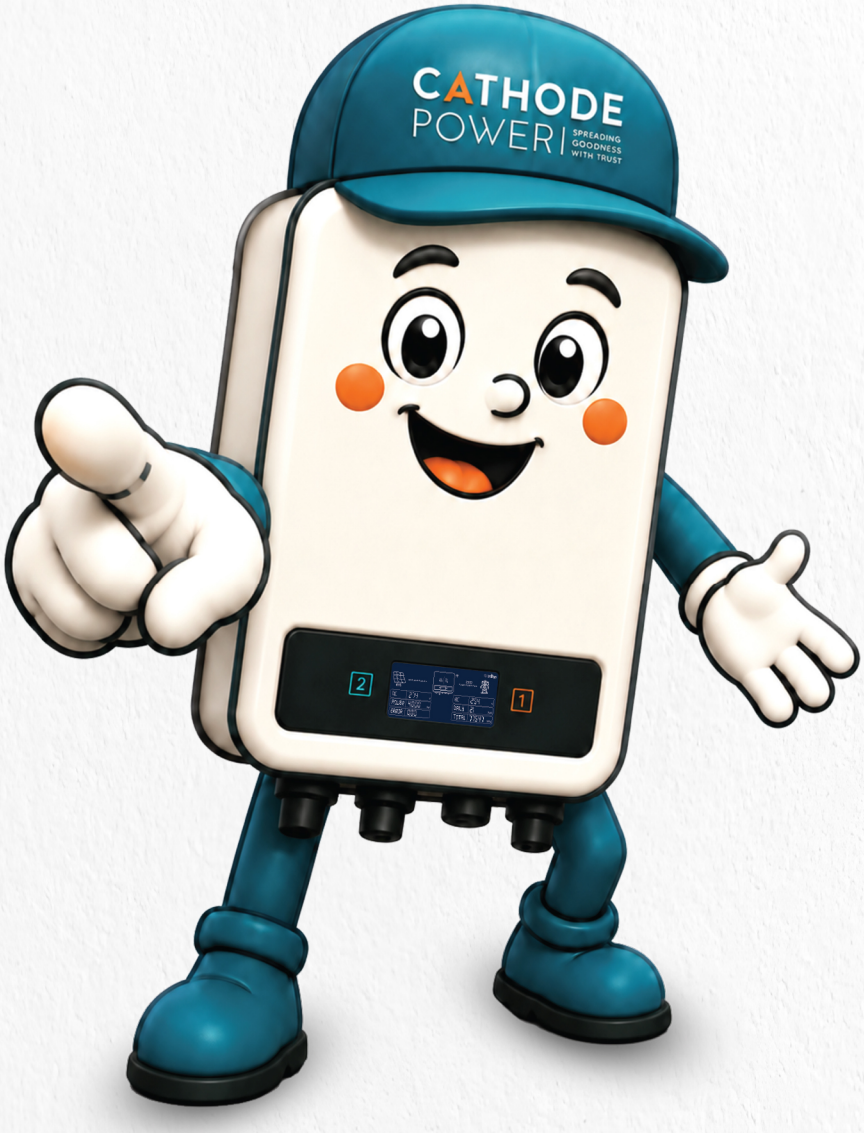

SINGLE PHASE
HYBRID INVERTERS

3 kW | 3.6 kW | 4 kW | 4.4 kW | 5 kW | 6 kW

Compact & Modern Design

Direct Mode Operation

Smart Protection System



Smart Energy Management

Low Maintenance

IP65 Water & Dust Resistance


CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(6G-3.0-HYBDS TO 6G-6.0-HYBDS)

MODEL NO.	6G-3.0-HYBDS	6G-3.6-HYBDS	6G-4.0-HYBDS	6G-4.4-HYBDS	6G-5.0-HYBDS	6G-6.0-HYBDS
PV (DC)						
Max. PV Input Power (Per MPPT)	2.5kWp + 2.5kWp	3kWp + 3kWp	4kWp + 4kWp	4kWp + 4kWp	5kWp + 5kWp	6kWp + 6kWp
Max. Input Voltage	500V					
Start-up Voltage	90V					
MPPT Full Load Voltage Range	235V - 425V	235V - 425V	235V - 425V	235V - 425V	295V - 425V	350V - 425V
MPPT Input Voltage Range	120V - 425V					
MPPT Max. Input Current	18A / 18A					
MPPT Short-Circuit Current	26A					
No. of MPPT	2					
No. of Strings Per MPPT	1					
Battery (DC)						
Max. Charge / Discharge Power	3000W	3600W	4000W	4400W	5000W	6000W
Rated Voltage	24V/48V				48V	
Battery Voltage Range	22V - 60V				40V - 60V	
Max. Charge / Discharge Current	90A	90A	100A	100A	110A	120A
Communication Port	CAN / RS485					
Battery Type	Lead acid/Lithium Batteries/Gel Batteries					
Grid (AC)						
Max. Input Apparent Power**	4000VA	4800VA	5400VA	6000VA	6700VA	8100VA
Rated Output Power (ON Grid)	3000W	3600W	4000W	4400W	5000W	6000W
Max. Output Apparrent Power	3000VA	3600VA	4000VA	4400VA	5000VA	6000VA
Rated AC Voltage	L/N/PE, 230V					
Input/Output Voltage Range	150V - 290V (140V - 310V Optional)					
Rated Output Volatge Frequency	50Hz, Intelligent Adaptive/Settable					
Input/Output Voltage Frequency Range	45Hz - 55Hz					
Max. Input/Output Current	13.05A	15.66A	17.4A	19.14A	21.8A	26.1A
Max. Grid Pass Through Current	30A			40A		
Power Factor (Rated)	>0.99					
Adjustable Power Factor Range	0.8 Leading To 0.8 Lagging					
Total Harmonic Distortion	<3% (Rated Power)					
Grid Type	Single Phase, L+N+PE					
AC Load Output (Off-Grid)						
Rated Output Power	3000W	3600W	4000W	4400W	5000W	6000 W
Rated Output Voltage (L/N/PE)	220V/230V					
Output Voltage Range	200V - 240V					
Rated Output Frequency	50Hz, Intelligent Adaptive/Settable					
Off Grid Overload Capability	101%-110% 30s, >110% 10s					
Total Harmonic Distortion	<3% (R Load)					
On-Grid / Off-Grid Switching Time	<10ms					
Efficiency						
Max. Efficiency	97.6%					
Max. European Efficiency	96.5%					
Max. MPPT Efficiency	99.9%					
Protection						
Integrated Protection	Grid/Battery over & under voltage protection, Grid over & under frequency protection, Output short circuit/ overload protection, PV everse connection alarm, Battery charge & discharge overcurrent protection, Insulation impedance protection, Ground fault protection					
Surge Protection	DC Type II, AC Type I+II					
Display & Communication						
Display	Touchscreen LED + APP					
Communication	RS485, 4G (Optional), WiFi (Optional)					
General Data						
Noise	<55dB					
Dimension (LxWxH) (mm)	320x170x440mm					
Weight		14kg	14.5kg		15kg	
Operating Temperature Range	-25° - 60°C (Greater than 45°C Derating)					
Humidity	0-100%					
Altitude	3000m (>2000m derating)					
Cooling	Intelligent Air Cooling (IP68)					
Installation Style	Wall Mounted					
Protection Rating	IP65					
Warranty	5 Years Warranty					

CATHODE POWER | SPREADING GOODNESS WITH TRUST

PAN INDIA PRESENCE

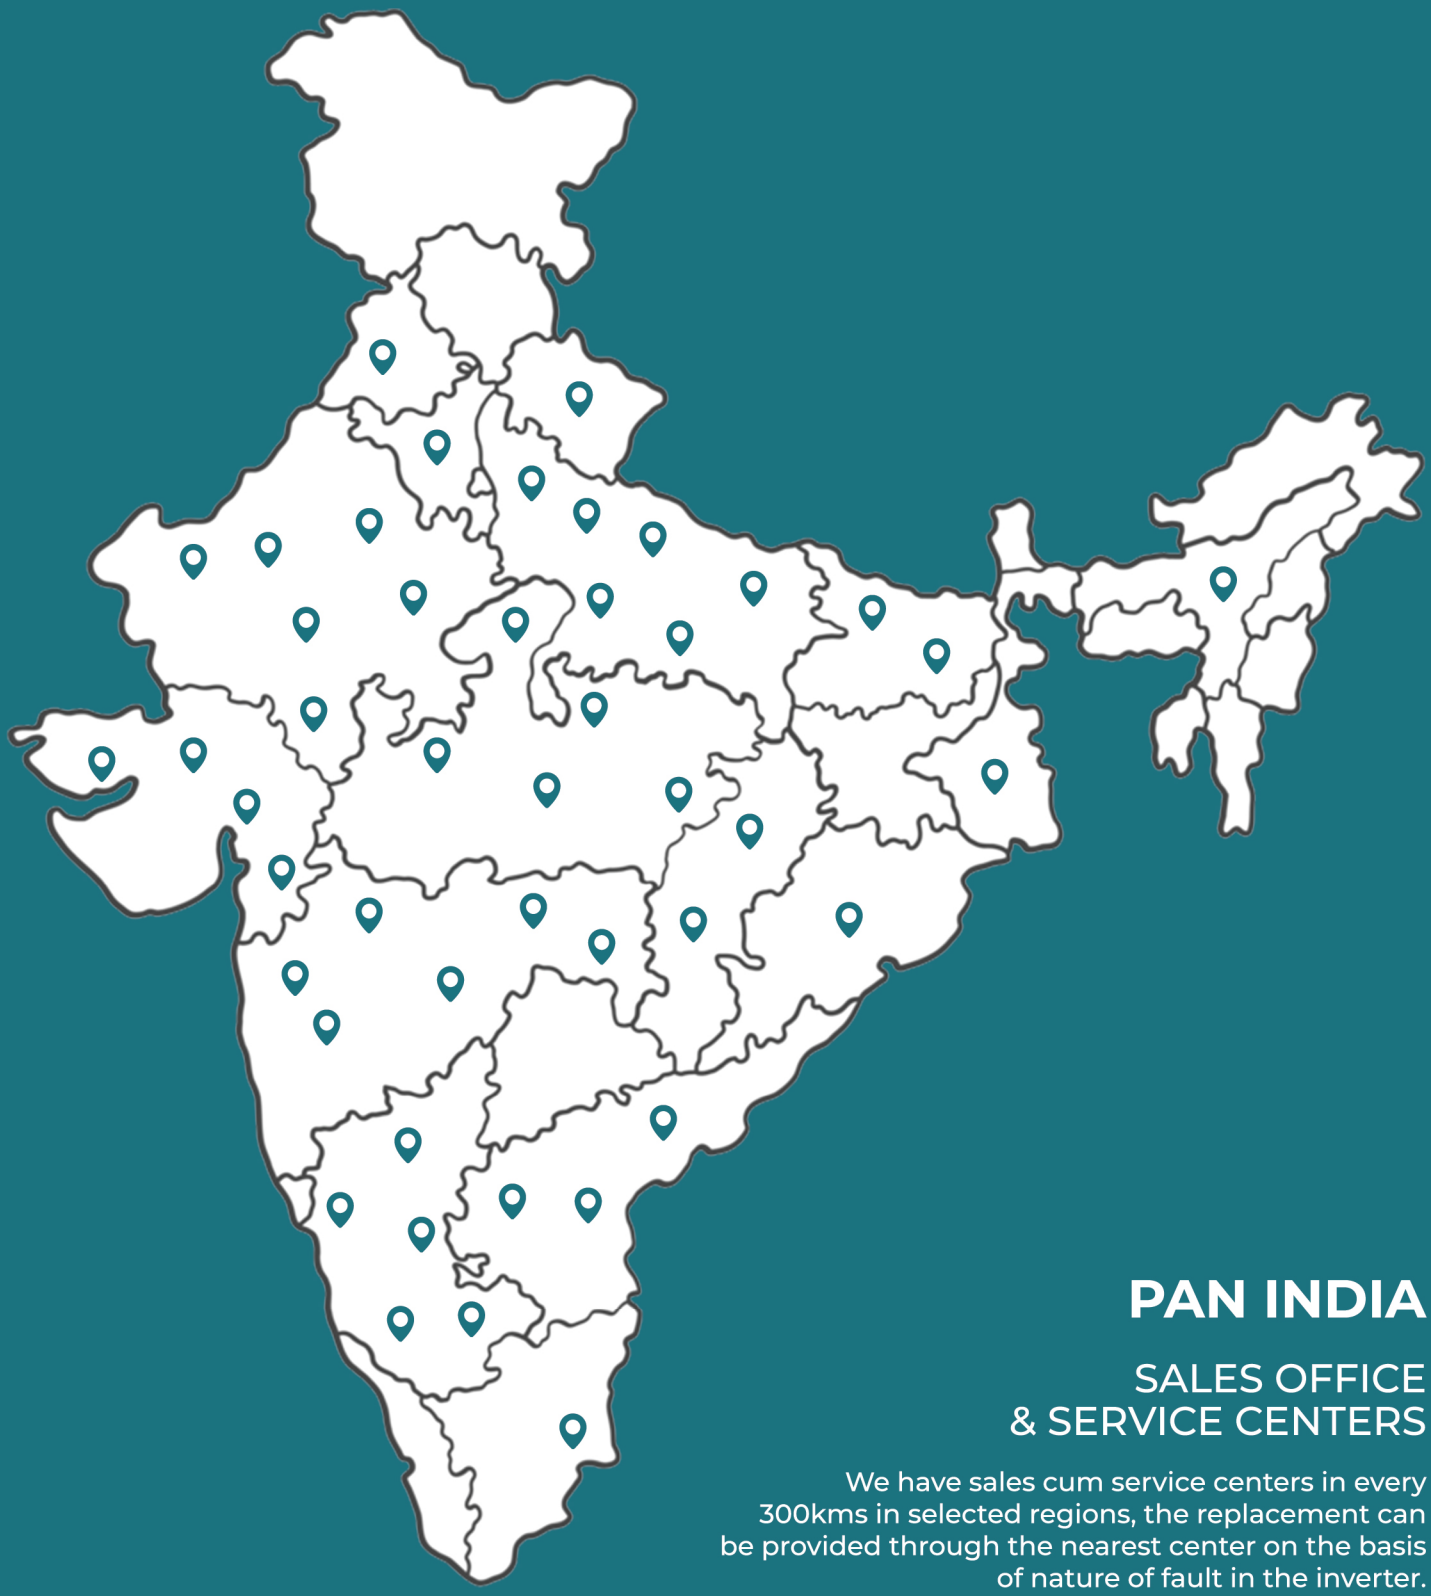

PAN INDIA

SALES OFFICE & SERVICE CENTERS

We have sales cum service centers in every 300kms in selected regions, the replacement can be provided through the nearest center on the basis of nature of fault in the inverter.

#YEHSWADESHIHAI

CATHODE® POWER

SPREADING GOODNESS WITH TRUST

Cathode Power Private Limited.

Corporate Office: SF 201-203, Fortune Platinum, Nr. Tulsidham Circle, Manjalpur, Vadodara, Gujarat - 390011

Factory Address: R.S. No.229, Sugar Factory, Ta. Karjan, Opp. Gandhara, Gandhara, Gujarat-391210

Contact: +91 98002 68002

Email: hello@cathodepower.com

Website: www.cathodepower.com