
CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

SMART • RELIABLE • EFFICIENT

No.1 Choice of Solar EPCs Across India

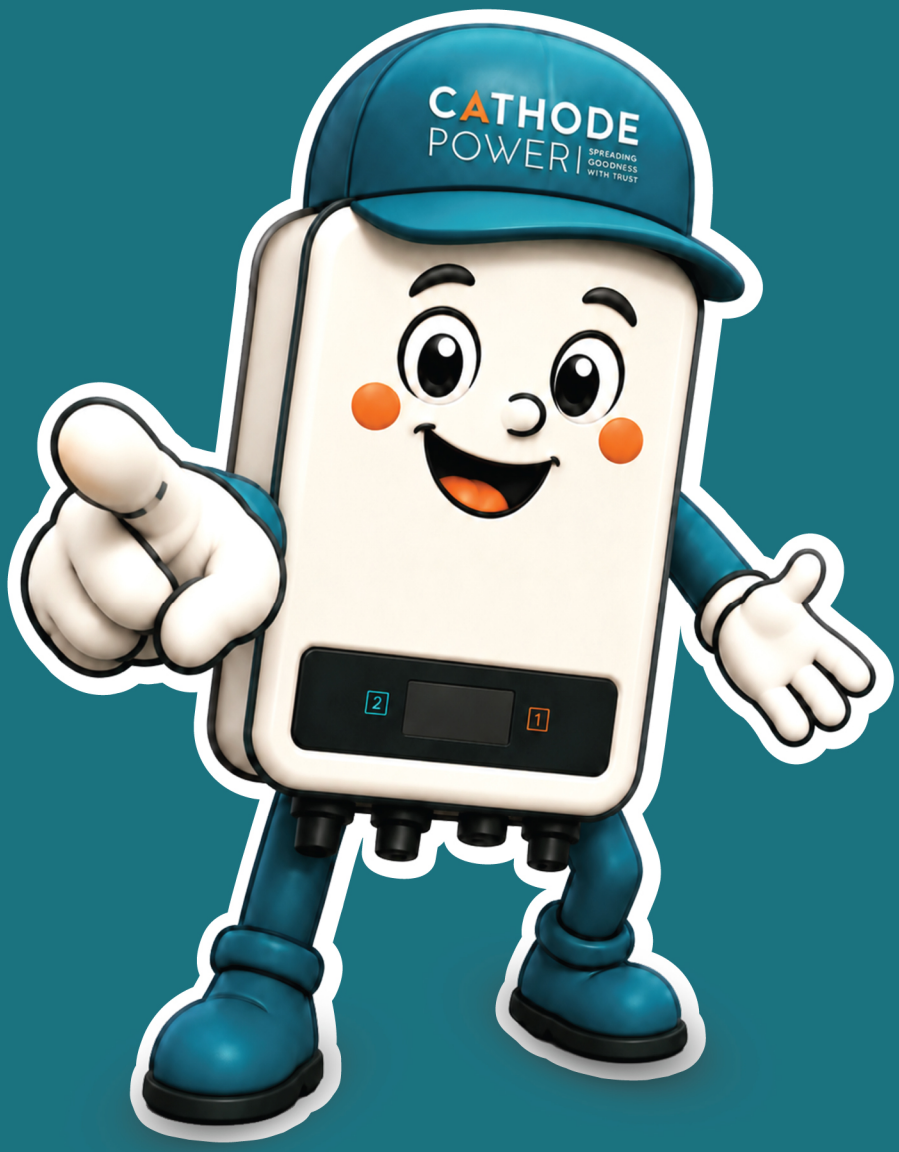


CATHODE POWER | SPREADING GOODNESS WITH TRUST

Empowering Epcs To Build A Sustainable Future With Smart, Efficient & Reliable Inverter Solutions.

On-Grid | Hybrid | Micro | BESS


WHO'S GOT YOUR BACK ON EVERY INSTALLATION?

YOUR POWER PARTNER FROM INSTALLATION TO AFTER - SALES

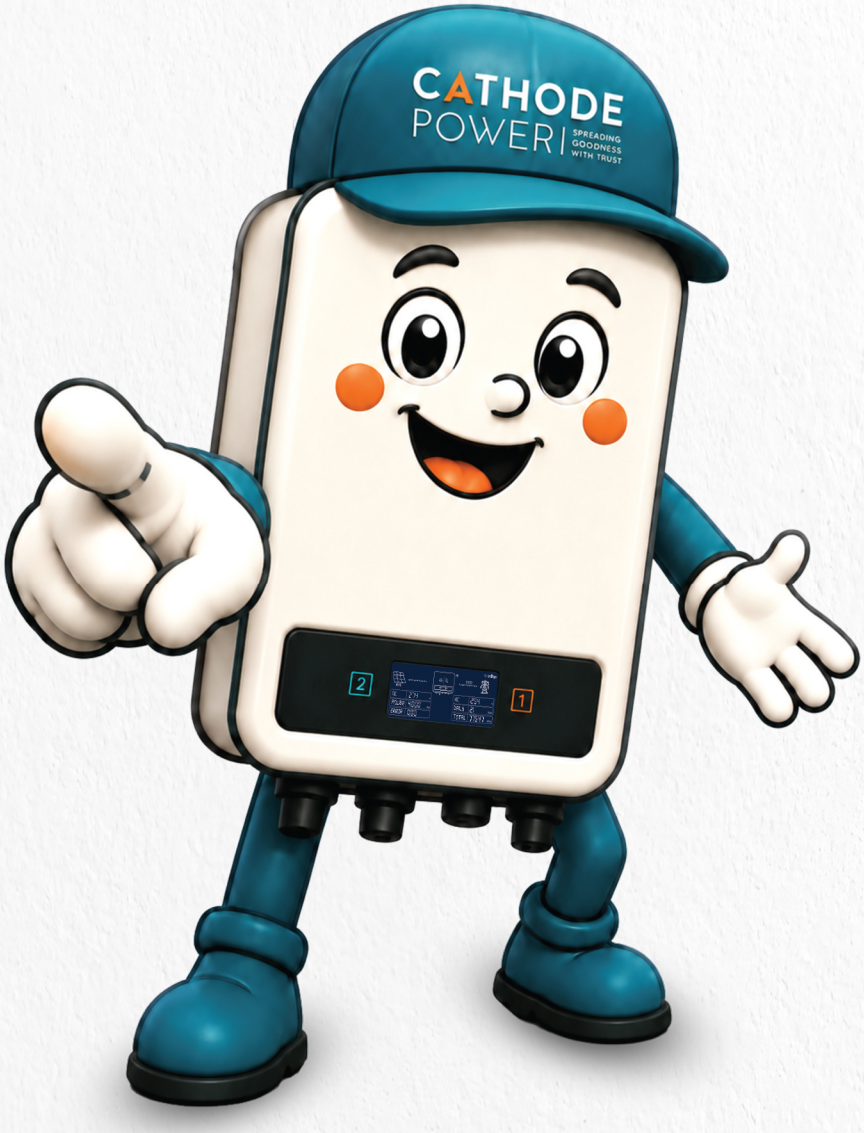

THREE PHASE
SOLAR GTI

30 kW | 33 kW | 36 kW | 40 kW | 45 kW | 50 kW

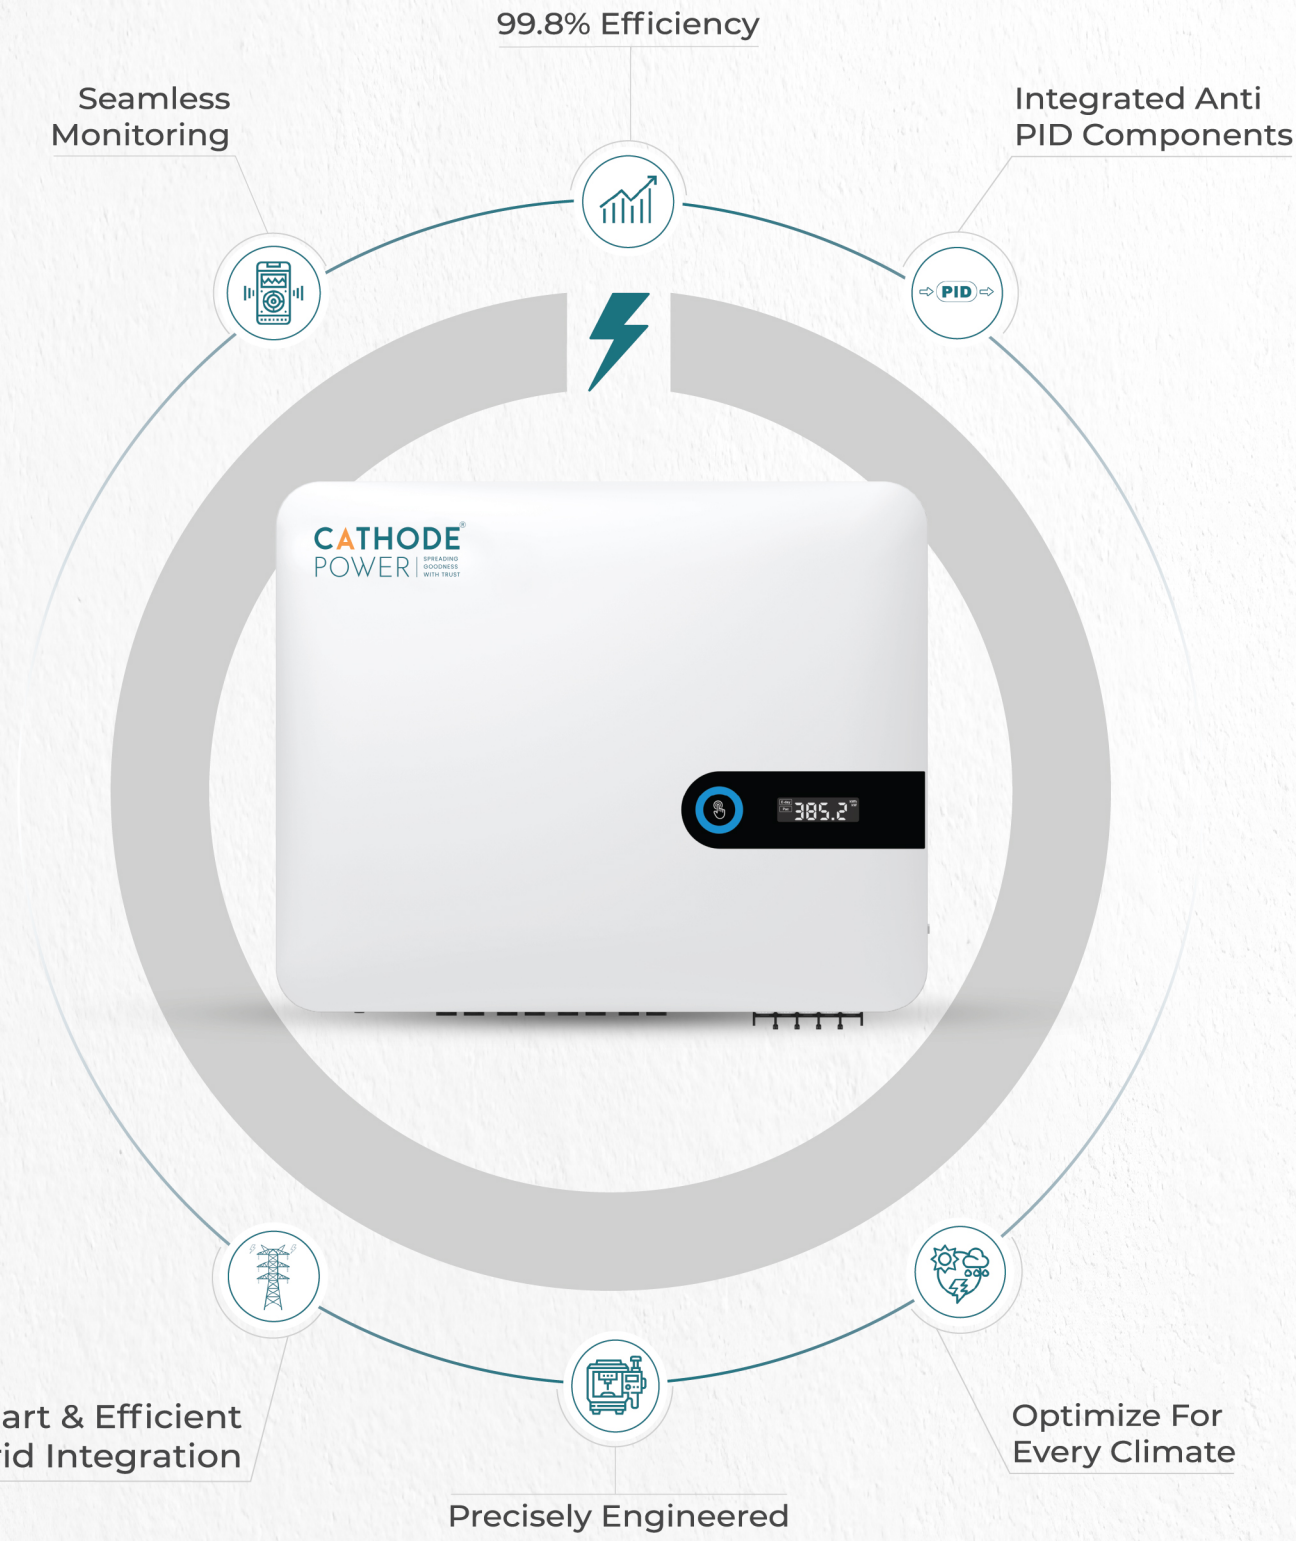


CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP30HL TO CP50HL)

MODEL NO.	CP30HL	CP33HL	CP36HL	CP40HL	CP45HL	CP50HL
DC Side | Input Parameters						
Max. Input Power	36kWp	40kWp	43.2kWp	48kWp	54kWp	60kWp
Max. P.V. Power (Per MPPT)	12kWp	13.5kWp	15kWp	16kWp	14kWp	15kWp
Max. DC Voltage	1100V					
Start-up Voltage	180V					
Nominal Voltage	600V					
MPPT Voltage Range	200V - 900V					
No. of MPP Trackers	3	3	3	3	4	4
No. of PV Strings Per MPP Tracker	2					
Max. Input Current Per MPP Tracker	32A					
Max. Input Short-Circuit Current Per MPPT	40A					
AC Side | Output Parameters						
AC Nominal Output Power	30kW	33kW	36kW	40kW	45kW	50kW
Max. AC Apparent Power	33kVA	36kVA	39.6kVA	44kVA	49.5kVA	55kVA
Nominal AC Voltage L-N / L-L (Range*)	230V / 400V (290V - 490V)					
AC Grid Frequency (Range*)	50Hz (45Hz - 55Hz)					
Max. Output Current (PF=0.9)	48.3A	54.5A	60A	66.7A	75.04A	84.1A
Adjustable Power Factor	>0.99, 0.8 Leading To 0.8 Lagging					
TDHi	<3%					
AC Grid Connection Type	3L/N/PE or 3L/PE					
Efficiency						
Maximum Efficiency	98.5%					
European Efficiency	98.2%					
MPPT Efficiency	99.9%					
Safety & Protection						
Anti-Flow Protection	OPTIONAL					
DC Switch	YES					
DC Reserve Polarity Protection	YES					
AC / DC Surge Protection	TYPE I + II / TYPE II					
Insulation Resistance Monitoring	YES					
AC Short - Circuit Protection	YES					
Grid Monitoring	YES					
Anti-islanding Protection	YES					
Residual-Current Monitoring Unit (GFCI)	YES					
String Fault Monitoring	YES					
AFCI Protection	OPTIONAL					
Anti PID Function	YES					
General Parameters						
Noise	<50dB					
Dimension (LxWxH) (mm)	590/480/237mm					
Weight (Kg)	32 kg			34 kg		35 kg
Operating Temperature Range	-25°C To +60°C (>45°C Derating)					
Relative Humidity	0-100%					
Altitude	4000m (>3000m Derating)					
Self-Consumption At Night	<4w					
Topology	Non-Isolated/Transformerless					
Cooling	Intelligent Air Cooling					
Protection Degree	IP66					
DC Connection	H4 / MC4 (Optional)					
AC Connection	Lug Connector					
Warranty	10 Years					
Display	LED					
Communication Interface	Yes: RS 485/USB/Bluetooth, Optional: 4G/WI-FI					

CATHODE POWER | SPREADING GOODNESS WITH TRUST

PAN INDIA PRESENCE

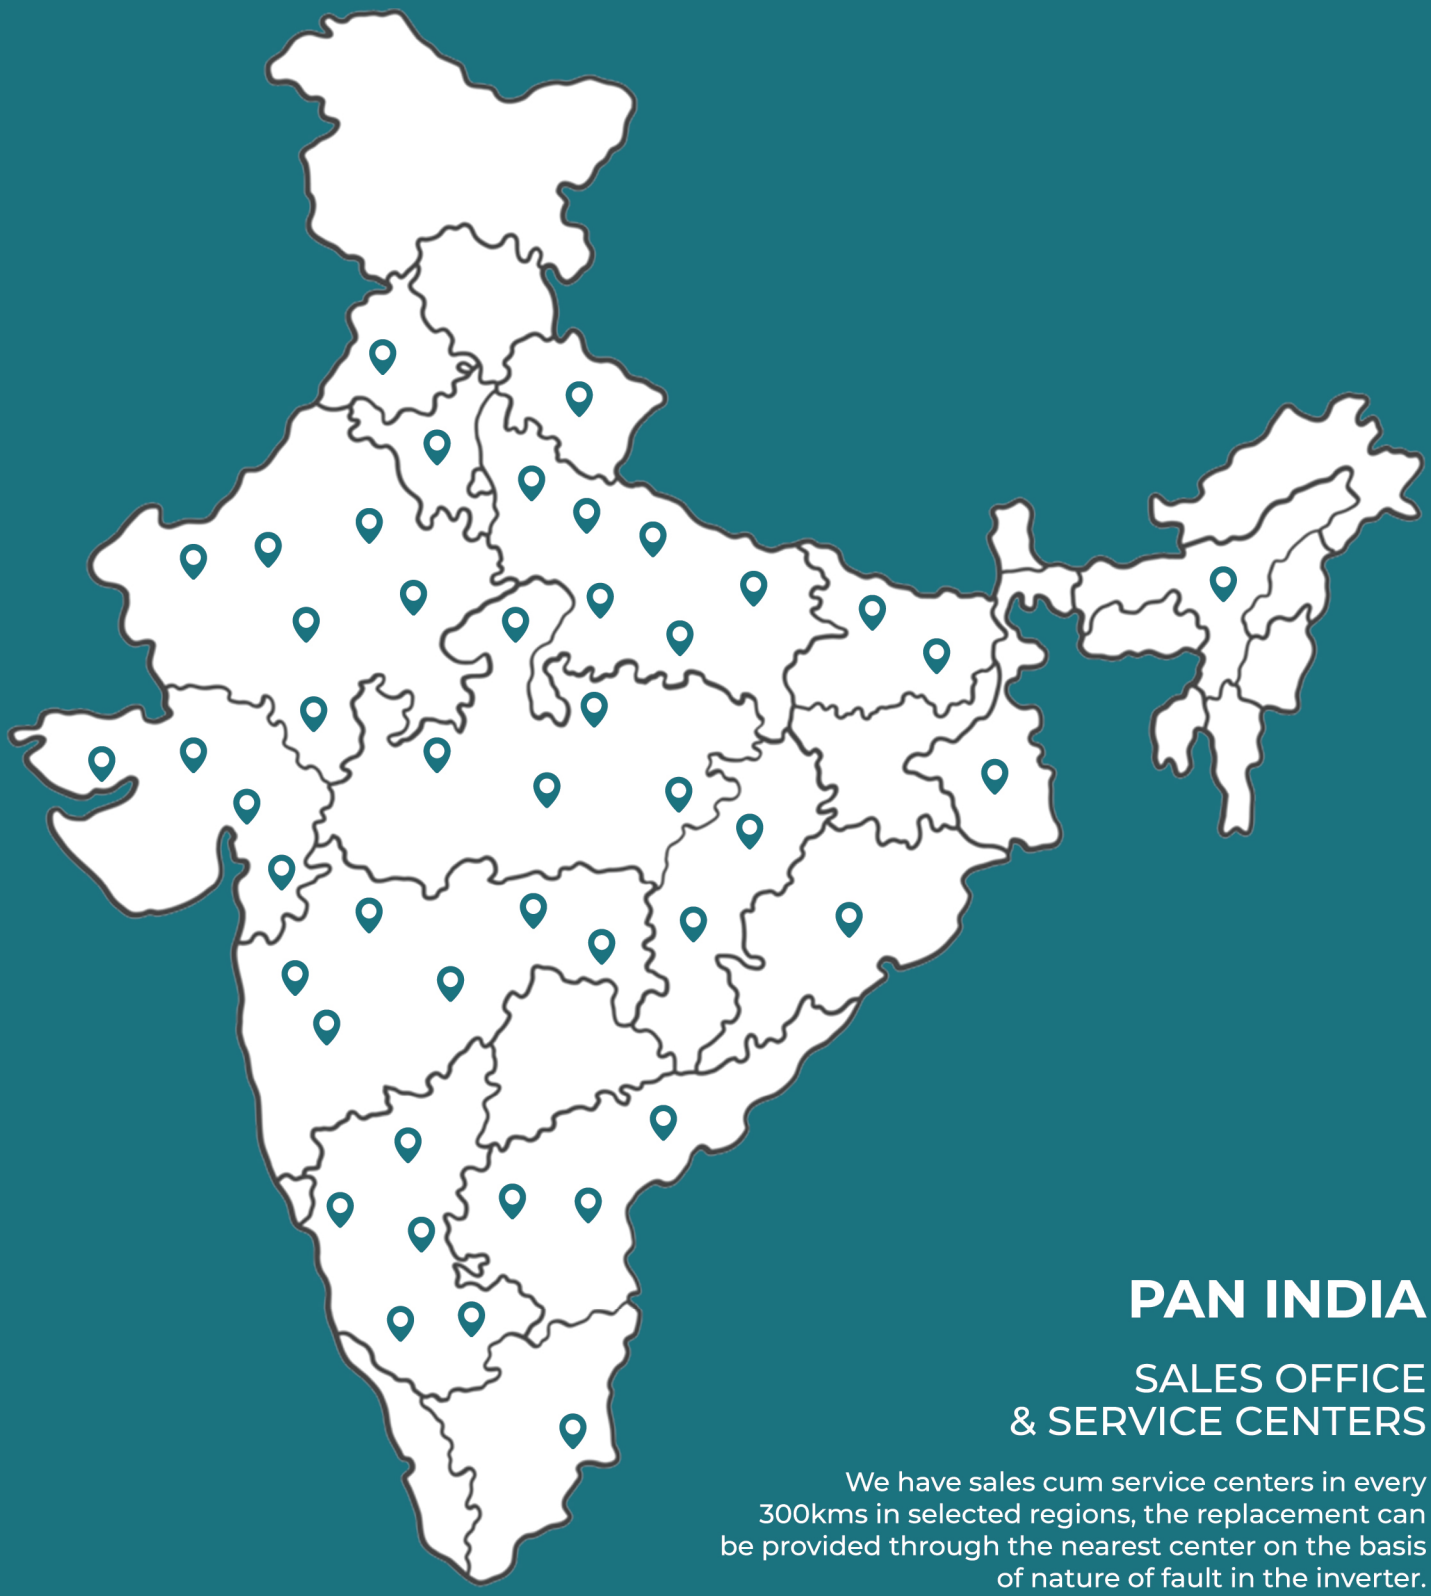

PAN INDIA

SALES OFFICE & SERVICE CENTERS

We have sales cum service centers in every 300kms in selected regions, the replacement can be provided through the nearest center on the basis of nature of fault in the inverter.

#YEHSWADESHIHAI

CATHODE® POWER

SPREADING GOODNESS WITH TRUST

Cathode Power Private Limited.

Corporate Office: SF 201-203, Fortune Platinum, Nr. Tulsidham Circle, Manjalpur, Vadodara, Gujarat - 390011

Factory Address: R.S. No.229, Sugar Factory, Ta. Karjan, Opp. Gandhara, Gandhara, Gujarat-391210

Contact: +91 98002 68002

Email: hello@cathodepower.com

Website: www.cathodepower.com