
CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

SMART • RELIABLE • EFFICIENT

No.1 Choice of Solar EPCs Across India

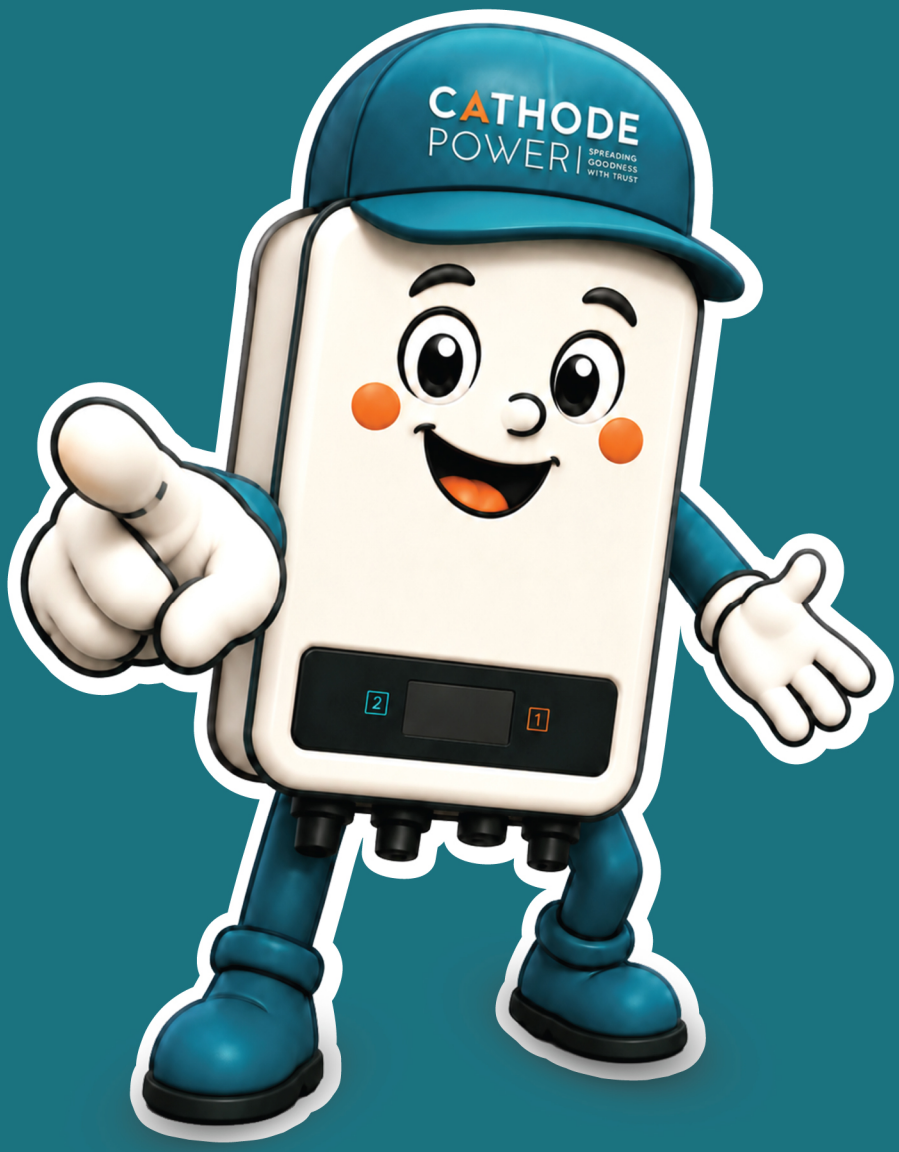


CATHODE POWER | SPREADING GOODNESS WITH TRUST

Empowering Epcs To Build A Sustainable Future With Smart, Efficient & Reliable Inverter Solutions.

On-Grid | Hybrid | Micro | BESS


WHO'S GOT YOUR BACK ON EVERY INSTALLATION?

YOUR POWER PARTNER FROM INSTALLATION TO AFTER - SALES

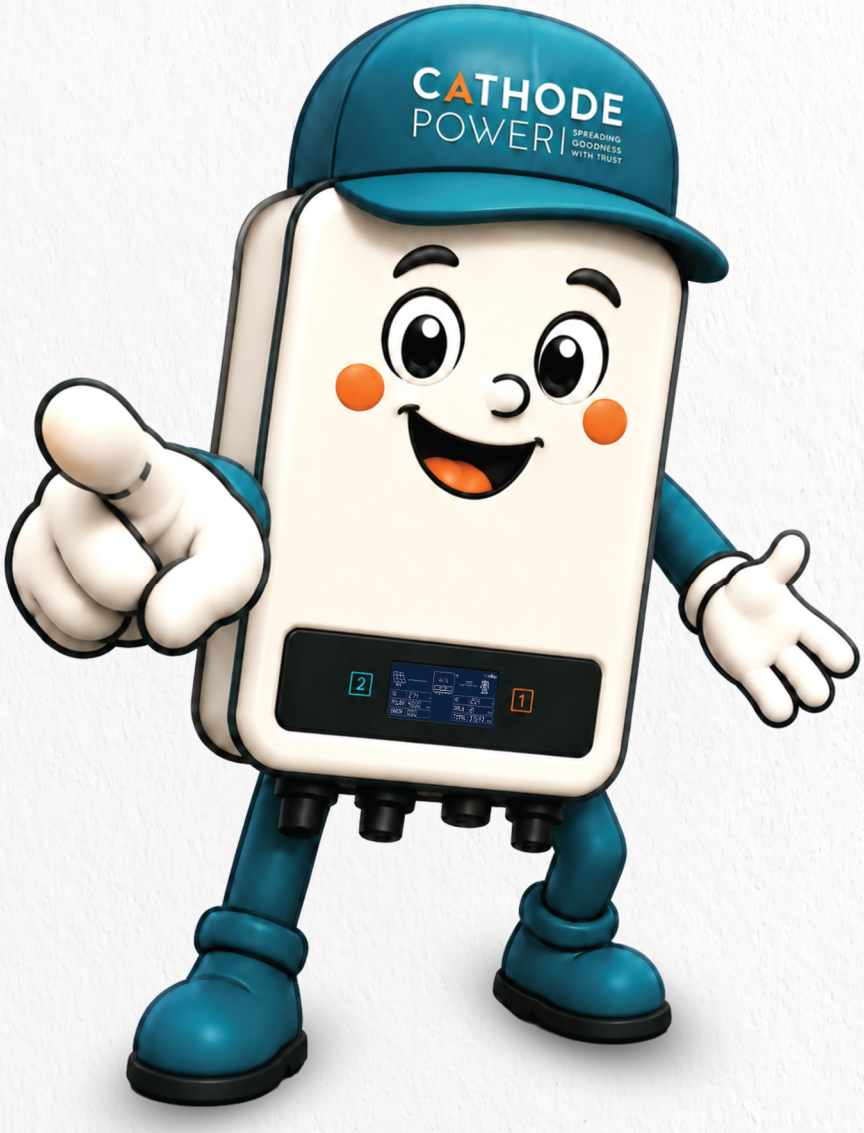

SINGLE PHASE
SOLAR GTI

4.4kW | 4.8kW | 5kW | 5.3kW | 5.5kW | 6kW

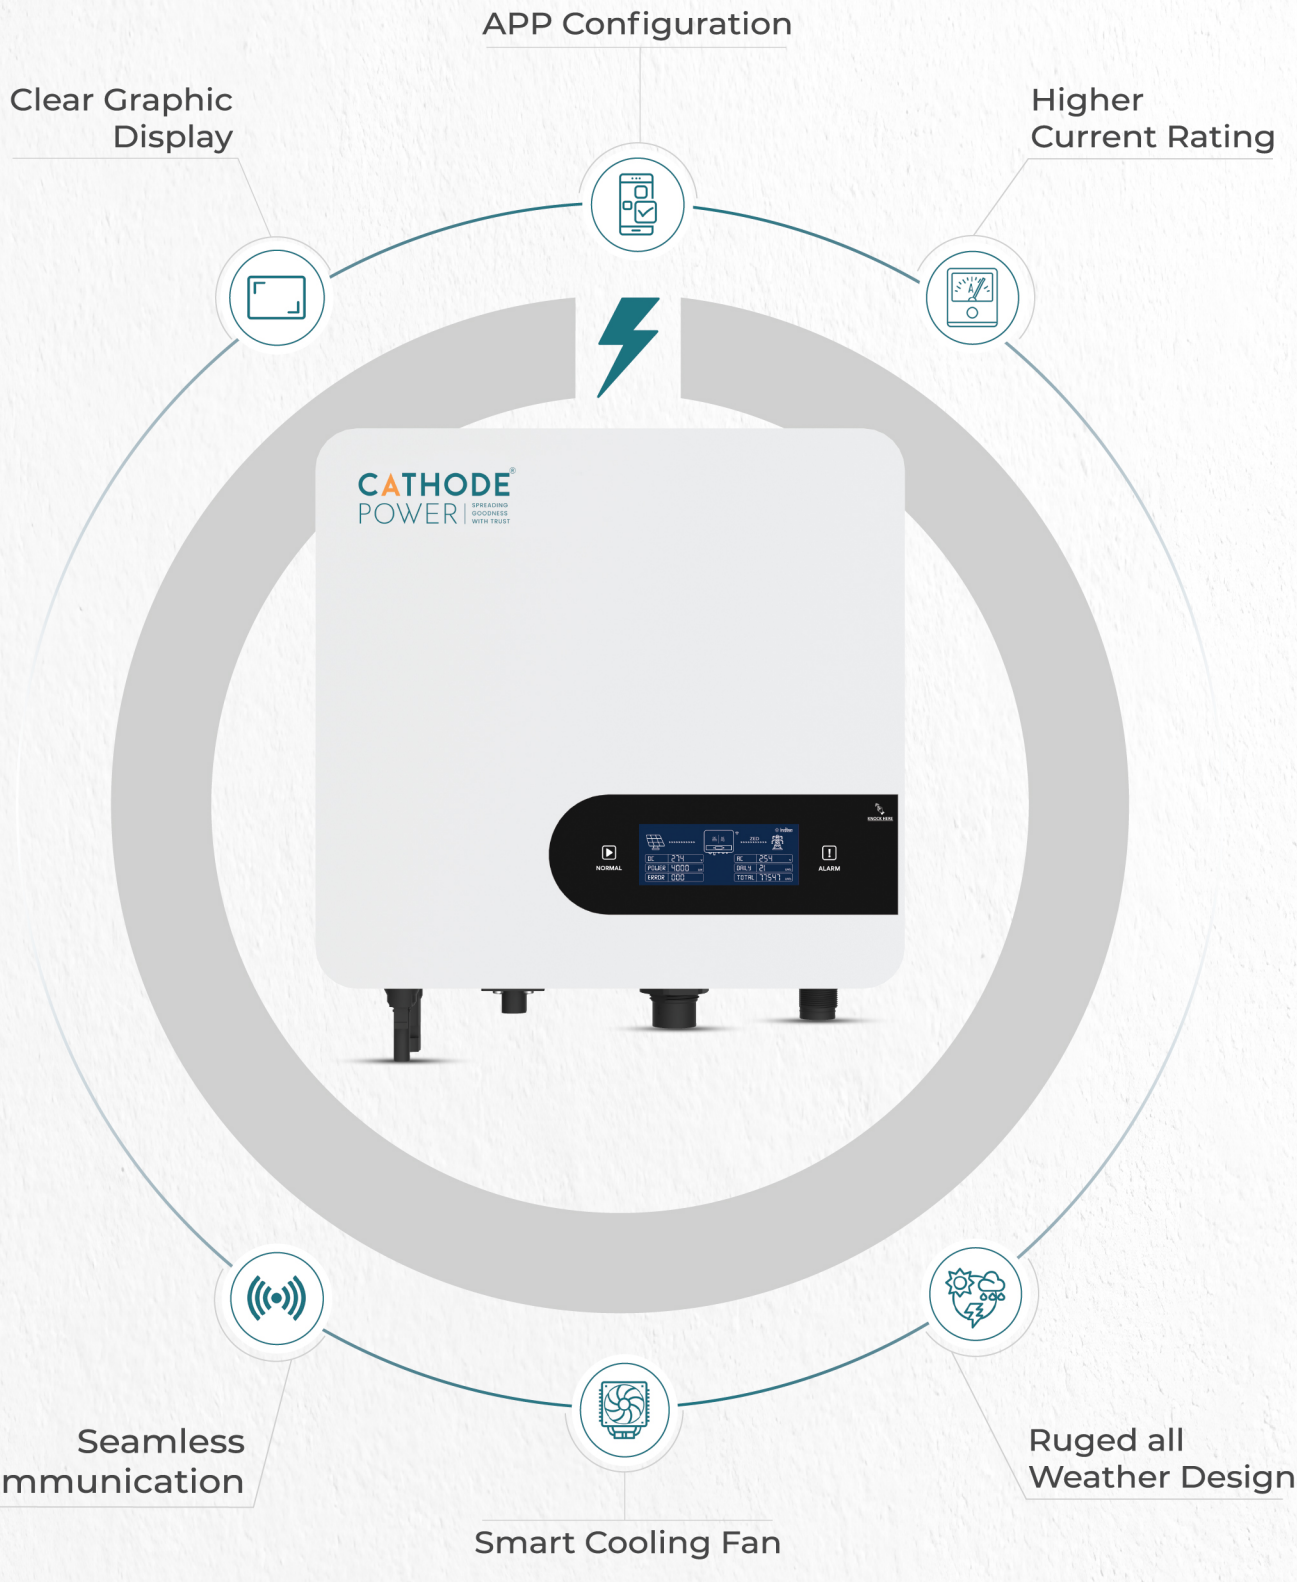


CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-4400L TO CP-6000L)

MODEL NO.	CP-4400L	CP-4600L	CP-4800L	CP-5000L	CP-5300L	CP-5500L	CP-6000L
DC Side | Input Parameters							
Max. Allowable DC Voltage (VDC) | Max. DC Voltage (VDC)	420/550V	420/550V	500/550V	550/550V	550/550V	550/550V	550/550V
Min. System Start | Shut Down Voltage (VDC)	45V	45V	45V	45V	45V	45V	45V
Max. Input Current (A)	22A	22A	22A	22A	22A	22A	22A
Max. Short Circuit I/p Current Per MPPT	30A	30A	30A	30A	30A	30A	30A
Number of MPP Tracker | Total Nos. Of String	1/1	1/1	1/1	1/1	1/1	1/1	1/1
Input Terminal Type	MC4						
AC Side | Output Parameters							
Rated Output Power (W)	4400W	4600W	4800W	5000W	5300W	5500W	6000W
Maximum Output Power (VA)	4400VA	4600VA	4800VA	5000VA	5300VA	5500VA	6000VA
Nominal Output Voltage/Range (V)	L/N/PE,240/140-310Vac						
AC Grid Frequency/Range (Hz)	50Hz / 45Hz-55Hz						
Max. Output Current (A)	18.3A	19.1A	20A	20.8A	22A	23A	28A
AC Connection (With PE)	Single Phase						
Current Distortion (THDi)	<1.5%	<1.5%	<1.5%	<1.5%	<1.5%	<1.5%	<1.5%
Power Factor	>0.99 (Adjustable From 0.8 Leading To 0.8 Lagging)						
Efficiency							
Maximum Conversion Efficiency	99.7%	99.3%	98.3%	98.4%	98.5%	98.8%	98.9%
European Efficiency	98.3%	98%	98.1%	98.2%	98.2%	98.3%	98.1%
MPPT Efficiency	98.7%	98.7%	98.7%	98.5%	99.8%	98.9%	98.6%
Safety & Protection							
DC Reverse-Polarity Protection	YES						
Anti-Islanding / Overvoltage Protection	YES						
Shortcut Circuit Protection	YES						
Leakage Current Protection	YES						
Grid Monitoring / Ground Fault Monitoring	YES						
DC/AC Side SPD (Thermally Protected)	YES | TYPE I + II						
General Parameters							
Dimension (L/W/H) (mm)	340/290/127mm						
Weight (Kg)	8KG						
Embedded DC Switch	Optional						
Zero Export Function	Optional						
Night Power Consumption (W)	<0.2						
Isolation Type	Transformerless						
Technology	Heric						
Protection Degree	IP65 According To IEC60529						
Operation Temperature (°C)	-25 - +60						
Cooling Concept	PWM Technology, Auto RPM | Natural Convection + Fan Cooling (12000 RPM)						
Operating Altitude (M)	<2000m Without Power Derating						
Acoustic Noise Level (DB)	<35 DB						
Display	Graphic LCD						
Communication Interface	Standard WIFI; RS485 (Optional)						
Warranty	10 Years ; 25 Years For Optional						

CATHODE POWER | SPREADING GOODNESS WITH TRUST

PAN INDIA PRESENCE

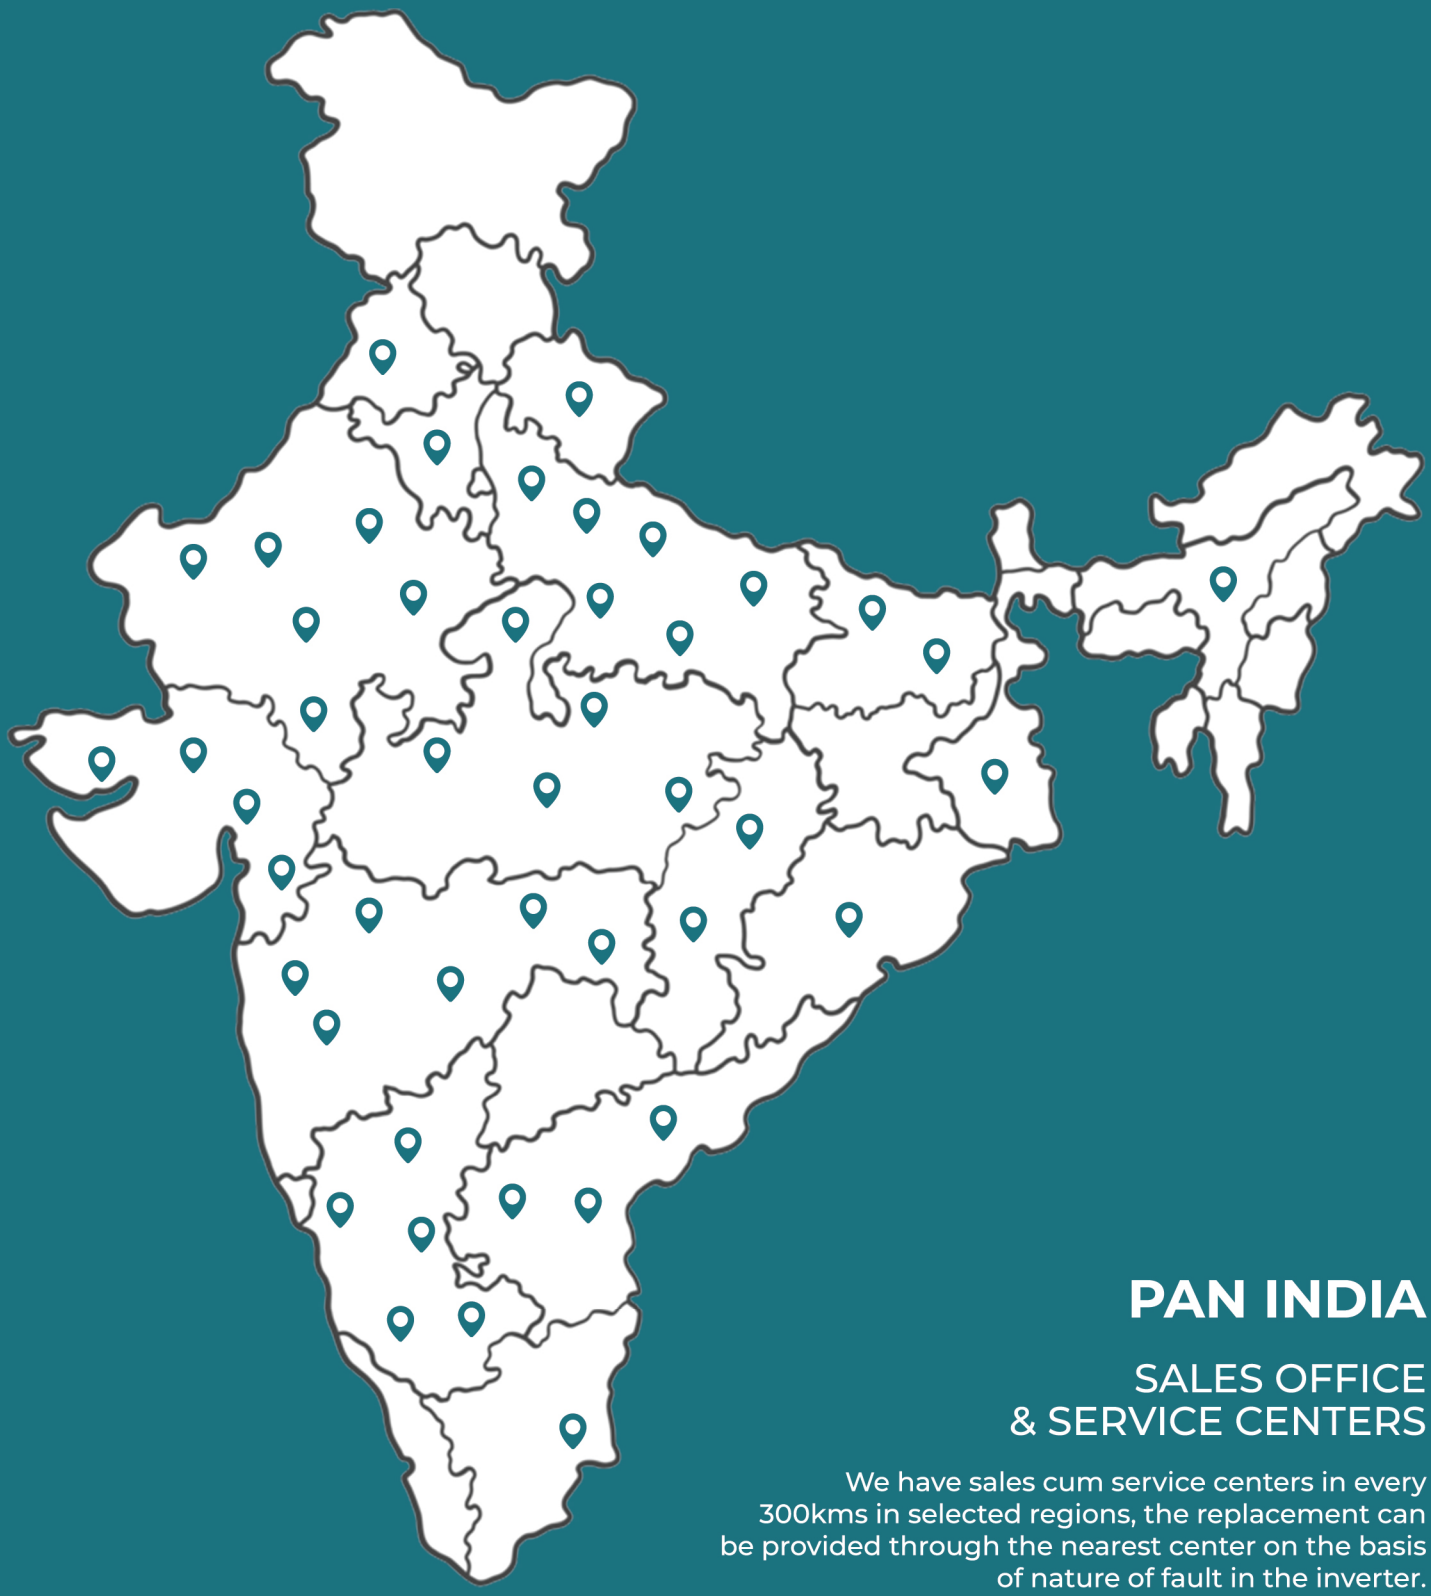

PAN INDIA

SALES OFFICE & SERVICE CENTERS

We have sales cum service centers in every 300kms in selected regions, the replacement can be provided through the nearest center on the basis of nature of fault in the inverter.

#YEHSWADESHIHAI

CATHODE® POWER

SPREADING GOODNESS WITH TRUST

Cathode Power Private Limited.

Corporate Office: SF 201-203, Fortune Platinum, Nr. Tulsidham Circle, Manjalpur, Vadodara, Gujarat - 390011

Factory Address: R.S. No.229, Sugar Factory, Ta. Karjan, Opp. Gandhara, Gandhara, Gujarat-391210

Contact: +91 98002 68002

Email: hello@cathodepower.com

Website: www.cathodepower.com