CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

SMART • RELIABLE • EFFICIENT

No.1 Choice of Solar EPCs Across India

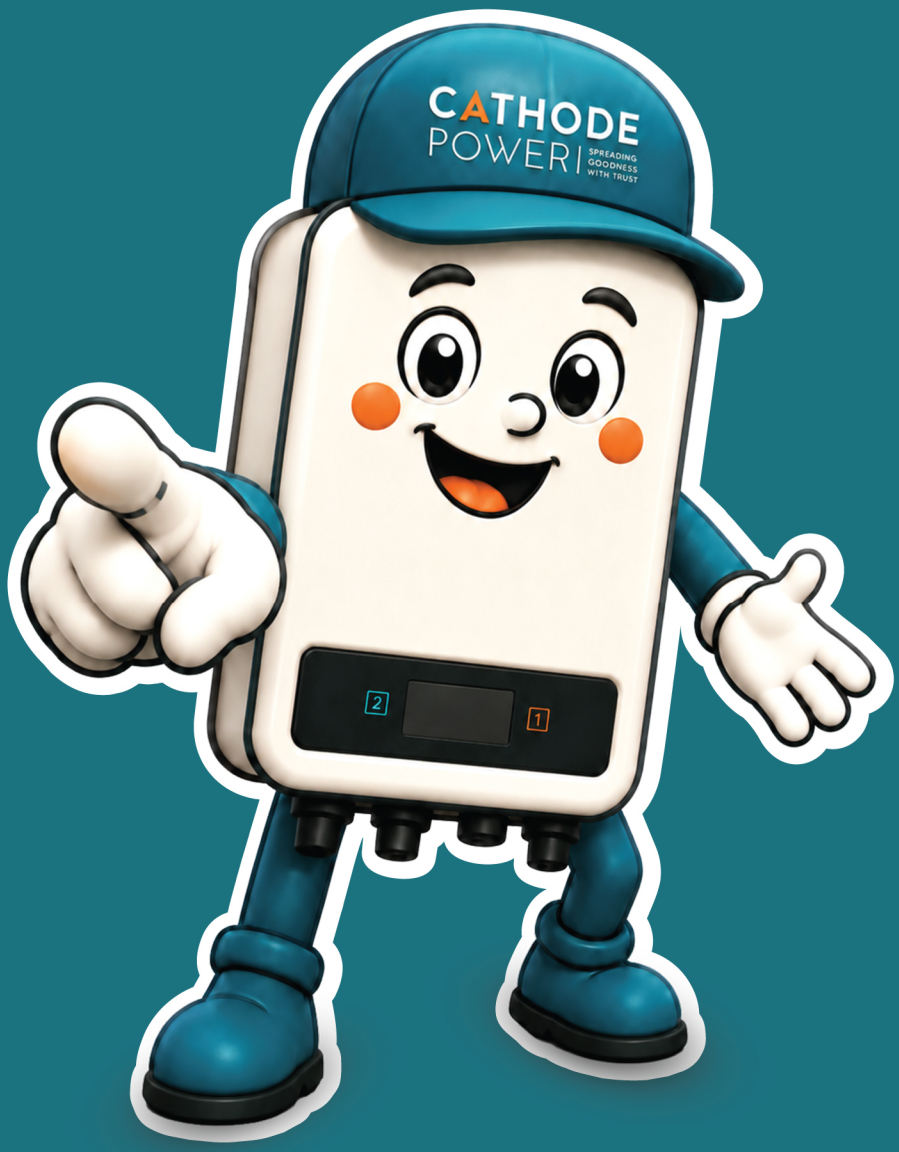

CATHODE POWER | SPREADING GOODNESS WITH TRUST

Empowering Epcs To Build A Sustainable Future With Smart, Efficient & Reliable Inverter Solutions.

On-Grid | Hybrid | Micro | BESS

WHO'S GOT YOUR BACK ON EVERY INSTALLATION?

YOUR POWER PARTNER FROM INSTALLATION TO AFTER - SALES

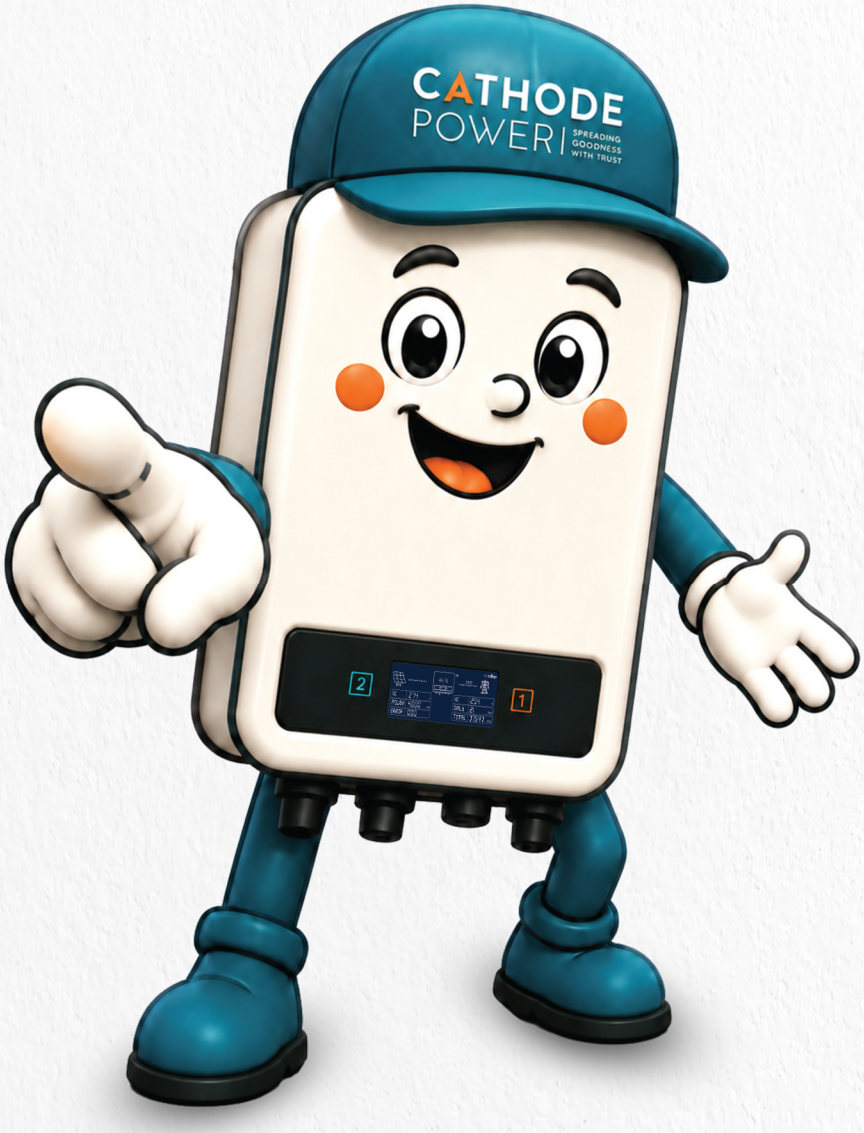

OUR **STORY**

20%+
R&D Investement / Revenue

12+
R&D Staff

24/7
Customer Support

100+
Local Professionals

500+
Service Partners

2021.
Incorporated on 27th October with a bold vision to make clean energy accessible.

2022.
Established in-house manufacturing facility launched first product range.

2023.
Opened corporate office strengthened operations and dealer network.

2024.
Expanded workforce to 100+ staff in manufacturing and 30-40 staff in corporate office introduced advanced inverter models.

2025.
Recognized as one of India's fastest-growing solar inverter brands trusted by solar EPCs nationwide.

2026.
Expanding product portfolio in domain of Hybrid Inverters & BESS.

WHY **CATHODE POWER?**

At Cathode Power Pvt. Ltd., we are redefining the way India experiences solar energy. As one of India's top leading solar inverter manufacturing companies, we specialize in delivering high-efficiency, which makes our Inverter suitable for everyone.

AFFORDABLE

We believe clean energy should be accessible to all. Our Made-in-India solar inverters are designed to offer maximum efficiency at competitive prices, making solar adoption easier and more cost-effective for homes and businesses across India.

RELIABLE

Recognized as one of India's top solar inverter manufacturers, we deliver products that consistently perform in diverse Indian conditions. From residential rooftops to large commercial installations, our inverters are built for long-term reliability, stability, and superior energy output.

SUSTAINABLE

Sustainability is at the heart of everything we do. Our inverters are engineered to support India's clean energy goals by reducing dependence on traditional power sources and enabling users to harness solar energy efficiently and responsibly.

DEPENDABLE

With a PAN India presence and a strong network of support and service partners, Cathode Power is a brand you can count on. Our commitment to quality, customer satisfaction, and continuous innovation makes us a dependable partner in your solar journey.

UNIQUE SELLING PROPOSITION

- Precision Tested Reliability
- Robust All Weather Design
- Smart Thermal Management
- True MPPT Performance
- Real Time Diagnostic Suit
- Advance HERIC Topology

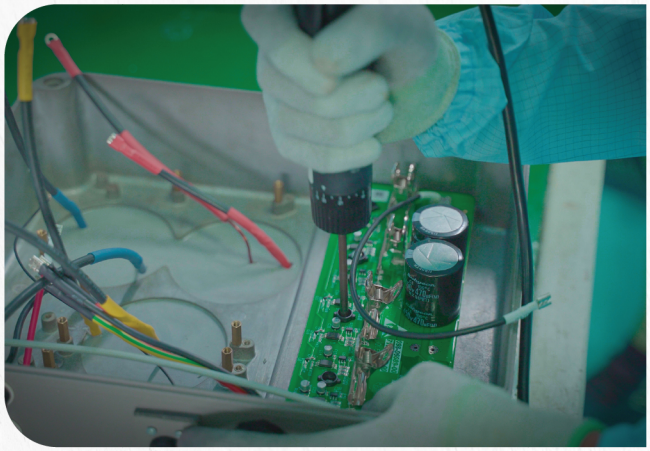

ASSEMBLY VERIFICATION

Every inverter goes through meticulous checks during assembly to ensure component integrity and system compatibility.

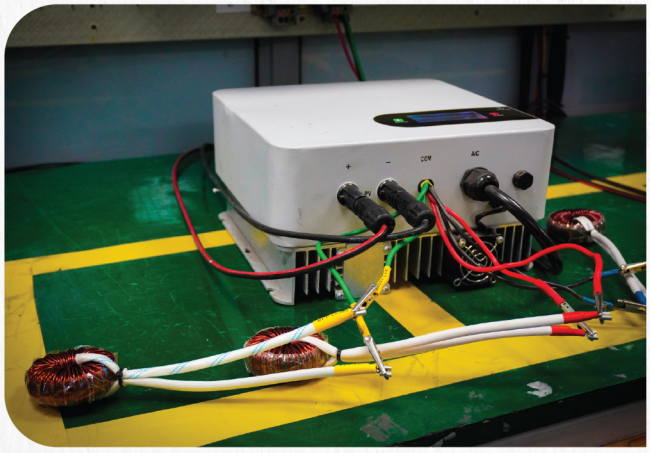

IMPULSE WINDING TEST

Applies high voltage pulses to winding systems to assess their response and identify manufacturing flaws.

AGEING TEST

Subjects the inverter to prolonged stress cycles to simulates long term operation and highlight premature failure risks.

HEAT RUN TEST

Monitor the inverter’s thermal performance under full load to ensure safe operating temperatures.

IV CURVE

Simulates real-world solar panel behavior to assest MPPT (Maximum Power Point Tracking) Performance & Efficiency.

EFFICIENCY TEST

Measures the conversion efficiency from DC (solar) to AC (grid/home), ensuring minimal energy loss.

HIGH VOLTAGE INSULATION TEST

Assesses the insulation resistance at high to verify safety & compliance with global standards.

INDUCTOR FUNCTIONALITY TEST

Verifies the Performance of magnetic components under varying load condition to prevent functional degradation.

Why Hybrid?

Hybrid Solar Inverter is the perfect choice for locations where you want clean solar power without depending on the grid or batteries. It directly converts solar energy into usable AC power, running your appliances in real time under sunlight. This means zero electricity cost during the day, no storage maintenance, and a greener energy footprint. It's ideal for homes, shops, and businesses looking for a cost-effective, maintenance free solar solution.

How Hybrid Solar Inverter Works?

- Solar Power Generation – Solar panels capture sunlight and produce DC electricity.
- Direct Conversion – The hybrid inverter converts DC into AC instantly.
- Immediate Usage – AC power is sent directly to your appliances without the need for batteries or grid connection.
- Daytime Operation – The system works efficiently only under sunlight, ensuring maximum energy utilization during the day.

This direct-feed technology ensures simpler installation, lower costs, and zero battery maintenance, making it one of the most efficient ways to use solar energy.

- Higher Power Range
- SCT (Smart Cooling Tech)
- All Weather Design
- Real Time Monitoring

SINGLE PHASE
SOLAR GTI

2kW | 2.3kW | 3kW | 3.4kW | 3.6kW | 4kW

Deep Draw Technology

Built to Perform in Extreme Heat

Compact & Efficient

Sic + Heric Technology

IP66 Rated

Live Monitoring

CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(6G-2000LS TO 6G-4000LS)

MODEL NO.	6G-2000LS	6G-2300LS	6G-3000LS	6G-3400LS	6G-3600LS	6G-4000LS
DC Side | Input Parameters						
Max. Allowable DC Voltage (VDC) | Max. DC Voltage (VDC)	275/550V	275/550V	320/550V	320/550V	320/550V	385/550V
Min. System Start | Shut Down Voltage (VDC)	45V	45V	45V	45V	45V	45V
Max. Input Current (A)	20A	20A	20A	20A	20A	20A
Max. Short Circuit I/p Current Per MPPT	30A	30A	30A	30A	30A	30A
Number of MPP Tracker | Total Nos. Of String	1/1	1/1	1/1	1/1	1/1	1/1
Input Terminal Type	MC4					
AC Side | Output Parameters						
Rated Output Power (W)	2000W	2300W	3000W	3400W	3600W	4000W
Maximum Output Power (VA)	2000VA	2300VA	3000VA	3400VA	3600VA	4000VA
Nominal Output Voltage/Range (V)	L/N/PE,240/140-310Vac					
AC Grid Frequency/Range (Hz)	50Hz / 45Hz-55Hz					
Max. Output Current (A)	8.4A	9.5A	12.5A	14.2A	15A	16.5A
AC Connection (With PE)	Single Phase					
Current Distortion (THDi)	<1.5%	<1.5%	<1.5%	<1.5%	<1.5%	<1.5%
Power Factor	>0.99 (Adjustable From 0.8 Leading To 0.8 Lagging)					
Efficiency						
Maximum Conversion Efficiency	99.7%	99.3%	98.3%	98.4%	98.5%	98.8%
European Efficiency	98.3%	98%	98.1%	98.2%	98.2%	98.3%
MPPT Efficiency	98.7%	98.7%	98.7%	98.5%	99.8%	98.9%
Safety & Protection						
DC Reverse-Polarity Protection	YES					
Anti-Islanding / Overvoltage Protection	YES					
Shortcut Circuit Protection	YES					
Leakage Current Protection	YES					
Grid Monitoring / Ground Fault Monitoring	YES					
DC/AC Side SPD (Thermally Protected)	YES | TYPE I + II					
General Parameters						
Dimension (L/W/H) (mm)	154/287/285mm					
Weight (Kg)	5.5KG					
Embedded DC Switch	Optional					
Zero Export Function	Optional					
Night Power Consumption (W)	<0.2					
Isolation Type	Transformerless					
Technology	Ai Ready Sic + Heric					
Protection Degree	IP66 According To IEC60529					
Operation Temperature (°C)	-25 - +60					
Cooling Concept	PWM Technology, Auto RPM | Natural Convection + Fan Cooling (12000 RPM)					
Operating Altitude (M)	<2000m Without Power Derating					
Acoustic Noise Level (DB)	<35 DB					
Display	Graphic LCD					
Communication Interface	Standard WIFI; RS485 (Optional)					
Warranty	10 Years ; 25 Years For Optional					

SINGLE PHASE
SOLAR GTI

4.4kW | 4.8kW | 5kW | 5.3kW | 5.5kW | 6kW

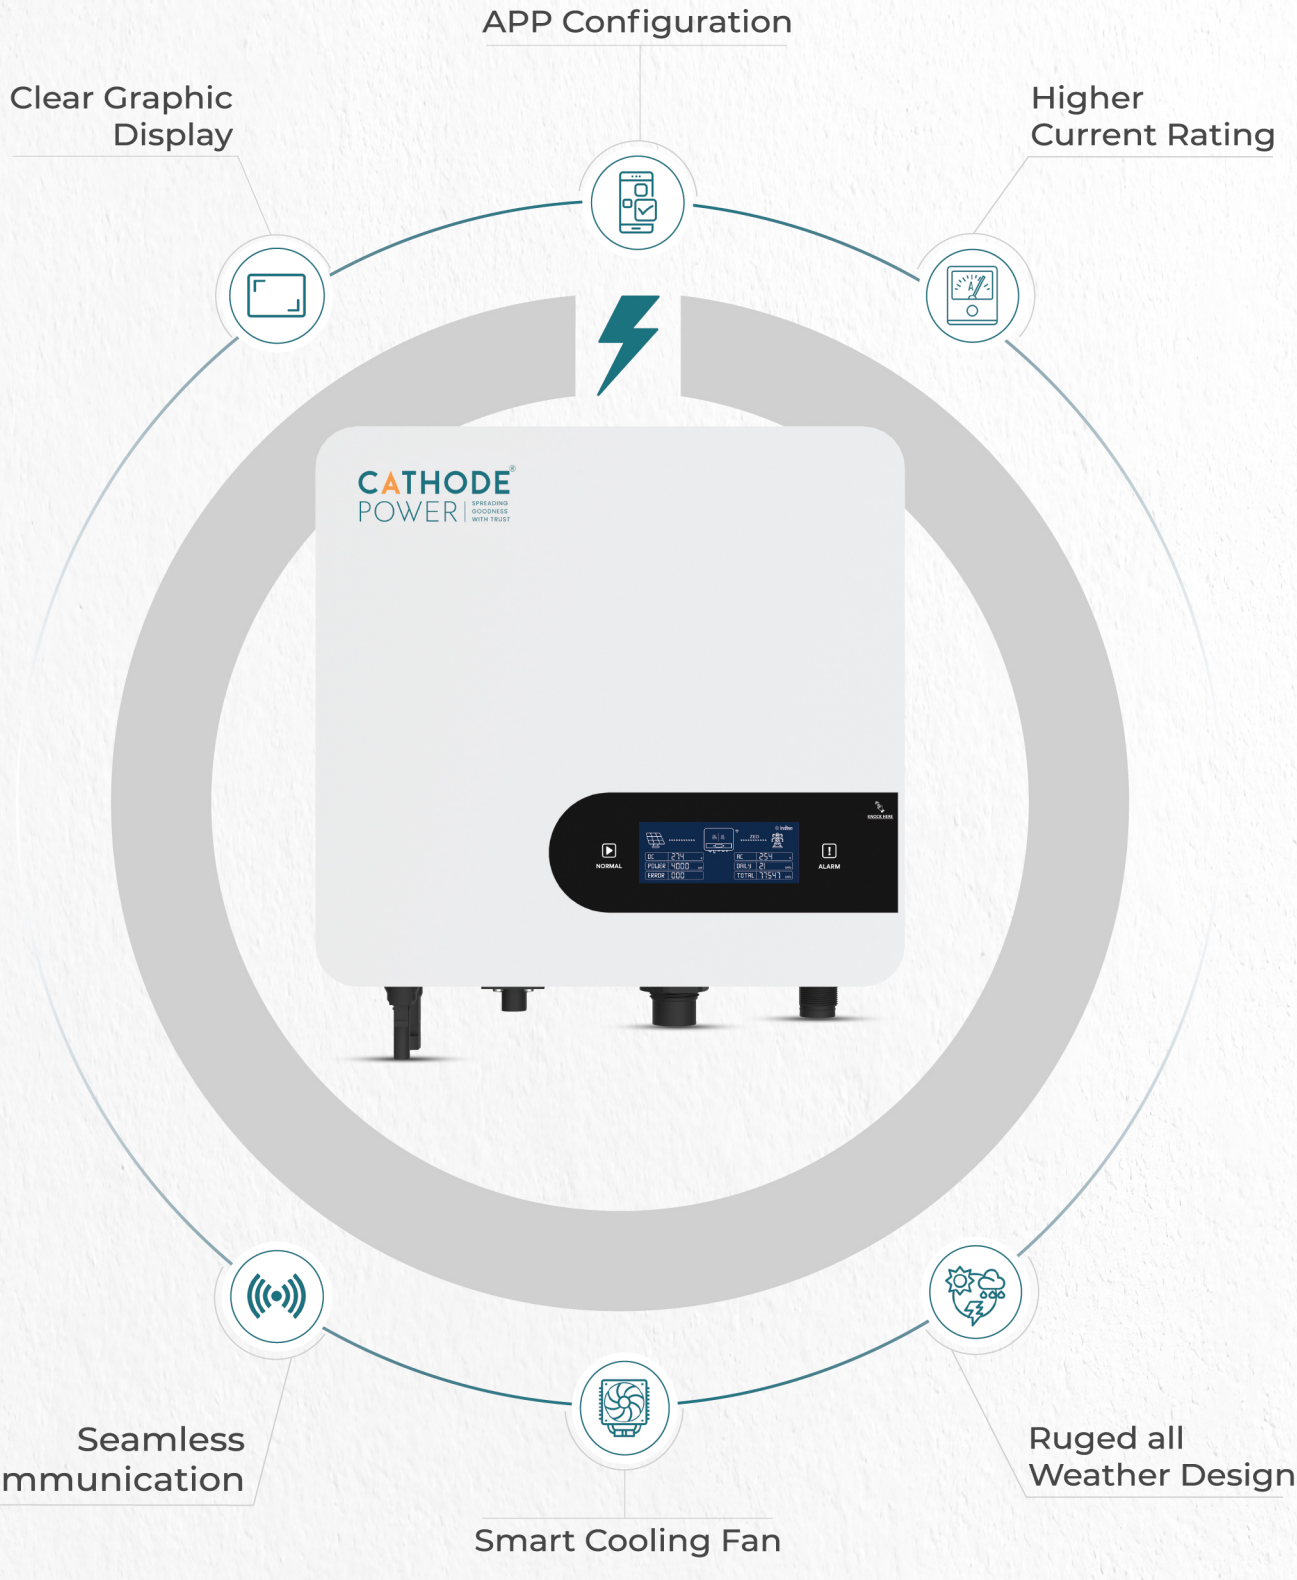

CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-4400L TO CP-6000L)

MODEL NO.	CP-4400L	CP-4600L	CP-4800L	CP-5000L	CP-5300L	CP-5500L	CP-6000L
DC Side | Input Parameters							
Max. Allowable DC Voltage (VDC) | Max. DC Voltage (VDC)	420/550V	420/550V	500/550V	550/550V	550/550V	550/550V	550/550V
Min. System Start | Shut Down Voltage (VDC)	45V	45V	45V	45V	45V	45V	45V
Max. Input Current (A)	22A	22A	22A	22A	22A	22A	22A
Max. Short Circuit I/p Current Per MPPT	30A	30A	30A	30A	30A	30A	30A
Number of MPP Tracker | Total Nos. Of String	1/1	1/1	1/1	1/1	1/1	1/1	1/1
Input Terminal Type	MC4						
AC Side | Output Parameters							
Rated Output Power (W)	4400W	4600W	4800W	5000W	5300W	5500W	6000W
Maximum Output Power (VA)	4400VA	4600VA	4800VA	5000VA	5300VA	5500VA	6000VA
Nominal Output Voltage/Range (V)	L/N/PE,240/140-310Vac						
AC Grid Frequency/Range (Hz)	50Hz / 45Hz-55Hz						
Max. Output Current (A)	18.3A	19.1A	20A	20.8A	22A	23A	28A
AC Connection (With PE)	Single Phase						
Current Distortion (THDi)	<1.5%	<1.5%	<1.5%	<1.5%	<1.5%	<1.5%	<1.5%
Power Factor	>0.99 (Adjustable From 0.8 Leading To 0.8 Lagging)						
Efficiency							
Maximum Conversion Efficiency	99.7%	99.3%	98.3%	98.4%	98.5%	98.8%	98.9%
European Efficiency	98.3%	98%	98.1%	98.2%	98.2%	98.3%	98.1%
MPPT Efficiency	98.7%	98.7%	98.7%	98.5%	99.8%	98.9%	98.6%
Safety & Protection							
DC Reverse-Polarity Protection	YES						
Anti-Islanding / Overvoltage Protection	YES						
Shortcut Circuit Protection	YES						
Leakage Current Protection	YES						
Grid Monitoring / Ground Fault Monitoring	YES						
DC/AC Side SPD (Thermally Protected)	YES | TYPE I + II						
General Parameters							
Dimension (L/W/H) (mm)	340/290/127mm						
Weight (Kg)	8KG						
Embedded DC Switch	Optional						
Zero Export Function	Optional						
Night Power Consumption (W)	<0.2						
Isolation Type	Transformerless						
Technology	Heric						
Protection Degree	IP65 According To IEC60529						
Operation Temperature (°C)	-25 - +60						
Cooling Concept	PWM Technology, Auto RPM | Natural Convection + Fan Cooling (12000 RPM)						
Operating Altitude (M)	<2000m Without Power Derating						
Acoustic Noise Level (DB)	<35 DB						
Display	Graphic LCD						
Communication Interface	Standard WIFI; RS485 (Optional)						
Warranty	10 Years ; 25 Years For Optional						

THREE PHASE
SOLAR GTI (DUAL MPPT)

4 kW | 5 kW | 6 kW | 8 kW | 10 kW | 12 kW | 15 kW

CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-04HL TO CP-15HL)

MODEL NO.	CP-04HL	CP-05HL	CP-06HL	CP-08HL	CP-10HL	CP-12HL	CP-15HL
DC Side | Input Parameters							
Max. Input Power	4.8kWp	6kWp	7.2kWp	9.6kWp	12kWp	14.4kWp	18kWp
Max. P.V. Power (Per MPPT)	3kWp	4kWp	5kWp	6kWp	7kWp	8kWp	10kWp
Max. DC Voltage	1000V						
Start-up Voltage	180V						
Nominal Voltage	600V						
MPPT Voltage Range	160V - 900V						
No. of MPP Trackers	2						
No. of PV Strings Per MPP Tracker	1/1					1/2	
Max. Input Current Per MPP Tracker	16A / 16A					16A / 32A	
Max. Input Short-Circuit Current Per MPPT	20A / 20A					20A / 40A	
AC Side | Output Parameters							
AC Nominal Output Power	4kW	5kW	6kW	8kW	10kW	12kW	15kW
Max. AC Apparent Power	4.4kVA	5.5kVA	6.6kVA	8.8kVA	11kVA	13.2kVA	16.5kVA
Nominal AC Voltage L-N / L-L (Range*)	230V / 400V (290V - 490V)						
AC Grid Frequency (Range*)	50Hz (45Hz - 55Hz)						
Max. Output Current (PF=0.9)	6.4A	8.0A	9.6A	12.8A	15.9A	19.1A	23.9A
Adjustable Power Factor	>0.99, 0.8 Leading To 0.8 Lagging						
THDi	<3%						
AC Grid Connection Type	3L/N/PE or 3L/PE						
Efficiency							
Maximum Conversion Efficiency	98.40%			98.50%		98.60%	
European Efficiency	97.50%			98.00%		98.10%	
MPPT Efficiency	99.90%			99.90%		99.90%	
Safety & Protection							
Anti Flow Protection	OPTIONAL						
DC Switch	YES						
DC Reserve Polarity Protection	YES						
AC/DC Surge Protection	TYPE I + II / TYPE II						
Insulation Resistance Monitoring	YES						
AC Short-Circuit Protection	YES						
Grid Monitoring	YES						
Anti-islanding Protection	YES						
Residual-Current Monitoring Unit (GFCI)	YES						
String Fault Monitoring	OPTIONAL						
AFCI Protection	OPTIONAL						
Anti PID Function	YES						
General Parameters							
Noise	<35dB						<50 dB
Dimension (L/W/H) (mm)	440x370x140mm			440x370x186mm		440x370x186mm	
Weight	13kg			16kg		17kg	
Operating Temperature Range	-25°C To 60°C (Greater Than 45°C Derating)						
Relative Humidity	0-100%						
Altitude	4000m (> 2000m Derating)						
Self-Consumption At Night	<1W						
Topology	Transformerless						
Cooling	Natural Convection						Smart Cooling Fan
Protection Degree	IP66						
DC Connection	H4/MC4 (Optional)						
AC Connection	Connector						
Warranty	10 Years						
Display	Led / Touch						
Communication	Host: RS 485 + USB Optional: 4G/WI-FI						

THREE PHASE
SOLAR GTI (SINGLE MPPT)

4 kW | 5 kW | 6 kW | 8 kW | 10 kW | 12 kW | 15 kW

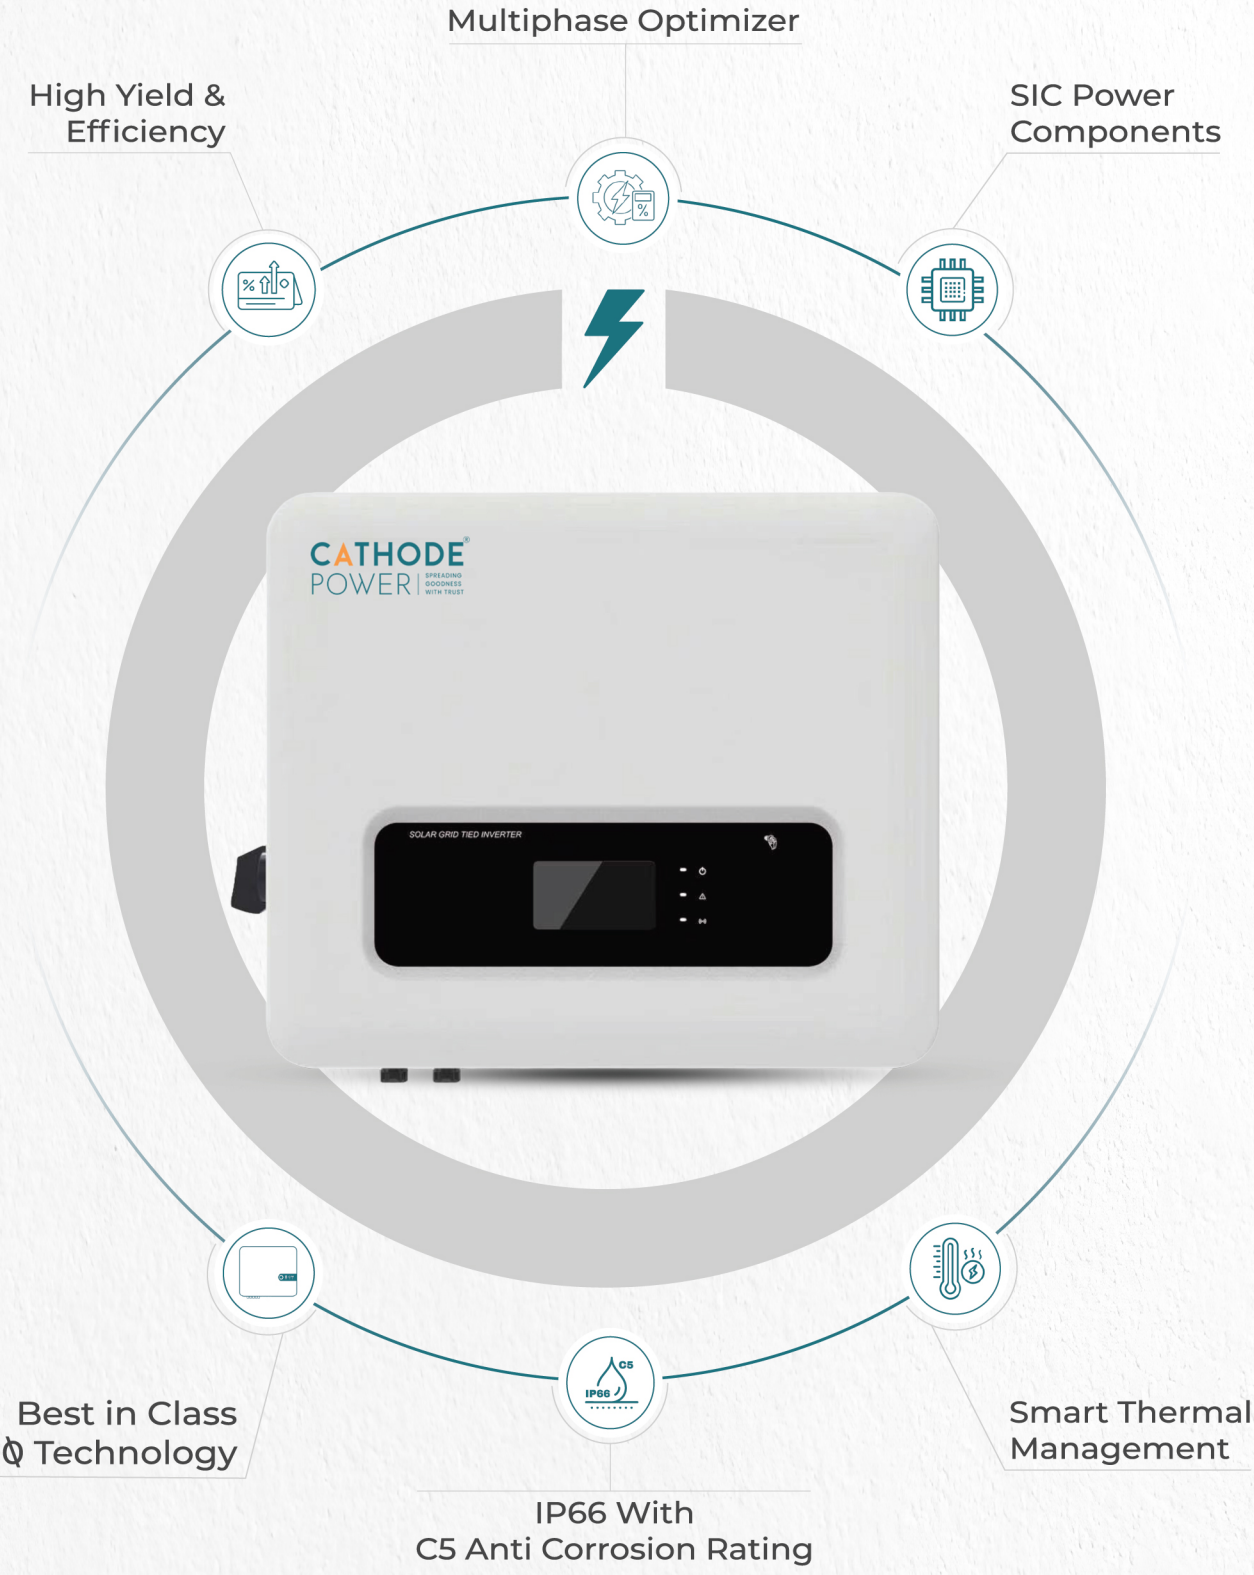

CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(6G-04HLS TO 6G-15HLS)

MODEL NO.	6G-04HLS	6G-05HLS	6G-06HLS	6G-08HLS	6G-10HLS	6G-12HLS	6G-15HLS
DC Side | Input Parameters							
Max. Input Power	4.8kWp	6kWp	7.2kWp	9.6kWp	12kWp	14.4kWp	18kWp
Max. P.V. Power (Per MPPT)	4.8kWp	6kWp	7.2kWp	9.6kWp	12kWp	14.4kWp	18kWp
Max. DC Voltage	1000V						
Start-up Voltage	160V						
Nominal Voltage	600V						
MPPT Voltage Range	160V - 850V						
No. of MPP Trackers	1						
No. of PV Strings Per MPP Tracker	1						
Max. Input Current Per MPP Tracker	22A	22A	22A	22A	30A	30A	36A
Max. Input Short-Circuit Current Per MPPT	30A	30A	30A	30A	40A	40A	48A
AC Side | Output Parameters							
AC Nominal Output Power	4kW	5kW	6kW	8kW	10kW	12kW	15kW
Max. AC Apparent Power	4.8kVA	6kVA	7kVA	8.8kVA	11kVA	13.2kVA	16.5kVA
Nominal AC Voltage L-N / L-L (Range*)	230V/400V (290V - 490V)						
AC Grid Frequency (Range*)	50Hz; 400Vac						
Max. Output Current	8A	10A	12A	15A	17A	20A	25A
Adjustable Power Factor	>0.99, 0.8 Leading To 0.8 Lagging						
THDi	<5%						
AC Grid Connection Type	3 W/N/PE						
Efficiency							
Maximum Conversion Efficiency	98.2%			98.3%	98.4%	98.4%	
European Efficiency	97.7%			97.8%	97.9%	98.0%	
MPPT Efficiency	99.9%			99.9%	99.9%	99.9%	
Safety & Protection							
Anti Flow Protection	OPTIONAL						
DC Switch	OPTIONAL						
DC Reserve Polarity Protection	YES						
AC/DC Surge Protection	TYPE I + II / TYPE II						
Insulation Resistance Monitoring	YES						
AC Short-Circuit Protection	YES						
Grid Monitoring	YES						
Anti-islanding Protection	YES						
Residual-Current Monitoring Unit (GFCI)	YES						
String Fault Monitoring	OPTIONAL						
AFCI Protection	OPTIONAL						
Anti PID Function	YES						
General Parameters							
Noise	<35dB						<50 dB
Dimension (LxWxH) (mm)	420/370/130mm						
Weight	16kg						
Operating Temperature Range	-25°C To 60°C (Greater Than 45°C Derating)						
Relative Humidity	0-95%, No Condensation						
Altitude	4000m (> 2000m Derating)						
Self-Consumption At Night	<1W						
Topology	Non-isolated/Transformerless						
Cooling	Smart Cooling Fan						
Protection Degree	IP65						
DC Connection	H4/MC4 (Optional)						
AC Connection	Connector						
Warranty	10 Years						
Display	LCD						
Communication	Host: RS 485 + USB Optional: 4G/WI-FI						

THREE PHASE
SOLAR GTI (DUAL MPPT)

18 kW | 20 kW | 25 kW

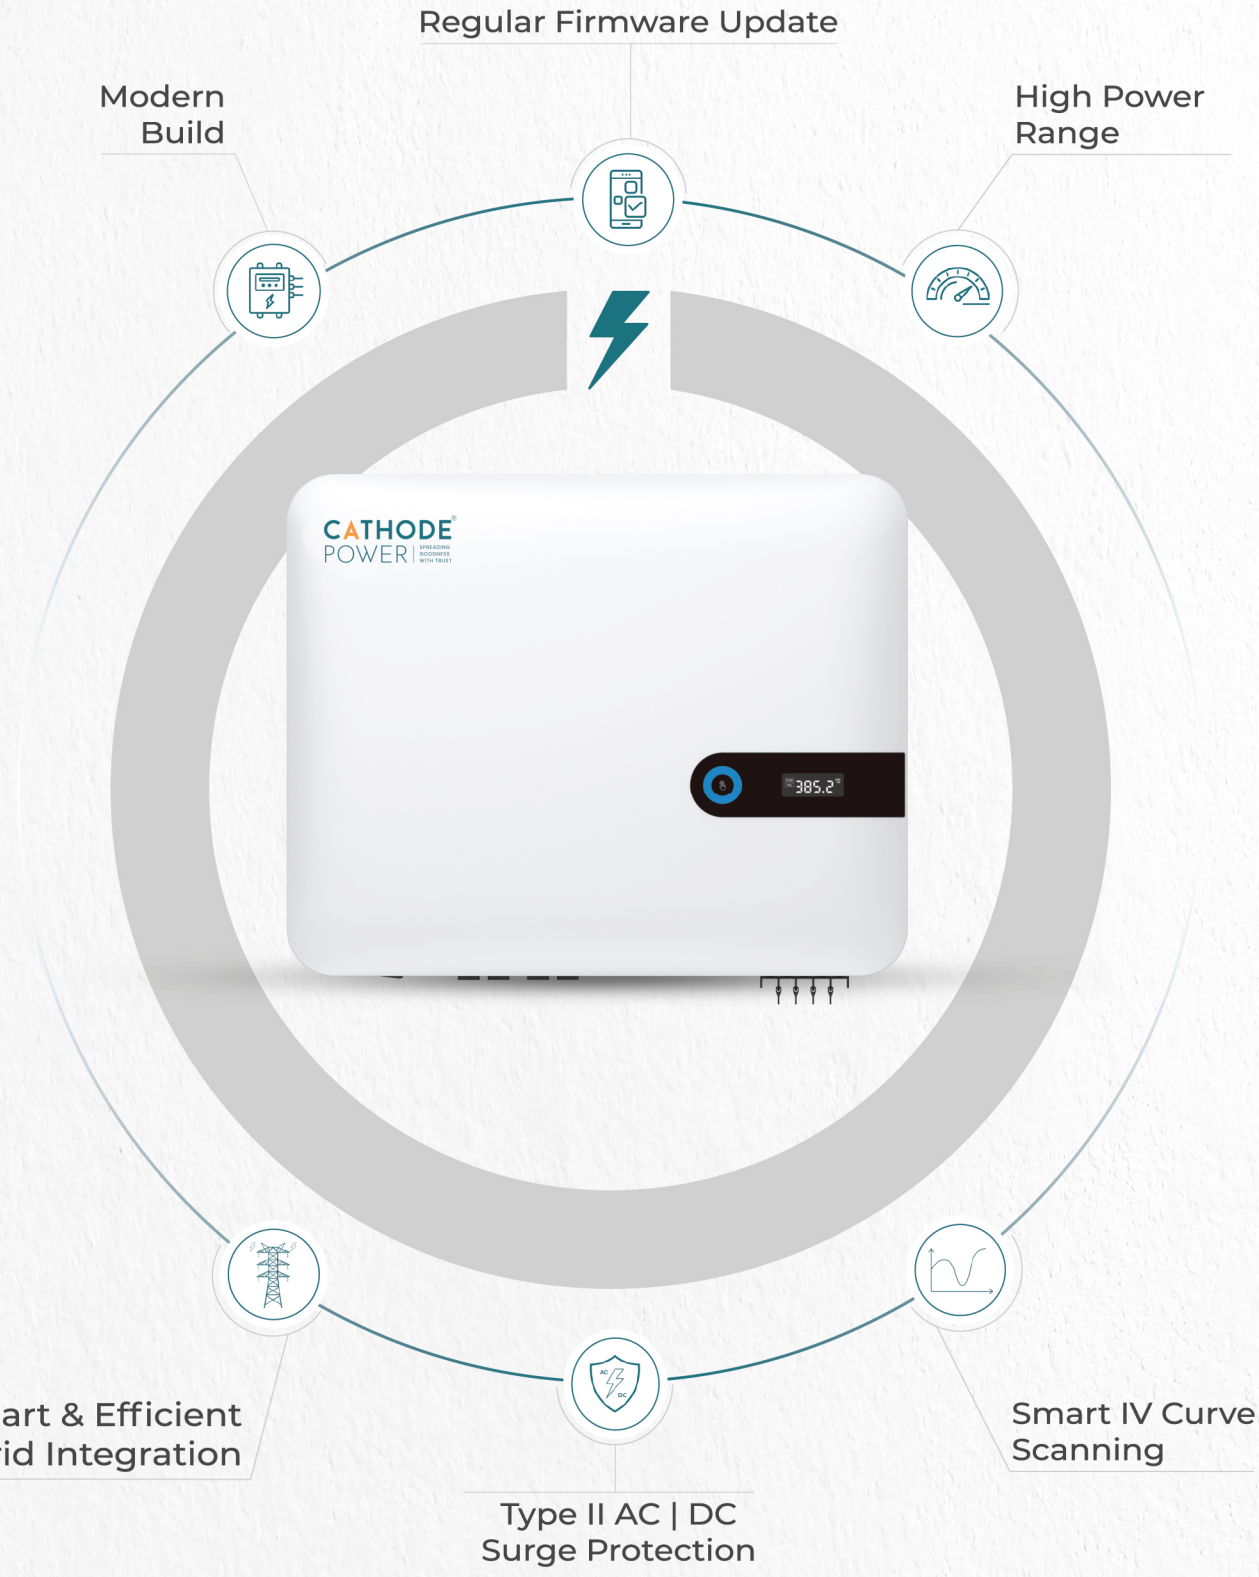

CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-18HL TO CP-25HL)

MODEL NO.	CP-18HL	CP-20HL	CP-25HL
DC Side | Input Parameters			
Max. Input Power	21.6kWp	24kWp	30kWp
Max. P.V. Power (Per MPPT)	11kWp	12kWp	15kWp
Max. DC Voltage		1000V	
Start-up Voltage		180V	
Nominal Voltage		600V	
MPPT Voltage Range		160V - 900V	
No. of MPP Trackers		2	
No. of PV Strings Per MPP Tracker		2	
Max. Input Current Per MPP Tracker		32A	
Max. Input Short-Circuit Current Per MPPT		40A	
AC Side | Output Parameters			
AC Nominal Output Power	18kW	20kW	25kW
Max. AC Apparent Power	19.8kVA	22kVA	27.5kVA
Nominal AC Voltage L-N / L-L (Range*)		230V / 400V (290V - 490V)	
AC Grid Frequency (Range*)		50Hz (45Hz - 55Hz)	
Max. Output Current (PF=0.9)	29A	33.4A	39.9A
Adjustable Power Factor		>0.99 , 0.8 Leading To 0.8 Lagging	
THDi		<3%	
AC Grid Connection Type		3L/N/PE or 3L/PE	
Efficiency			
Maximum Efficiency		98.5%	
European Efficiency		98.1%	
MPPT Efficiency		99.9%	
Safety & Protection			
Anti-Flow Protection		YES	
DC Switch		YES	
DC Reserve Polarity Protection		YES	
AC/DC Surge Protection		TYPE I + II / TYPE II	
Insulation Resistance Monitoring		YES	
AC Short - Circuit Protection		YES	
Grid Monitoring		YES	
Anti - islanding Protection		YES	
Residual - Current Monitoring Unit (GFCI)		YES	
String Fault Monitoring		YES	
AFCI Protection		OPTIONAL	
Anti PID Function		YES	
General Parameters			
Noise		<50 dB	
Dimension (LxWxH) (mm)		520/420/242mm	
Weight		27kg	
Operating Temperature Range		-25°C To 60°C (>45°C Derating)	
Relative Humidity		0-100%	
Altitude		4000m (> 3000m Derating)	
Self-Consumption At Night		<4W	
Topology		Non-Isolated/Transformerless	
Cooling		Intelligent Air Cooling	
Protection Degree		IP65	
DC Connection		H4/MC4 (Optional)	
AC Connection		Lug Connector	
Warranty		10 Years	
Display		Led / Touch	
Communication		Host: RS 485 + USB Optional: 4G/WI-FI	

THREE PHASE
SOLAR GTI

30 kW | 33 kW | 36 kW | 40 kW | 45 kW | 50 kW

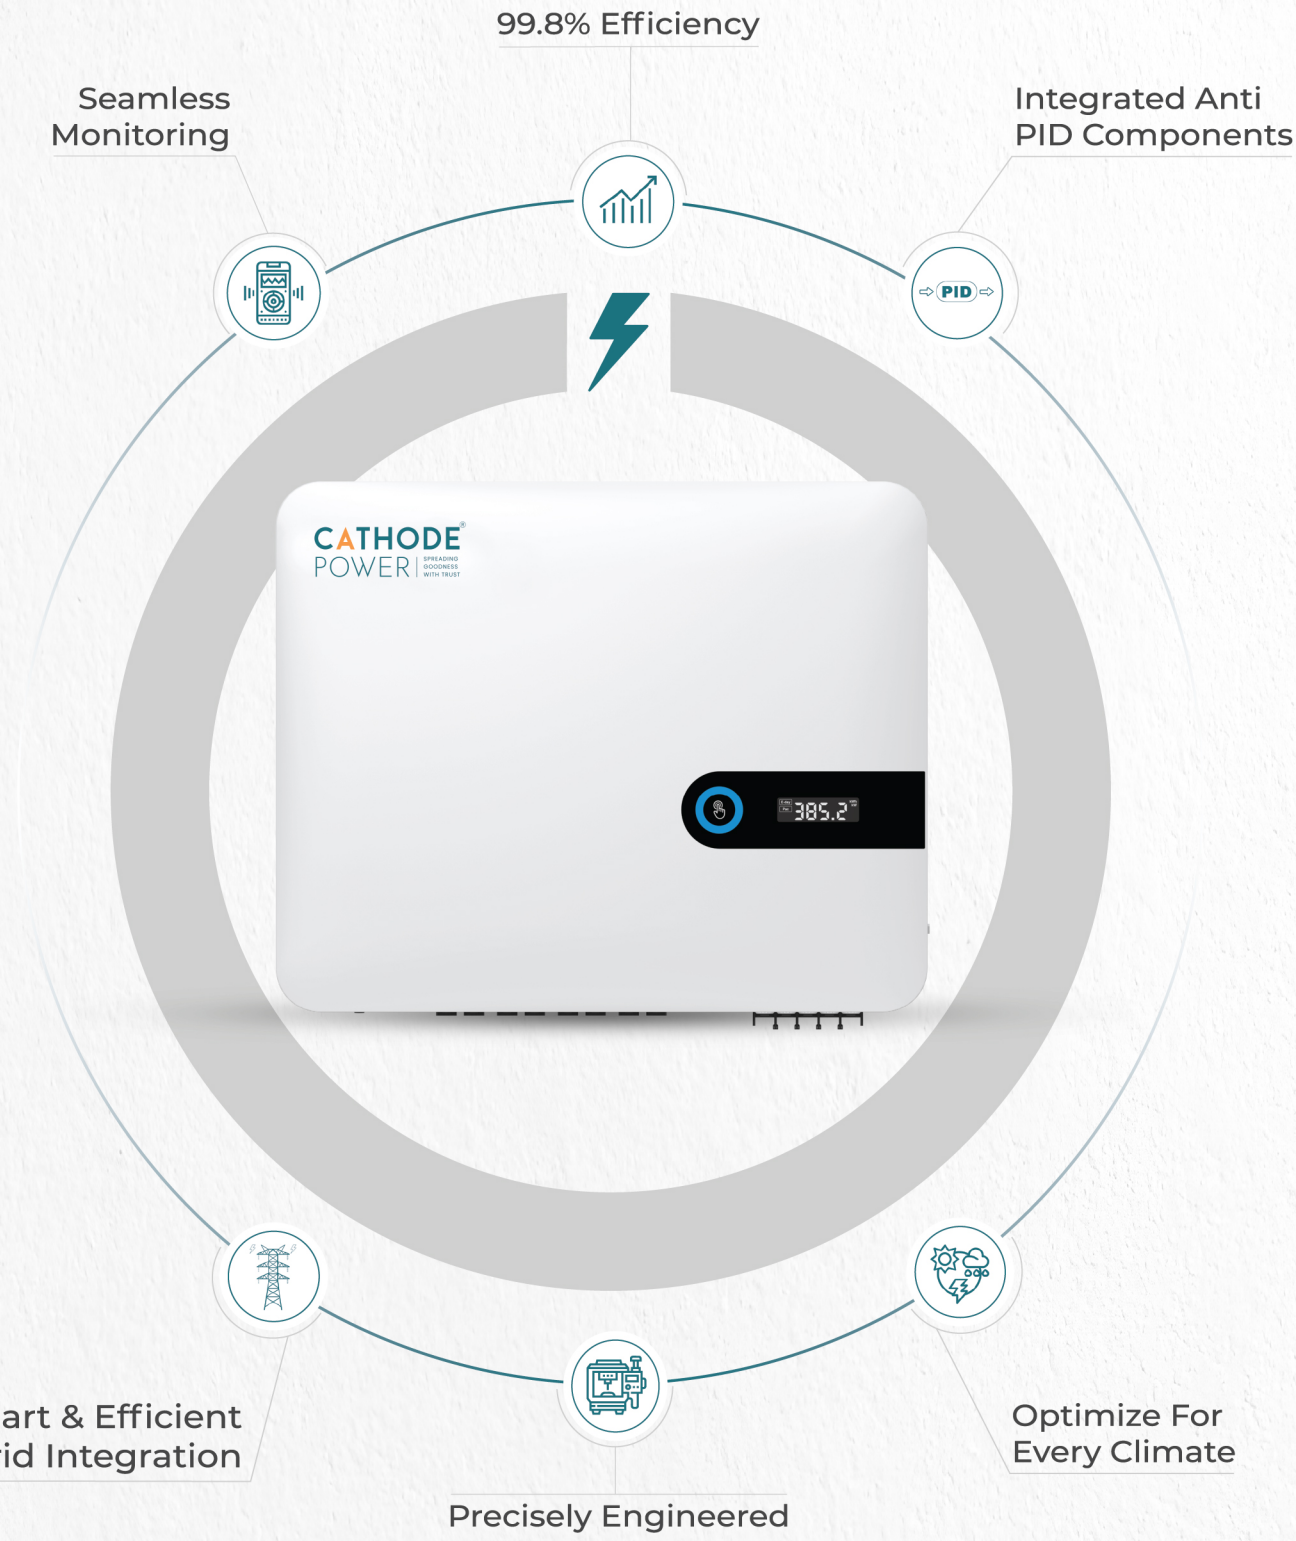

CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP30HL TO CP50HL)

MODEL NO.	CP30HL	CP33HL	CP36HL	CP40HL	CP45HL	CP50HL
DC Side | Input Parameters						
Max. Input Power	36kWp	40kWp	43.2kWp	48kWp	54kWp	60kWp
Max. P.V. Power (Per MPPT)	12kWp	13.5kWp	15kWp	16kWp	14kWp	15kWp
Max. DC Voltage	1100V					
Start-up Voltage	180V					
Nominal Voltage	600V					
MPPT Voltage Range	200V - 900V					
No. of MPP Trackers	3	3	3	3	4	4
No. of PV Strings Per MPP Tracker	2					
Max. Input Current Per MPP Tracker	32A					
Max. Input Short-Circuit Current Per MPPT	40A					
AC Side | Output Parameters						
AC Nominal Output Power	30kW	33kW	36kW	40kW	45kW	50kW
Max. AC Apparent Power	33kVA	36kVA	39.6kVA	44kVA	49.5kVA	55kVA
Nominal AC Voltage L-N / L-L (Range*)	230V / 400V (290V - 490V)					
AC Grid Frequency (Range*)	50Hz (45Hz - 55Hz)					
Max. Output Current (PF=0.9)	48.3A	54.5A	60A	66.7A	75.04A	84.1A
Adjustable Power Factor	>0.99, 0.8 Leading To 0.8 Lagging					
TDHi	<3%					
AC Grid Connection Type	3L/N/PE or 3L/PE					
Efficiency						
Maximum Efficiency	98.5%					
European Efficiency	98.2%					
MPPT Efficiency	99.9%					
Safety & Protection						
Anti-Flow Protection	OPTIONAL					
DC Switch	YES					
DC Reserve Polarity Protection	YES					
AC / DC Surge Protection	TYPE I + II / TYPE II					
Insulation Resistance Monitoring	YES					
AC Short - Circuit Protection	YES					
Grid Monitoring	YES					
Anti-islanding Protection	YES					
Residual-Current Monitoring Unit (GFCI)	YES					
String Fault Monitoring	YES					
AFCI Protection	OPTIONAL					
Anti PID Function	YES					
General Parameters						
Noise	<50dB					
Dimension (LxWxH) (mm)	590/480/237mm					
Weight (Kg)	32 kg			34 kg		35 kg
Operating Temperature Range	-25°C To +60°C (>45°C Derating)					
Relative Humidity	0-100%					
Altitude	4000m (>3000m Derating)					
Self-Consumption At Night	<4w					
Topology	Non-Isolated/Transformerless					
Cooling	Intelligent Air Cooling					
Protection Degree	IP66					
DC Connection	H4 / MC4 (Optional)					
AC Connection	Lug Connector					
Warranty	10 Years					
Display	LED					
Communication Interface	Yes: RS 485/USB/Bluetooth, Optional: 4G/WI-FI					

THREE PHASE
SOLAR GTI

80 kW | 100 kW | 110 kW

CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP80HL TO CP110HL)

MODEL NO.	CP80HL	CP100HL	CP110HL
DC Side | Input Parameters			
Max. Input Power	120kWp	150kWp	165kWp
Max. P.V. Power (Per MPPT)	13kWp	17kWp	18kWp
Max. DC Voltage		1100V	
Start-up Voltage		180V	
Nominal Voltage		600V	
MPPT Voltage Range		200V - 1000V	
No. of MPP Trackers		9	
No. of PV Strings Per MPP Tracker		2	
Max. Input Current Per MPP Tracker		32A	
Max. Input Short-Circuit Current Per MPPT		40A	
AC Side | Output Parameters			
AC Nominal Output Power	80kW	100kW	110kW
Max. AC Apparent Power	88kVA	110kVA	121kVA
Nominal AC Voltage L-N / L-L (Range*)		230V - 400V (290V - 490V)	
AC Grid Frequency (Range*)		50Hz (45Hz - 55Hz)	
Max. Output Current (PF=0.9)	128A	159.4A	175A
Adjustable Power Factor		>0.99, 0.8 Leading To 0.8 Lagging	
THDi		<3%	
AC Grid Connection Type		3L/N/PE or 3L/PE	
Efficiency			
Maximum Efficiency		98.5%	
European Efficiency		98.1%	
MPPT Efficiency		99.9%	
Safety & Protection			
Anti-Flow Protection		OPTIONAL	
DC Switch		YES	
DC Reserve Polarity Protection		YES	
AC/DC Surge Protection		TYPE I + II / TYPE II	
Insulation Resistance Monitoring		YES	
AC Short-Circuit Protection		YES	
Grid Monitoring		YES	
Anti-islanding Protection		YES	
Residual-Current Monitoring Unit (GFCI)		YES	
String Fault Monitoring		YES	
AFCI Protection		OPTIONAL	
Anti PID Function		YES	
General Parameters			
Noise		<50dB	
Dimension (LxWxH) (mm)		1040/700/350mm	
Weight (Kg)		88kg	
Operating Temperature Range		-25°C To +60°C (>45°C Derating)	
Relative Humidity		0-100%	
Altitude		4000m (>3000m Derating)	
Self-Consumption At Night		<4w	
Topology		Non-Isolated/Transformerless	
Cooling		Intelligent Air Cooling	
Protection Degree		IP66	
DC Connection		H4 / MC4 (Optional)	
AC Connection		Lug Connector	
Warranty		10 Years	
Display		LED	
Communication Interface		Yes: RS 485/USB/Bluetooth, Optional: 4G/WI-FI	

SINGLE PHASE
HYBRID INVERTERS

3 kW | 3.6 kW | 4 kW | 4.4 kW | 5 kW | 6 kW

Compact & Modern Design

Direct Mode Operation

Smart Protection System

Smart Energy Management

Low Maintenance

IP65 Water & Dust Resistance

CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(6G-3.0-HYBDS TO 6G-6.0-HYBDS)

MODEL NO.	6G-3.0-HYBDS	6G-3.6-HYBDS	6G-4.0-HYBDS	6G-4.4-HYBDS	6G-5.0-HYBDS	6G-6.0-HYBDS
PV (DC)						
Max. PV Input Power (Per MPPT)	2.5kWp + 2.5kWp	3kWp + 3kWp	4kWp + 4kWp	4kWp + 4kWp	5kWp + 5kWp	6kWp + 6kWp
Max. Input Voltage	500V					
Start-up Voltage	90V					
MPPT Full Load Voltage Range	235V - 425V	235V - 425V	235V - 425V	235V - 425V	295V - 425V	350V - 425V
MPPT Input Voltage Range	120V - 425V					
MPPT Max. Input Current	18A / 18A					
MPPT Short-Circuit Current	26A					
No. of MPPT	2					
No. of Strings Per MPPT	1					
Battery (DC)						
Max. Charge / Discharge Power	3000W	3600W	4000W	4400W	5000W	6000W
Rated Voltage	24V/48V				48V	
Battery Voltage Range	22V - 60V				40V - 60V	
Max. Charge / Discharge Current	90A	90A	100A	100A	110A	120A
Communication Port	CAN / RS485					
Battery Type	Lead acid/Lithium Batteries/Gel Batteries					
Grid (AC)						
Max. Input Apparent Power**	4000VA	4800VA	5400VA	6000VA	6700VA	8100VA
Rated Output Power (ON Grid)	3000W	3600W	4000W	4400W	5000W	6000W
Max. Output Apparrent Power	3000VA	3600VA	4000VA	4400VA	5000VA	6000VA
Rated AC Voltage	L/N/PE, 230V					
Input/Output Voltage Range	150V - 290V (140V - 310V Optional)					
Rated Output Volatge Frequency	50Hz, Intelligent Adaptive/Settable					
Input/Output Voltage Frequency Range	45Hz - 55Hz					
Max. Input/Output Current	13.05A	15.66A	17.4A	19.14A	21.8A	26.1A
Max. Grid Pass Through Current	30A			40A		
Power Factor (Rated)	>0.99					
Adjustable Power Factor Range	0.8 Leading To 0.8 Lagging					
Total Harmonic Distortion	<3% (Rated Power)					
Grid Type	Single Phase, L+N+PE					
AC Load Output (Off-Grid)						
Rated Output Power	3000W	3600W	4000W	4400W	5000W	6000 W
Rated Output Voltage (L/N/PE)	220V/230V					
Output Voltage Range	200V - 240V					
Rated Output Frequency	50Hz, Intelligent Adaptive/Settable					
Off Grid Overload Capability	101%-110% 30s, >110% 10s					
Total Harmonic Distortion	<3% (R Load)					
On-Grid / Off-Grid Switching Time	<10ms					
Efficiency						
Max. Efficiency	97.6%					
Max. European Efficiency	96.5%					
Max. MPPT Efficiency	99.9%					
Protection						
Integrated Protection	Grid/Battery over & under voltage protection, Grid over & under frequency protection, Output short circuit/ overload protection, PV everse connection alarm, Battery charge & discharge overcurrent protection, Insulation impedance protection, Ground fault protection					
Surge Protection	DC Type II, AC Type I+II					
Display & Communication						
Display	Touchscreen LED + APP					
Communication	RS485, 4G (Optional), WiFi (Optional)					
General Data						
Noise	<55dB					
Dimension (LxWxH) (mm)	320x170x440mm					
Weight		14kg	14.5kg		15kg	
Operating Temperature Range	-25° - 60°C (Greater than 45°C Derating)					
Humidity	0-100%					
Altitude	3000m (>2000m derating)					
Cooling	Intelligent Air Cooling (IP68)					
Installation Style	Wall Mounted					
Protection Rating	IP65					
Warranty	5 Years Warranty					

THREE PHASE
HYBRID INVERTERS

8kW | 10kW | 12kW | 15kW

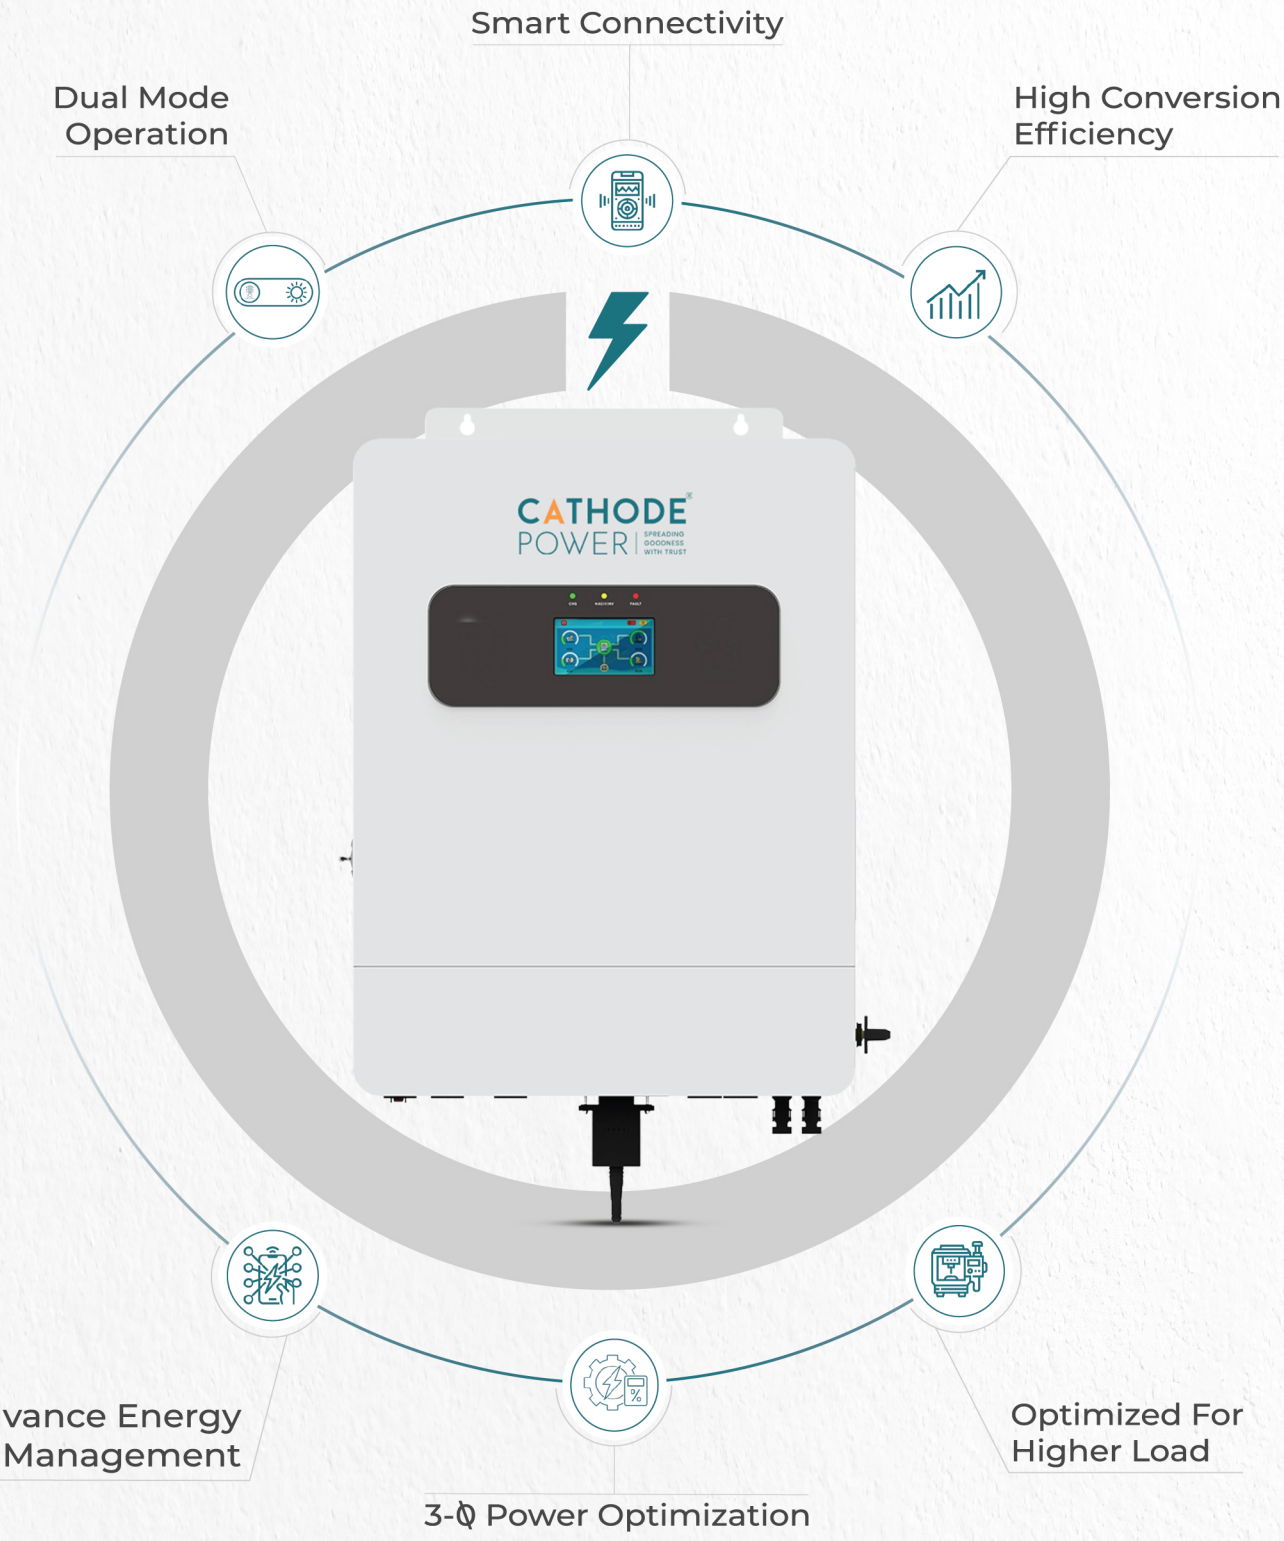

CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-8.0-HYBD TO CP-15-HYBD)

MODEL NO.	CP-8.0-HYBD	CP-10-HYBD	CP-12-HYBD	CP-15-HYBD
PV (DC)				
Max. PV Input Power (Per MPPT)	17000W	21000W	18000W	31000W
Max. PV Input Voltage	1000V			
PV Input Starting Voltage	120V			
MPPT Full Load Voltage Range	300V ~ 850V	245V ~ 850V	295V ~ 850V	272V ~ 850V
MPPT Input Voltage Range	120V ~ 850V			
PV Max. Input Current	15A+15A	30A+15A		30A+30A
MPPT Short-Circuit Current	17A/17A	34A/17A		34A/34A
No. of MPPT	2			
No. of Strings Per MPPT	1+1	2+1		2+2
Battery (DC)				
Max. Charge / Discharge Power	8500W	10500W	12500W	15500W
Battery Voltage Range	40V ~ 60V			
Max. Charge / Discharge Current	180A	220A	250A	280A
Charging Mode	3-Section Type/Equilibrium/Self-adaption BMS			
Battery Type	Lead acid/Lithium Batteries/Gel Batteries			
AC Output				
Rated Output Voltage	220/380V, 230/400V			
Grid Voltage Range	Local Grid Standard Mode/Custom Mode: 220-400V (Configurable)			
Output Frequency Range	50Hz, Intelligent Adaptive/Settable			
Max. Output Current	13.5A	16.7A	19.9A	24.7A
Rated Grid-Connected Current	12.9A/12.3A	15.9A/15.2A	18.9A/18.1A	23.5A/22.5A
Rated Grid-Connected Power	8500W	10500W	12500W	15500W
Max. Grid-Connected Viewing Power	8925W	11025W	13125W	16275W
Max. Grid-Connected Active Power	8925W	11025W	13125W	16275W
DC Component	<0.5% In (Rated Current)			
Grid Type	Three Phase, 3L+N+PE / 3L+PE (Adjustable)			
Output Power Factor	>.99@Rated Power (Adjustable 0.8 Leading~0.8Lagging)			
THDi	<3%			
THDu	<2% (Linear Load)			
Transfer Time	10ms (Typical Value)			
Off-Grid Overload Capability	100%-110% 3min, 110%-125% 1min, >125% 10s			
Efficiency				
Max. Efficiency	97.6%			
Max. European Efficiency	96.5%			
Max. MPPT Efficiency	99.9%			
Protection				
Integrated Protection	Over/Under Volt, Over/Under Freq Prot, AC Out SC/OL Prot, Anti-Island Prot, Batt Chg/Dchg OC Prot, Leakage Curr Prot, Insul Imped Prot, Grd Fault Prot, PV Rev Conn Alarm			
Surge Protection	DC Type II, AC Type I+II			
Display & Communication				
Display	Touchscreen + LED			
Communication	Standard: RS485/CAN/DRM | Optional: 4G/WIFI/GPRS			
General Data				
Noise	<55dB			
Dimension (LxWxH) (mm)	474/246/835mm			
Weight	38kg	40kg		47kg
Operating Temperature Range	-25° - 60°C (Greater than 45°C Derating)			
Humidity	0-100%			
Altitude	4000m (>2000m derating)			
Cooling	Intelligent Forced Air Cooling			
Installation Style	Wall Mounted			
Protection Rating	IP66			
Warranty	5 Years Warranty			

SINGLE PHASE HYBRID INVERTER

3.6kW | 6.2kW

APP Configuration

Higher Efficiency

Power Export Limit

Compact & Easy to Install

Smart Cooling Fan

IP65 Water & Dust Resistance

CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-3.6kW & CP-6.2KW)

MODEL NO.	3.6KW/24V*	6.2KW/48V*
DC Side | Input Parameters		
Input Sources	L+N+PE	
Rated Input Voltage	220/230/240V	
Voltage Range	90-280VAC±3V(APL Mode)170-280VAC±3V(UPS Mode)	
Frequency	50Hz (Auto Adaptive)	
AC Side | Output Parameters		
The Battery Inverts (Rated Power)	3600W	6200W
Photovoltaic Inverter (Rated Power)	4500W	6500W
Waveform	Pure Sine Wave	
Transfer Time (Adjustable)	Computer (UPS Mode)10ms, Appliance(APL Mode)20ms	
Peak Power	7200VA	12400VA
Overload Capacity	Battery Mode11s@105%~150% Load;2s@150%~200% Load;400ms@>200% Load	
Grid - Connected Operation		
Output Voltage	220/230/240VAC±5%	
Feed into the Grid Voltage Range	195-253VA	
Feed into the Grid Frequency Range	49-51±1Hz/59-61±1Hz	
Nominal Output Current	15.7A	26.9A
Power Factor Range	>0.99	
Maximum Conversion Efficiency (DC/AC)	98%	
Battery		
Battery Voltage	24Vdc	48Vdc
Constant Charging Voltage (Adjustable)	28.2Vdc	56.4Vdc
Floate Charging Voltage (Adjustable)	27Vdc	54Vdc
Battery	Li-ion**, Tubular, Flat Plate, SMF/VRLA or Any Local Battery Compatible	
Chargers		
PV Charging Mode	MPPT	MPPT
Max. PV Input Power	5000W	7500W
MPPT Tracking Range	60-500Vdc	90-500Vdc
Best Voltage	300~400V	300~400V
Max. PV Input Voltage	500Vdc	500Vdc
PV Max Input Current	18A	27A
Max. PV Charging Current	120A	120A
Max. AC Charging Current	100A	100A
Max. Charging Current	120A	120A
Display		
LCD Interface	CAN Display Running mode/Load/Input/Output	
Interface		
RS232	Baud Rate2400	
Extend the Socket Communication Interface	Lithium Battery BMS Communication Card WifiCard, Dry Contact	
Parallel Machine Interface	No Parallel Function	Parallel Machine (Network) Function
Environments		
Operating Temperature Range	-10 To 50°C	
Humidity	20%~95% (Non-Condensing)	
Storage Temperature	-15 To 60°C	
Altitude	-25°C To 60°C (>45°C Derating)	
Relative Humidity	0-100%	
Altitude	Altitude Not over 1000m, Derating over 1000m, Max 4000m, Refer to IEC62040	
Noise	<50db	

MICRO INVERTERS

0.6kW | 0.8kW | 1.0kW | 1.2kW

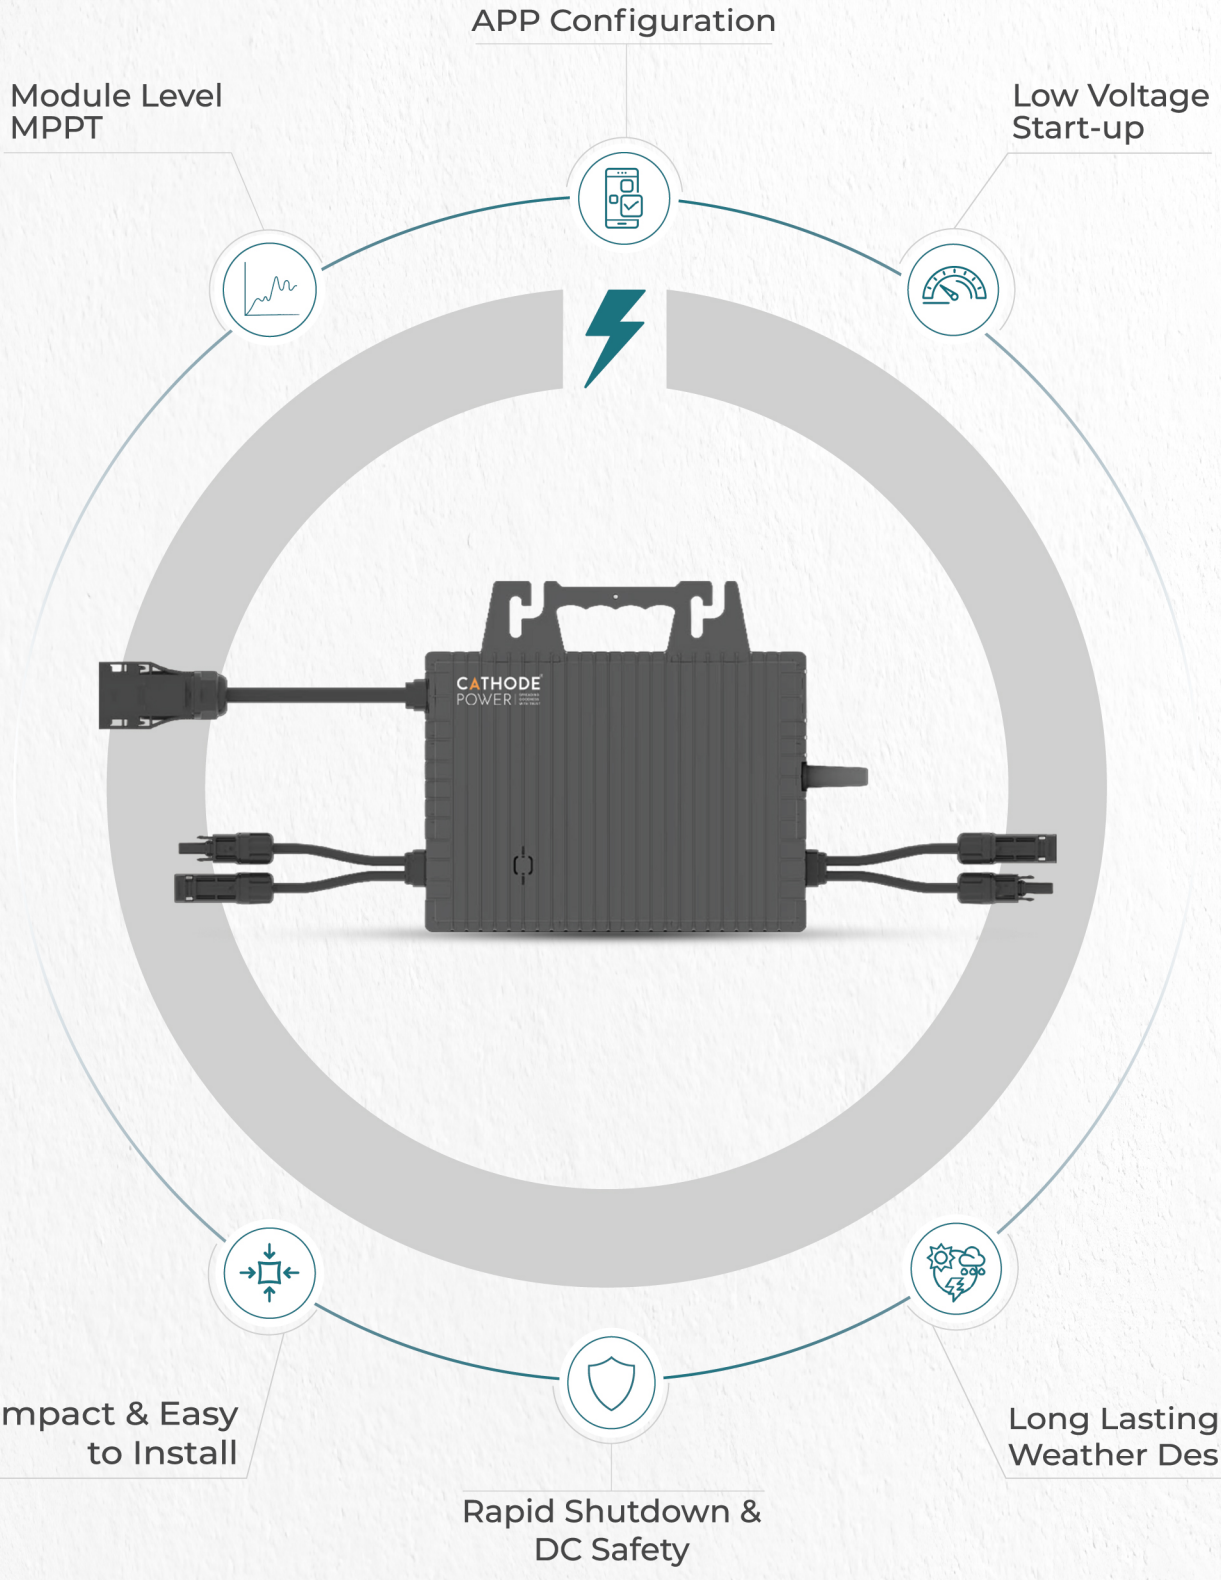

CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-0.6-MIC TO CP-1.2-MIC)

MODEL NO.	CP-0.6-MIC	CP-0.8-MIC	CP-1.0-MIC	CP-1.2-MIC
Input (DC)				
Max. DC Input Power	660kWp	880kWp	1100kWp	1320kWp
Max. DC Input Voltage (Per MPPT)	60V			
MPPT Voltage Range	16V - 60V			
Max. MPPT Current	20A			
Max. Short-Circuit Current	25A			
Quantity of MPPT	2			
Output (AC)				
Rated Voltage	230V			
Max. Current	2.61A	3.48A	4.35A	5.22A
Rated Frequency	50Hz			
Rated Power	600W	800W	1000W	1200W
Max. Apparent Power	600VA	800VA	1000VA	1200VA
Power Factor Range	0.8 Leading To 0.8 Lagging			
Efficiency				
Peak Inverter Efficiency	97.6%			
Nominal MPPT Efficiency	99.9%			
EU Efficiency	96.3%			
Night Time Power Consumption	<50			
General Data				
Dimensions (L/W/H) (mm)	331/218/40mm			
Weight	5.5kg			
Operating Temperature Range	-40°C - 60°C			
Protection Rating	IP67			
Cooling	Natural Convection			
Relative Humidity	0-100%			
Monitoring	WIFI			
Communication	RS485			
Type Of Isolation	Isolated HF Transformer			
Max. Operating Altitude Without Derating	2000m			
Overvoltage Category	DC II : AC III			
Warranty	10 Years			

MICRO INVERTERS

1.6kW | 1.8kW | 2.0kW | 2.2kW | 2.4kW

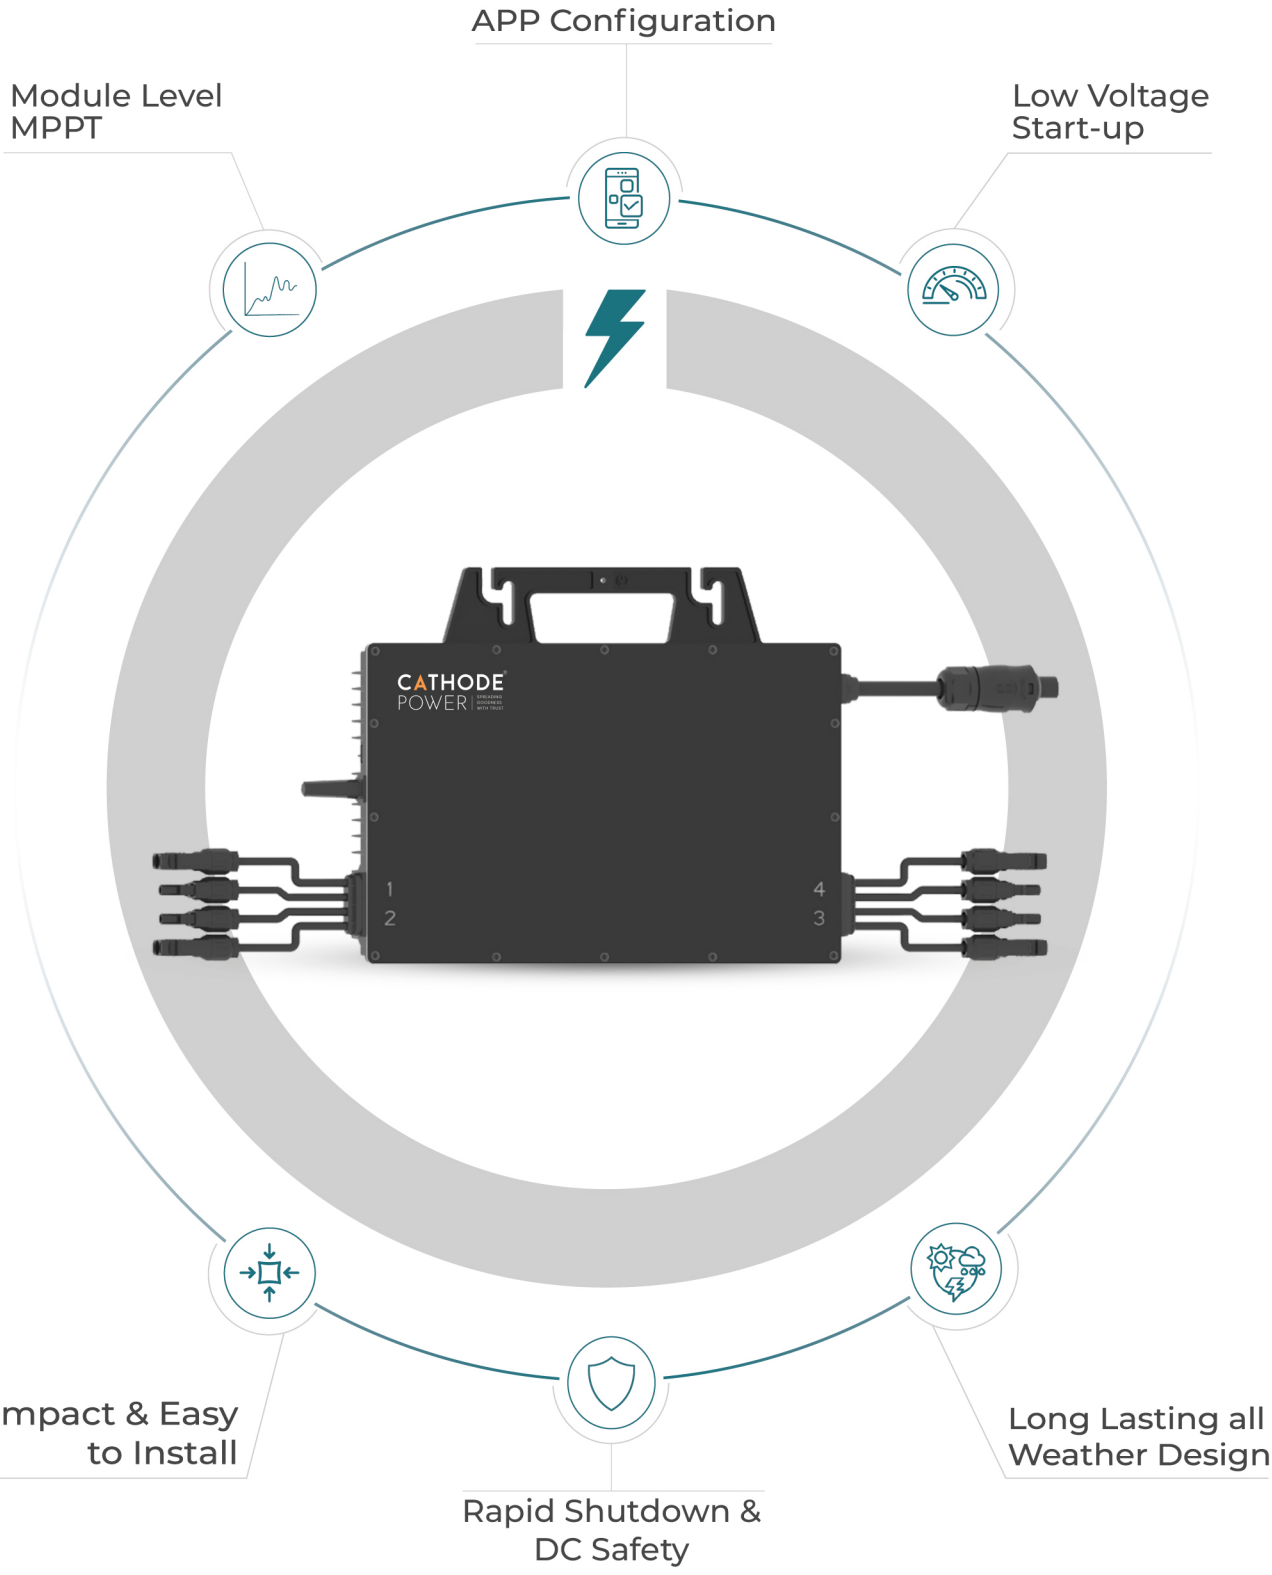

CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-1.6-MIC TO CP-2.4-MIC)

MODEL NO.	CP-1.6-MIC	CP-1.8-MIC	CP-2.0-MIC	CP-2.2-MIC	CP-2.4-MIC
Input (DC)					
Max. DC Input Power	1760kWp	1980kWp	2200kWp	2420kWp	2640kWp
Max. DC Input Voltage (Per MPPT)	60V				
MPPT Voltage Range	16V - 60V				
Max. MPPT Current	20A				
Max. Short-Circuit Current	25A				
Quantity of MPPT	4				
Output (AC)					
Rated Voltage	230V				
Max. Current	6.96A	7.83A	8.70A	9.57A	10.44A
Rated Frequency	50Hz				
Rated Power	1600W	1800W	2000W	2200W	2400W
Max. Apparent Power	1600VA	1800VA	2000VA	2200VA	2400VA
Power Factor Range	0.8 Leading To 0.8 Lagging				
Efficiency					
Peak Inverter Efficiency	97.6%				
Nominal MPPT Efficiency	99.9%				
EU Efficiency	96.3%				
Night Time Power Consumption	<50				
General Data					
Dimensions (LxWxH) (mm)	331/218/40mm				
Weight	5.5kg				
Operating Temperature Range	-40°C - 60°C				
Protection Rating	IP67				
Cooling	Natural Convection				
Relative Humidity	0-100%				
Monitoring	WIFI				
Communication	RS485				
Type Of Isolation	Isolated HF Transformer				
Max. Operating Altitude Without Derating	2000m				
Overvoltage Category	DC II : AC III				
Warranty	10 Years				

LITHIUM BATTERIES (WALL MOUNTED)

51.2V100Ah | 51.2V200Ah

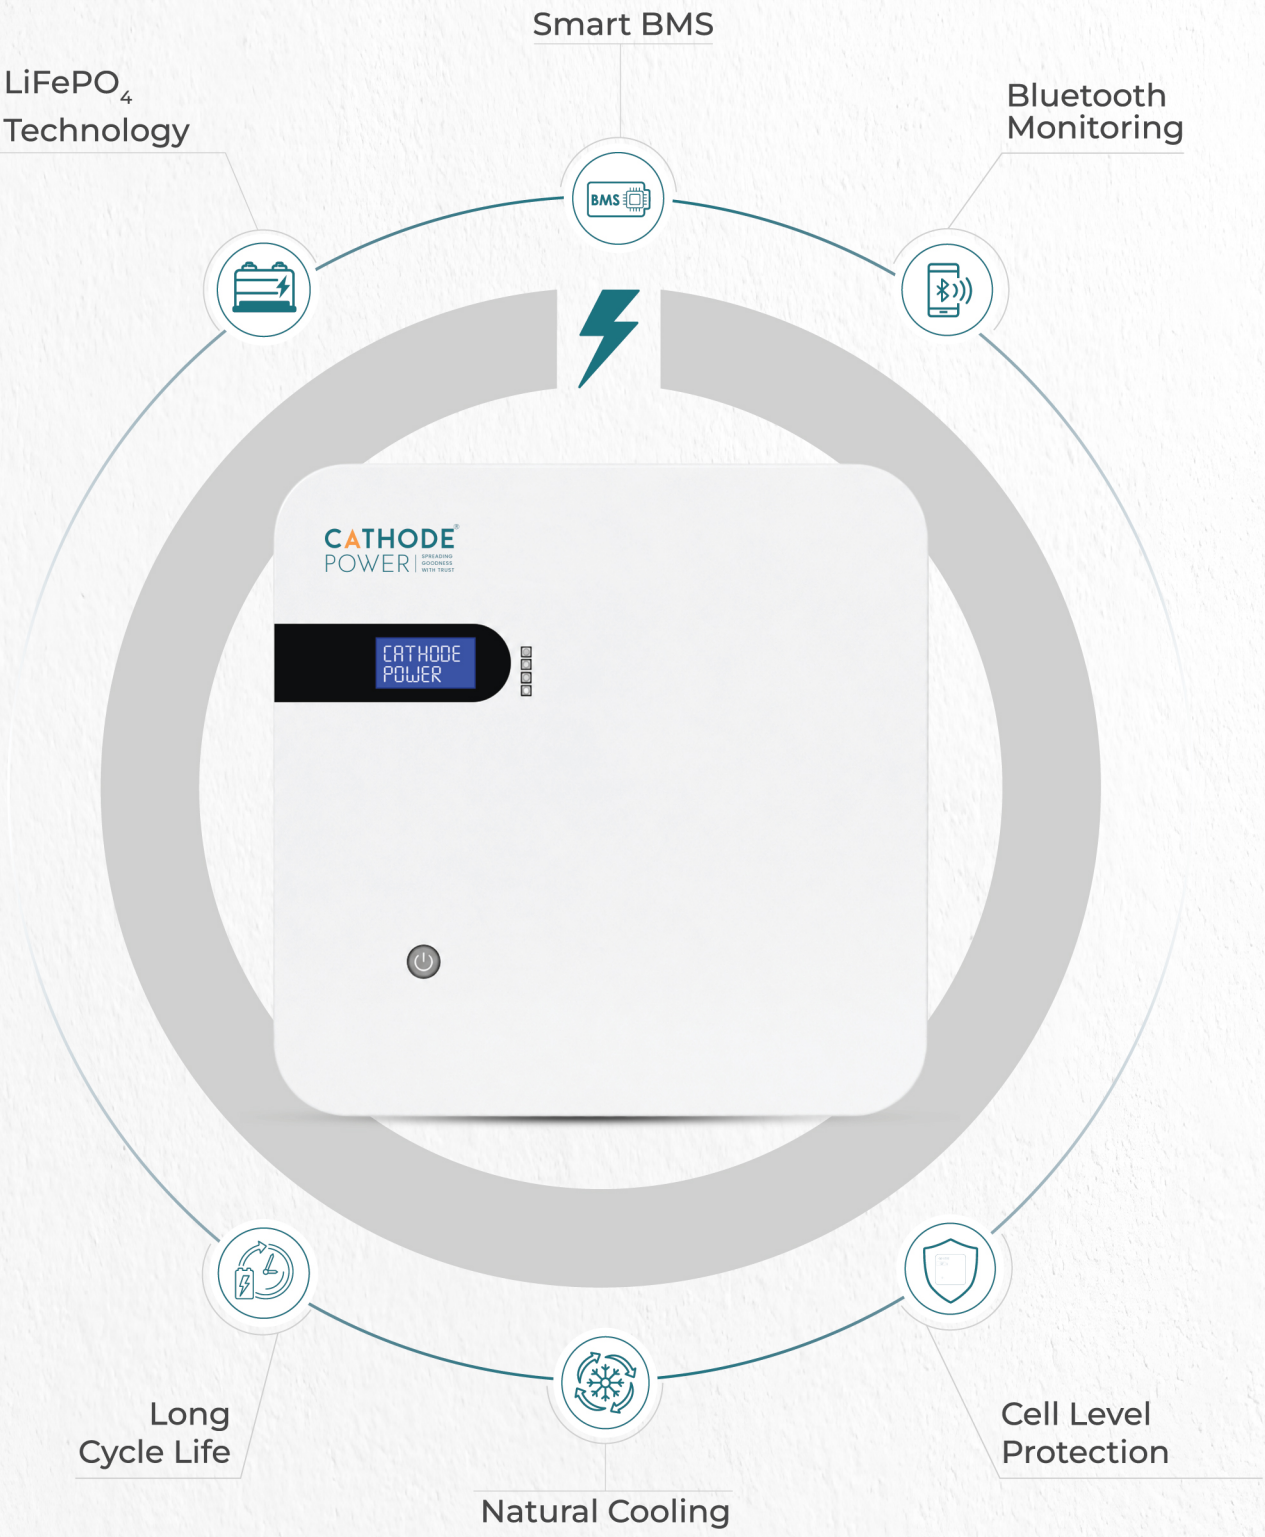

CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-51.2V100Ah & CP-51.2V200Ah)

PARAMETER	CP-51.2V100Ah	CP-51.2V200Ah
Nominal Voltage	51.2V	
Nominal Capacity	100Ah	200Ah
Nominal Energy	5.12kWh	10.24kWh
Cell Type	LiFePO4	
Combination Mode	16S1P	16S2P
BMS Configuration	16S100A	16S200A
Operating Voltage Range	41.6V-57.6V	
Standard Charge Current	20A 0.2C	40A 0.2C
Maximum Continue Charge Current	50A 0.5C	100A 0.5C
Standard Discharge Current	50A 0.5C	100A 0.5C
Maximum Continue Discharge Current	100A 1C	200A 1C
Cut-off Charge Voltage	57.6V	
Cut-off Discharge Voltage	41.6V	
Weight	48Kg	85Kg
Dimension (L/W/H) (mm)	508.5x469x155mm	515x505x240mm
Power Cable Outlet Mode	Front	
Cycle Life	≥3000/6000 Cycle, 80% DOD, 25°C	
Case Material	Metal	
Cooling Type	Natural Cooling	
Operating Temperature	Charging: 0°C ~ 50°C	/ Discharge: -20°C ~ 60°C
Relative Humidity	10% - 95% RH	
Storage Temperature	< 3 Month - 10°C ~ 25°C	
Instalation Mode	Wall Mounting	
Remote Mode	Bluetooth	
Communication Mode	CAN, RS485, RS232	

LITHIUM BATTERIES (RACK MOUNTED)

51.2V100Ah | 51.2V200Ah

Wide Operating Temp.

$LiFePO_4$ Technology

Multi Communication

Long Battery Back-up

Smart BMS

Long Cycle Life

CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-51.2V100Ah & CP-51.2V200Ah)

PARAMETER	CP-51.2V100Ah	CP-51.2V200Ah
Nominal Voltage	51.2V	
Nominal Capacity	100Ah	200Ah
Nominal Energy	5.12kWh	10.24kWh
Cell Type	LiFePO4	
Combination Mode	16S1P	16S2P
BMS Configuration	16S100A	16S200A
Operating Voltage Range	41.6V-57.6V	
Standard Charge Current	20A 0.2C	40A 0.2C
Maximum Continue Charge Current	50A 0.5C	100A 0.5C
Standard Discharge Current	50A 0.5C	100A 0.5C
Maximum Continue Discharge Current	100A 1C	200A 1C
Cut-off Charge Voltage	41.6V	
Cut-off Discharge Voltage	57.6V	
Weight	43Kg	85Kg
Dimension (L/W/H) (mm)	442x485x178mm	635x442x267mm
Power Cable Outlet Mode	Front	
Cycle Life	≥3000/6000 Cycle, 80% DOD, 25°C	
Case Material	Metal	
Cooling Type	Natural Cooling	
Operating Temperature	Charging: 0°C ~ 50°C	/ Discharge: -20°C ~ 60°C
Relative Humidity	10% - 95% RH	
Storage Temperature	< 3 Month - 10°C ~ 25°C	
Instalation Mode	Rack Mounting	
Remote Mode	Bluetooth	
Communication Mode	CAN, RS485, RS232	

THE SOLAR CLOUD
THE SOLAR CLOUD
THE SOLAR CLOUD
THE SOLAR CLOUD
THE SOLAR CLOUD
THE SOLAR CLOUD
THE SOLAR CLOUD
THE SOLAR CLOUD
THE SOLAR CLOUD
Powering a Brighter Tomorrow
Loading...
Version 1.0.0

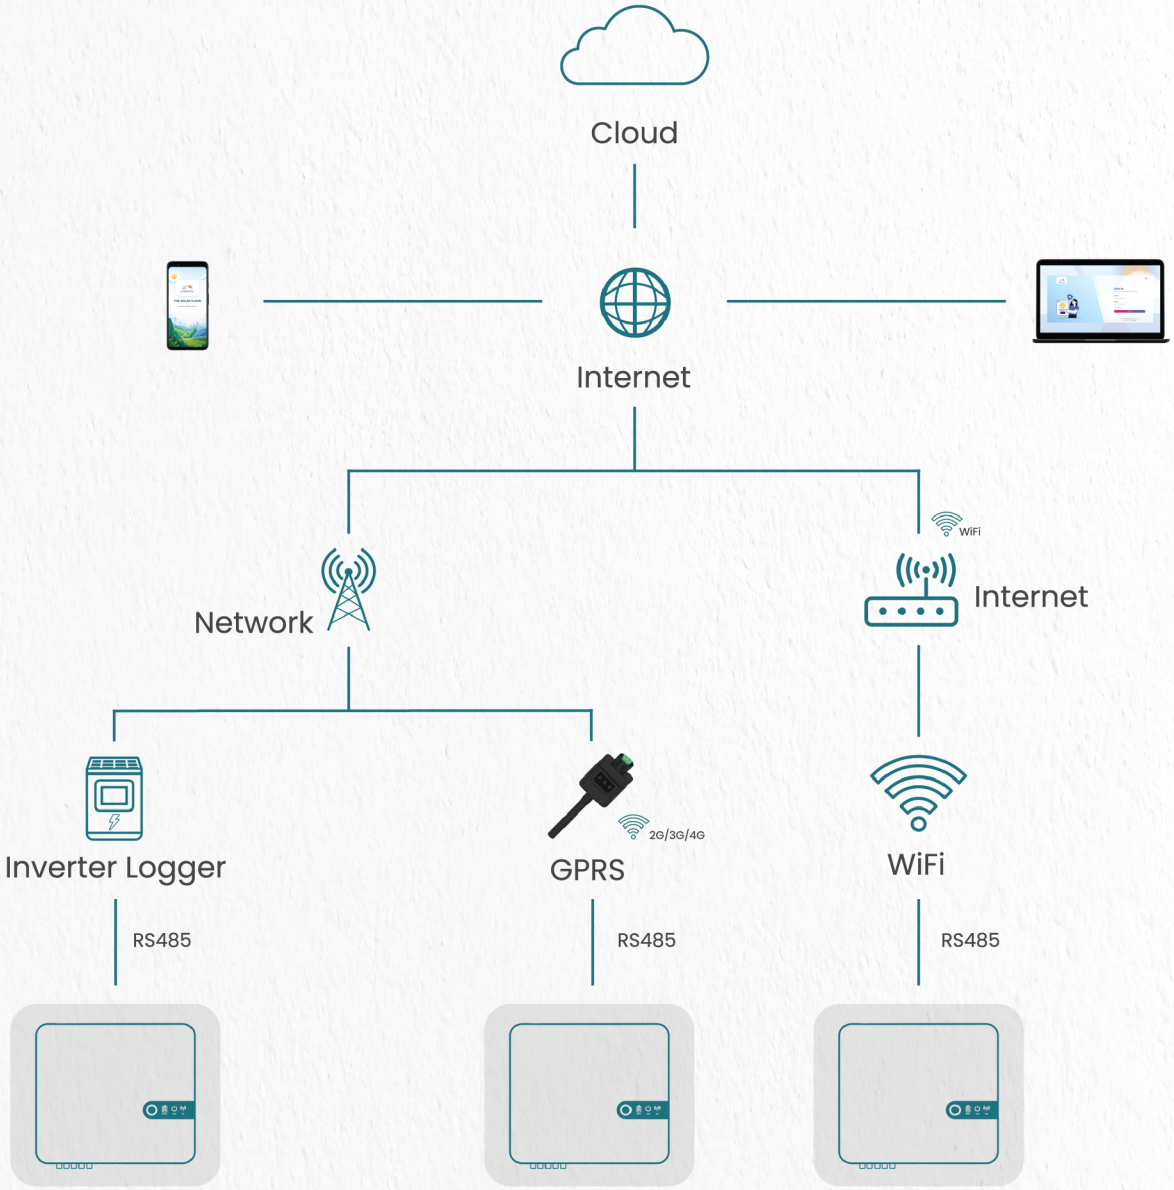
Cloud
Internet
Network
WiFi
Internet
Inverter Logger
2G/3G/4G
GPRS
WiFi
RS485
RS485
RS485

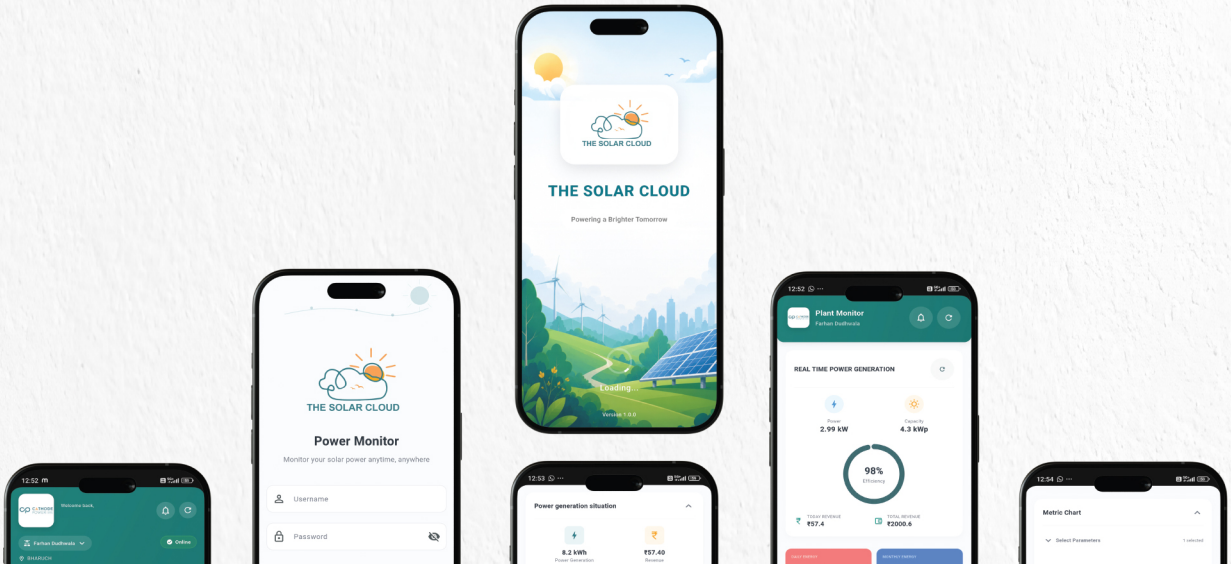
THE SOLAR CLOUD
Powering a Brighter Tomorrow
Loading...
Power Monitor
Monitor your solar power anytime, anywhere
Username
Password
Plant Monitor
REAL TIME POWER GENERATION
2.99 kW
4.3 kWp
98%
Power generation situation
Metric Chart

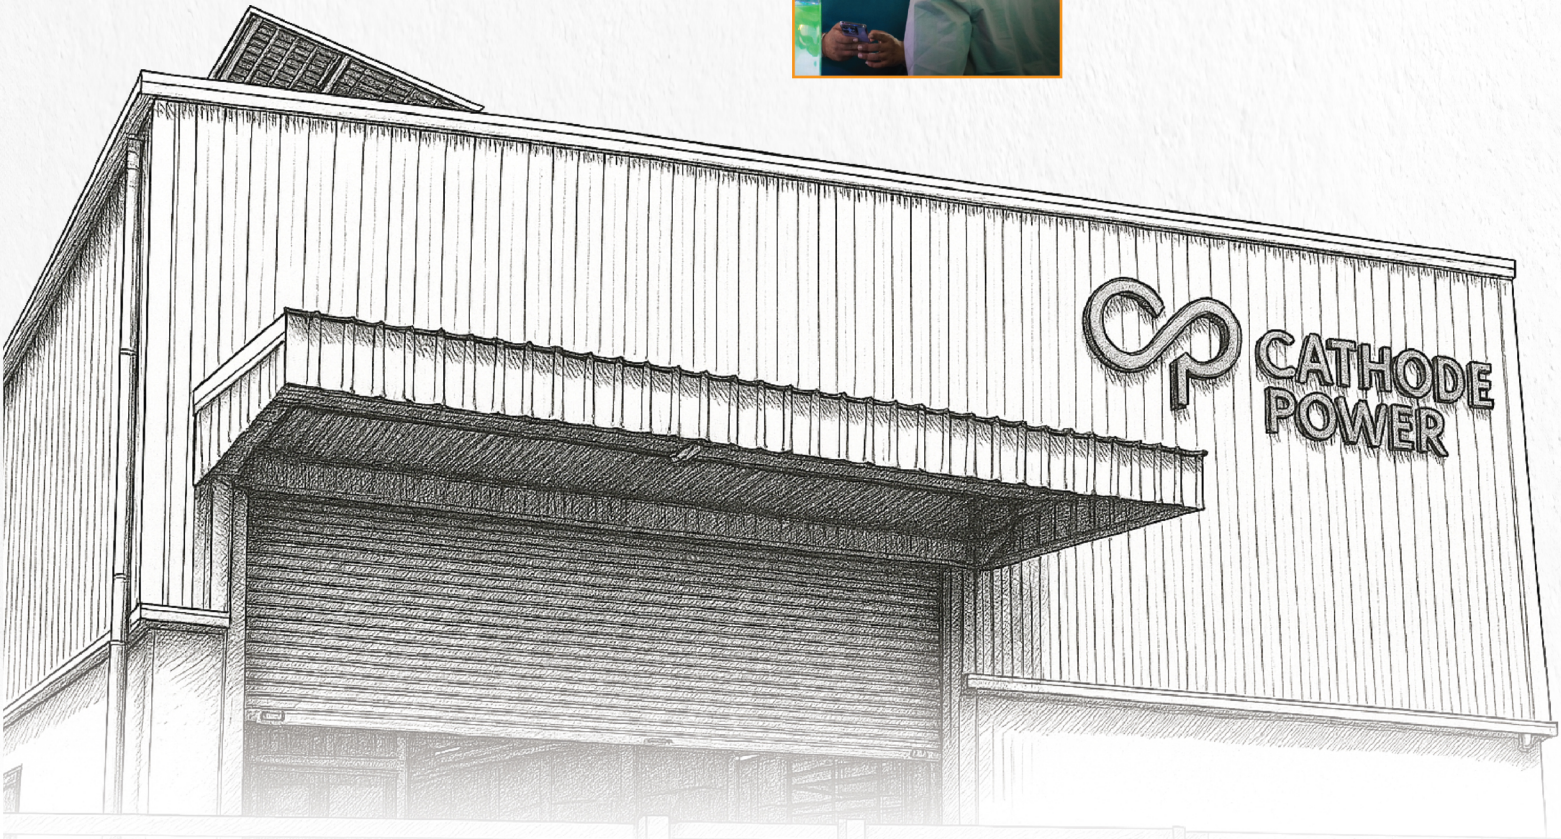

PEOPLE POWERING CATHODE

CATHODE POWER | SPREADING GOODNESS WITH TRUST

PAN INDIA PRESENCE

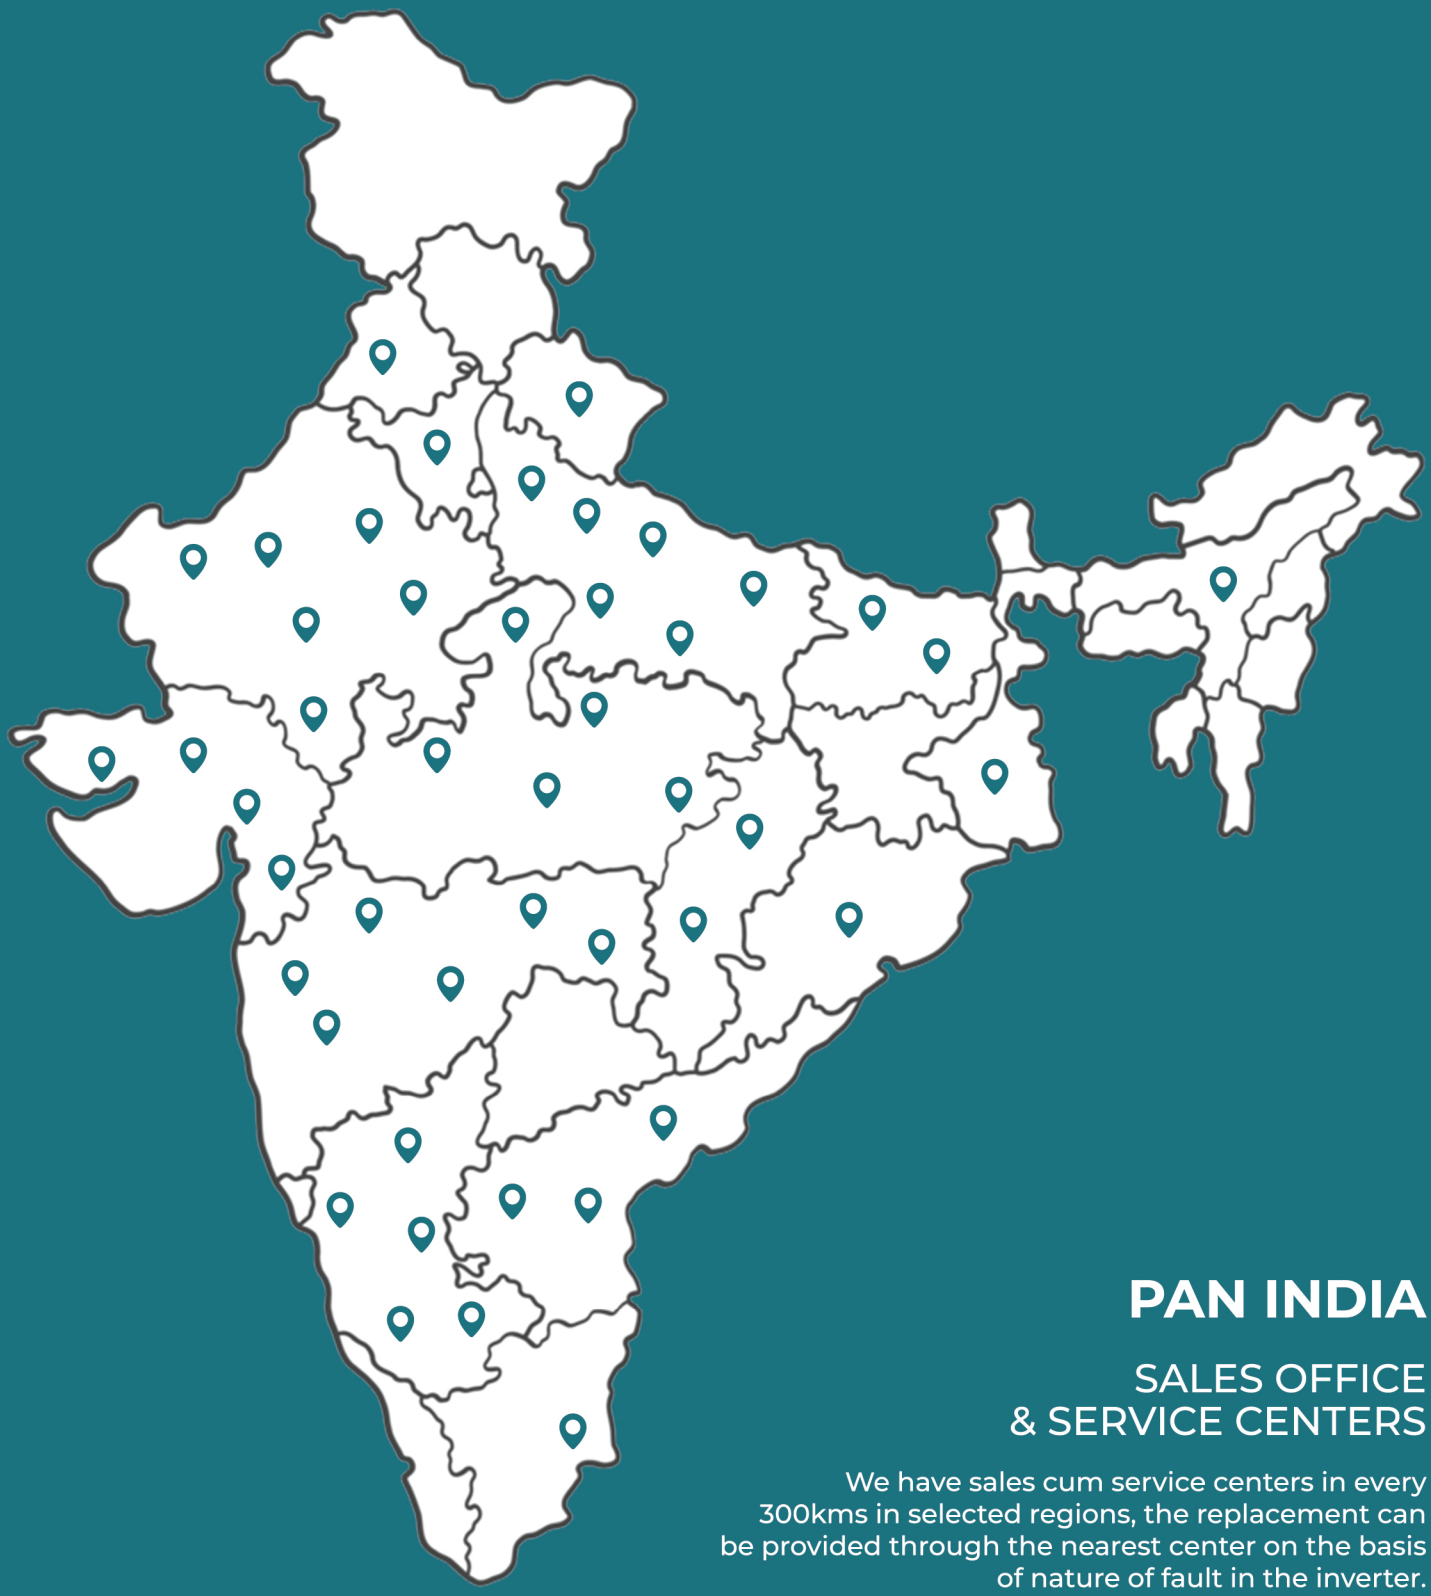

PAN INDIA

SALES OFFICE & SERVICE CENTERS

We have sales cum service centers in every 300kms in selected regions, the replacement can be provided through the nearest center on the basis of nature of fault in the inverter.

#YEHSWADESHIHAI

CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

Cathode Power Private Limited.

Corporate Office: SF 201-203, Fortune Platinum, Nr. Tulsidham Circle, Manjalpur, Vadodara, Gujarat - 390011

Factory Address: R.S. No.229, Sugar Factory, Ta. Karjan, Opp. Gandhara, Gandhara, Gujarat-391210

Contact: +91 98002 68002

Email: hello@cathodepower.com

Website: www.cathodepower.com