
CATHODE®
POWER | SPREADING GOODNESS WITH TRUST

SMART • RELIABLE • EFFICIENT

No.1 Choice of Solar EPCs Across India

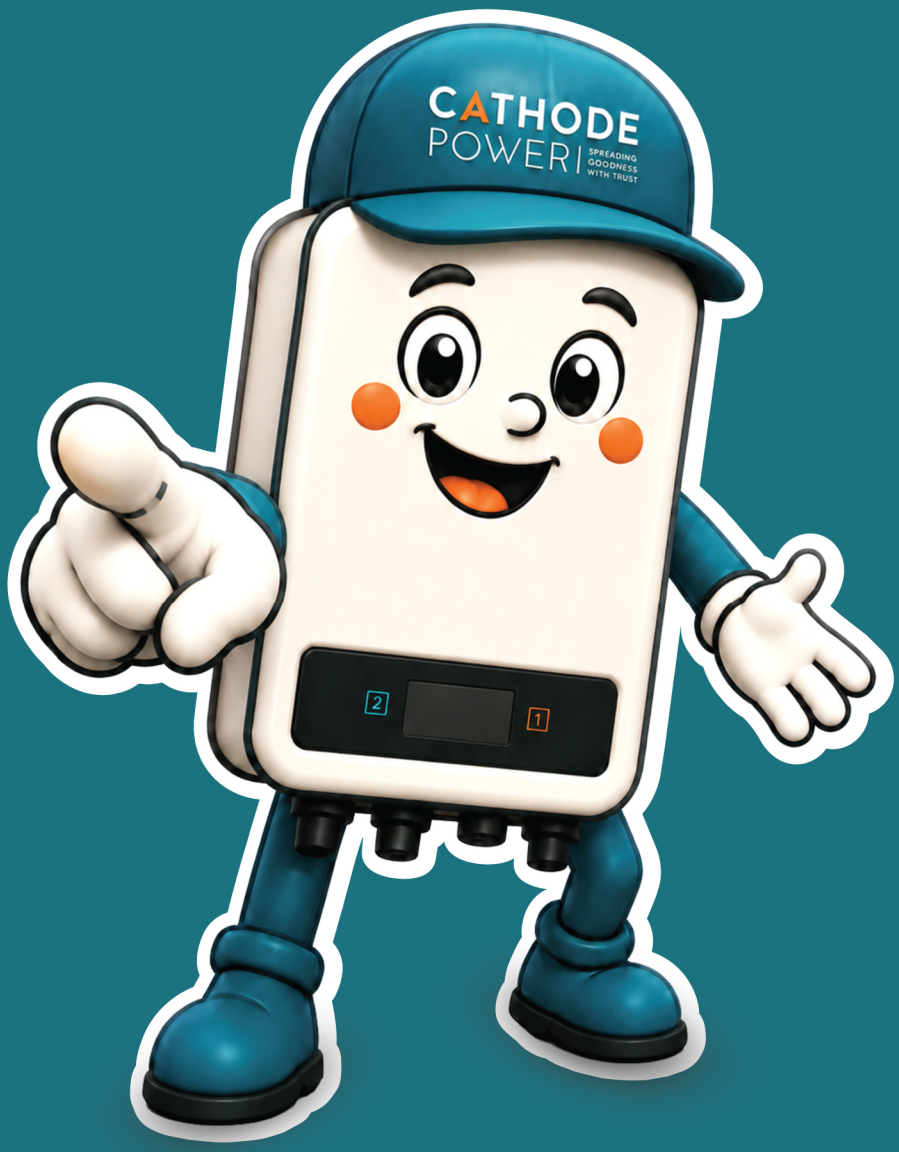


CATHODE POWER | SPREADING GOODNESS WITH TRUST

Empowering Epcs To Build A Sustainable Future With Smart, Efficient & Reliable Inverter Solutions.

On-Grid | Hybrid | Micro | BESS

WHO'S GOT YOUR BACK ON EVERY INSTALLATION?

YOUR POWER PARTNER FROM INSTALLATION TO AFTER - SALES

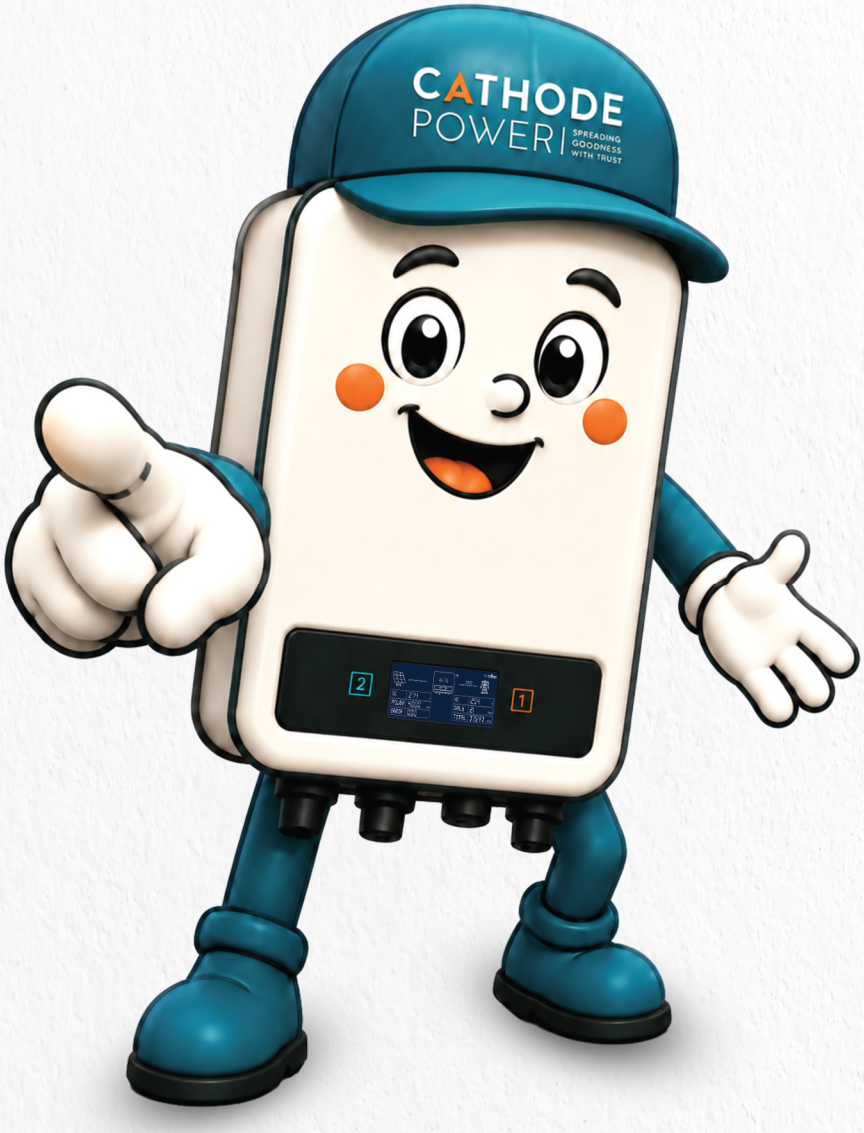

SINGLE PHASE HYBRID INVERTER

3.6kW | 6.2kW

APP Configuration

Higher Efficiency

Power Export Limit



Compact & Easy to Install

Smart Cooling Fan

IP65 Water & Dust Resistance


CATHODE POWER | SPREADING GOODNESS WITH TRUST

TECHNICAL DATA
(CP-3.6kW & CP-6.2KW)

MODEL NO.	3.6KW/24V*	6.2KW/48V*
DC Side | Input Parameters		
Input Sources	L+N+PE	
Rated Input Voltage	220/230/240V	
Voltage Range	90-280VAC±3V(APL Mode)170-280VAC±3V(UPS Mode)	
Frequency	50Hz (Auto Adaptive)	
AC Side | Output Parameters		
The Battery Inverts (Rated Power)	3600W	6200W
Photovoltaic Inverter (Rated Power)	4500W	6500W
Waveform	Pure Sine Wave	
Transfer Time (Adjustable)	Computer (UPS Mode)10ms, Appliance(APL Mode)20ms	
Peak Power	7200VA	12400VA
Overload Capacity	Battery Mode11s@105%~150% Load;2s@150%~200% Load;400ms@>200% Load	
Grid - Connected Operation		
Output Voltage	220/230/240VAC±5%	
Feed into the Grid Voltage Range	195-253VA	
Feed into the Grid Frequency Range	49-51±1Hz/59-61±1Hz	
Nominal Output Current	15.7A	26.9A
Power Factor Range	>0.99	
Maximum Conversion Efficiency (DC/AC)	98%	
Battery		
Battery Voltage	24Vdc	48Vdc
Constant Charging Voltage (Adjustable)	28.2Vdc	56.4Vdc
Floate Charging Voltage (Adjustable)	27Vdc	54Vdc
Battery	Li-ion**, Tubular, Flat Plate, SMF/VRLA or Any Local Battery Compatible	
Chargers		
PV Charging Mode	MPPT	MPPT
Max. PV Input Power	5000W	7500W
MPPT Tracking Range	60-500Vdc	90-500Vdc
Best Voltage	300~400V	300~400V
Max. PV Input Voltage	500Vdc	500Vdc
PV Max Input Current	18A	27A
Max. PV Charging Current	120A	120A
Max. AC Charging Current	100A	100A
Max. Charging Current	120A	120A
Display		
LCD Interface	CAN Display Running mode/Load/Input/Output	
Interface		
RS232	Baud Rate2400	
Extend the Socket Communication Interface	Lithium Battery BMS Communication Card WifiCard, Dry Contact	
Parallel Machine Interface	No Parallel Function	Parallel Machine (Network) Function
Environments		
Operating Temperature Range	-10 To 50°C	
Humidity	20%~95% (Non-Condensing)	
Storage Temperature	-15 To 60°C	
Altitude	-25°C To 60°C (>45°C Derating)	
Relative Humidity	0-100%	
Altitude	Altitude Not over 1000m, Derating over 1000m, Max 4000m, Refer to IEC62040	
Noise	<50db	

CATHODE POWER | SPREADING GOODNESS WITH TRUST

PAN INDIA PRESENCE

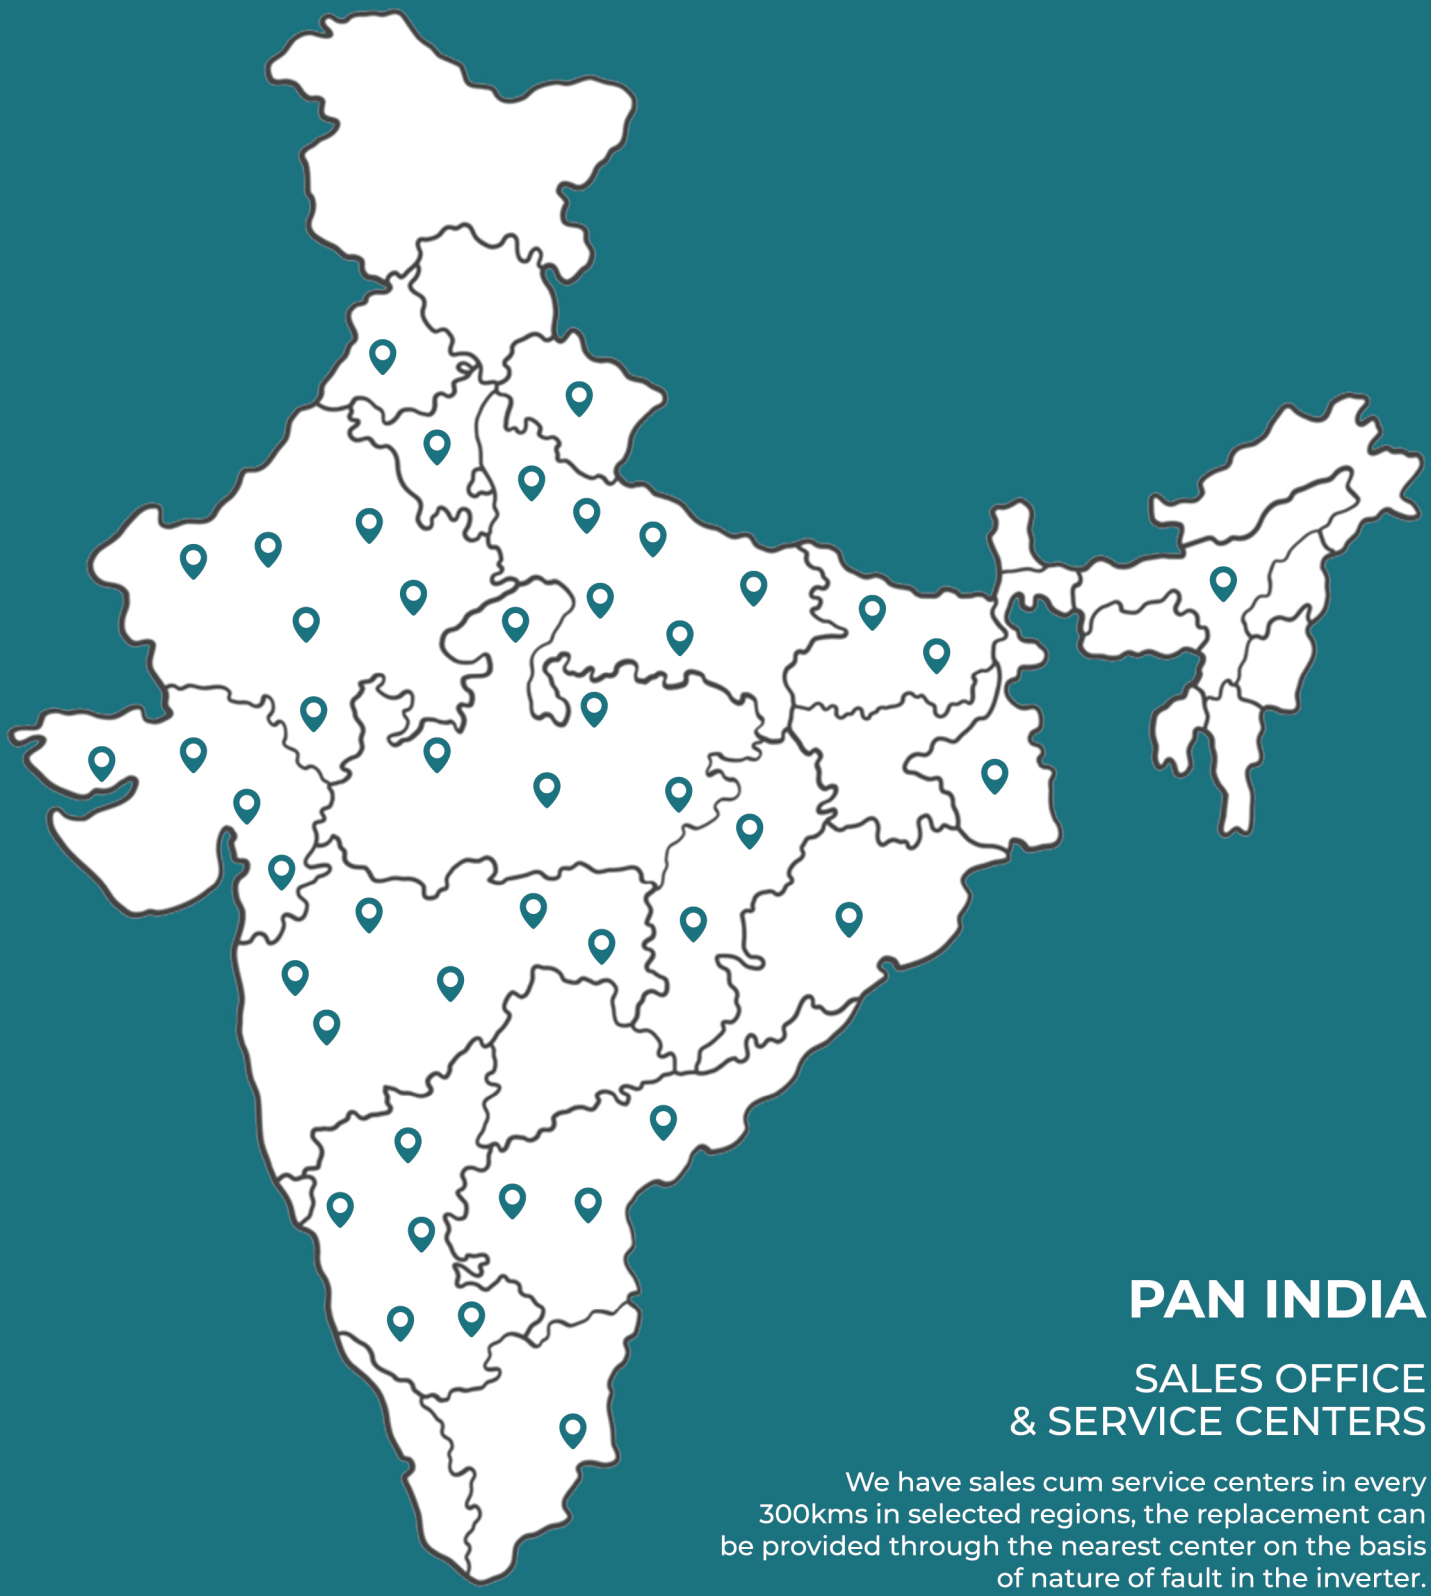

PAN INDIA

SALES OFFICE & SERVICE CENTERS

We have sales cum service centers in every 300kms in selected regions, the replacement can be provided through the nearest center on the basis of nature of fault in the inverter.

#YEHSWADESHIHAI

CATHODE® POWER

SPREADING GOODNESS WITH TRUST

Cathode Power Private Limited.

Corporate Office: SF 201-203, Fortune Platinum, Nr. Tulsidham Circle, Manjalpur, Vadodara, Gujarat - 390011

Factory Address: R.S. No.229, Sugar Factory, Ta. Karjan, Opp. Gandhara, Gandhara, Gujarat-391210

Contact: +91 98002 68002

Email: hello@cathodepower.com

Website: www.cathodepower.com